

# NV4V31SF

## Data Sheet

Blue-Violet Laser Diode  
 405 nm Blue-Violet Laser Light Source

R08DS0070EJ0100  
 Rev.1.00  
 Jun 20, 2013

### DESCRIPTION

The NV4V31SF is a blue-violet laser diode with a wavelength of 405 nm. A newly developed LD chip structure achieves a high optical power output of 175 mW (CW). The NV4V31SF can provide excellent linearity from low to high output at high temperatures, and reduces the unevenness of beam divergence.

### FEATURES

- High optical output power  $P_o = 175 \text{ mW @CW}$
- Peak wavelength  $\lambda_p = 405 \text{ nm TYP.}$
- Single transverse mode (lateral)
- Wide operating temperature range  $T_C = -5 \text{ to } +85^\circ\text{C}$
- $\phi 5.6 \text{ mm CAN}$  package

### APPLICATIONS

- Blue-violet laser light source




The mark <R> shows major revised points.

The revised points can be easily searched by copying an "<R>" in the PDF file and specifying it in the "Find what:" field.

**NV4V31SF**

<R> **PACKAGE DIMENSIONS (UNIT: mm)**

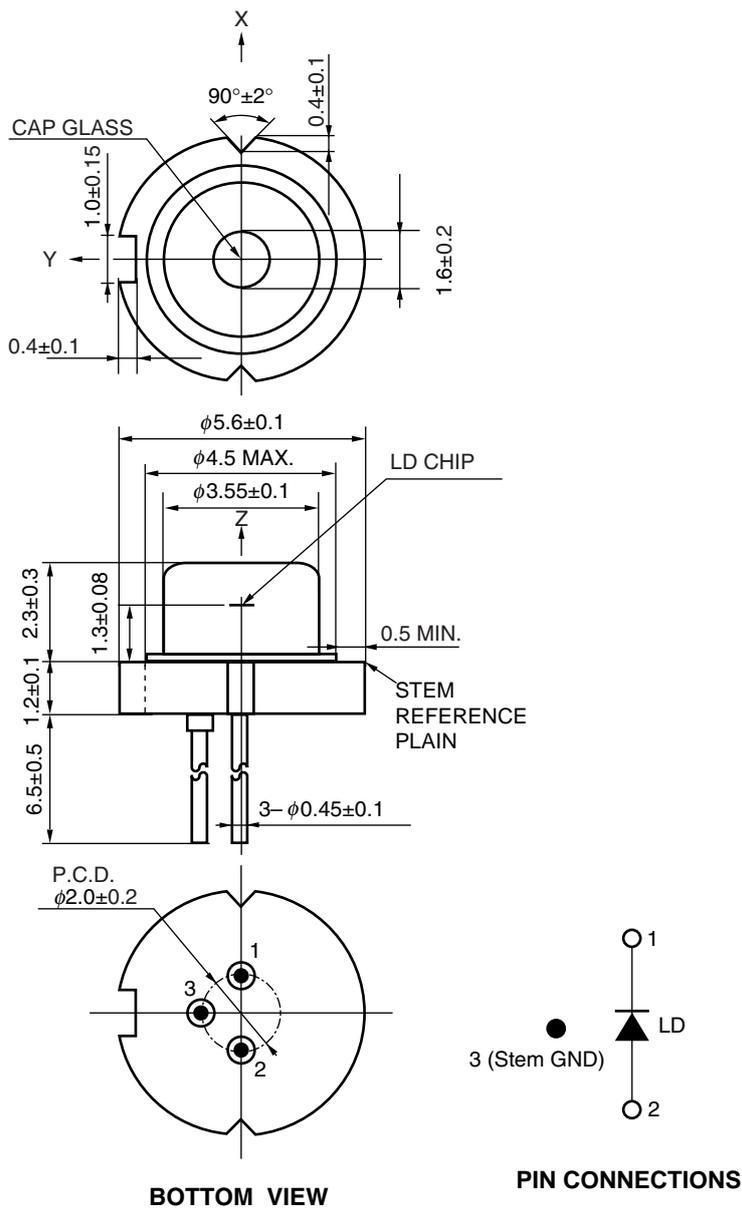

**Remark** Cap glass thickness :  $0.25 \pm 0.03$  mm  
 Cap glass refractive index : 1.53 ( $\lambda = 405$  nm)

## NV4V31SF

### <R> ORDERING INFORMATION

Part Number	Order Number	Rank	Packing Style
NV4V31SF	NV4V31SF-A	HV	Tray Packing (100 p/Tray), With data
		XV	Individual Packing (for samples), With data

### ABSOLUTE MAXIMUM RATINGS ( $T_C = 25^\circ\text{C}$ , unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Optical Output Power (CW)	$P_o$	210	mW
Reverse Voltage of LD	$V_R$	2	V
Operating Case Temperature	$T_C$	-5 to +85	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to +85	$^\circ\text{C}$

### RECOMMENDED OPERATING CONDITIONS ( $T_C = 25^\circ\text{C}$ , unless otherwise specified)

Parameter	Symbol	MAX.	Unit
Optical Output Power (CW)	$P_o$	175	mW


### ELECTRO-OPTICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ , unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Threshold Current	$I_{th}$	CW		35	55	mA
Operating Current	$I_{op}$	CW, $P_o = 175$ mW		150	200	mA
Operating Voltage	$V_{op}$	CW, $P_o = 175$ mW		5.0	6.5	V
Slope Efficiency	$\eta_d$	CW, $P_o = 20$ mW, 175 mW	1.1	1.55		W/A
Peak Wavelength	$\lambda_p$	CW, $P_o = 175$ mW	400	405	410	nm
Beam Divergence (lateral)	$\theta_l$	CW, $P_o = 175$ mW	6	9	12	deg.
Beam Divergence (vertical)	$\theta_\perp$		15	20	25	
Position Accuracy Angle (lateral)	$\Delta\theta_l$	CW, $P_o = 175$ mW	-3	0	3	deg.
Position Accuracy Angle (vertical)	$\Delta\theta_\perp$		-3	0	3	


**NV4V31SF**

**TYPICAL CHARACTERISTICS**  
( $T_c = 25^\circ\text{C}$ , unless otherwise specified)


**OPTICAL OUTPUT POWER vs. FORWARD CURRENT**

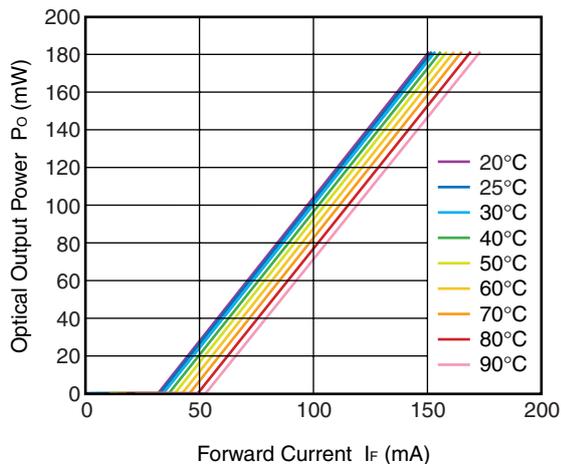


**FORWARD VOLTAGE vs. FORWARD CURRENT**

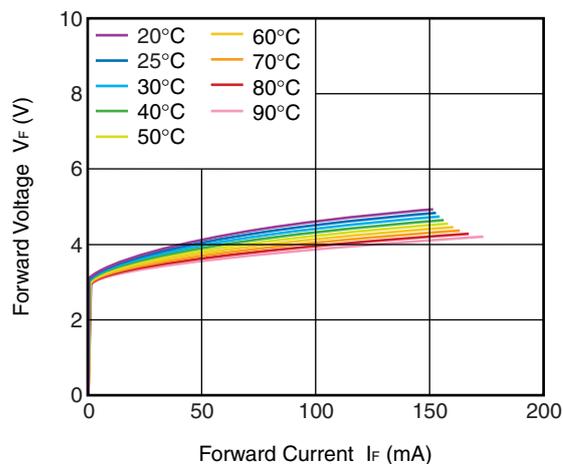


**POWER DEPENDENCE OF PEAK WAVELENGTH**

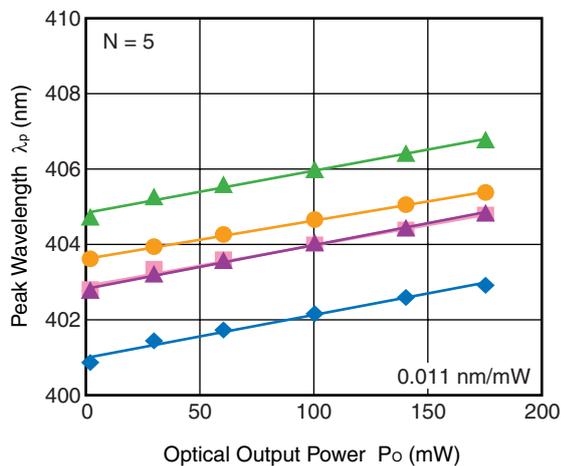


**TEMPERATURE DEPENDENCE OF PEAK WAVELENGTH**

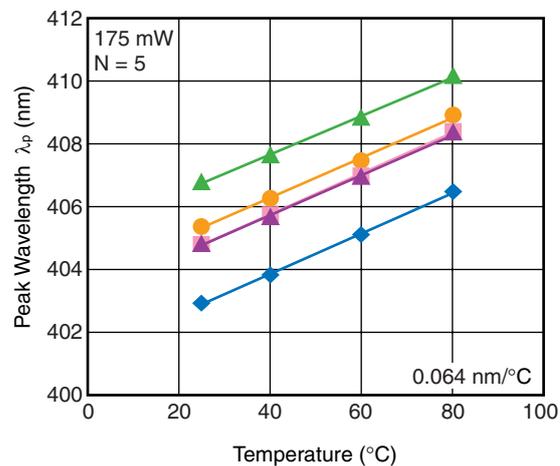

**FFP (LATERAL)**

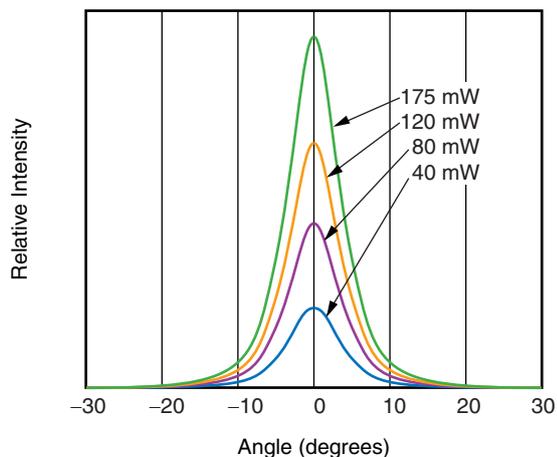


**FFP (VERTICAL)**

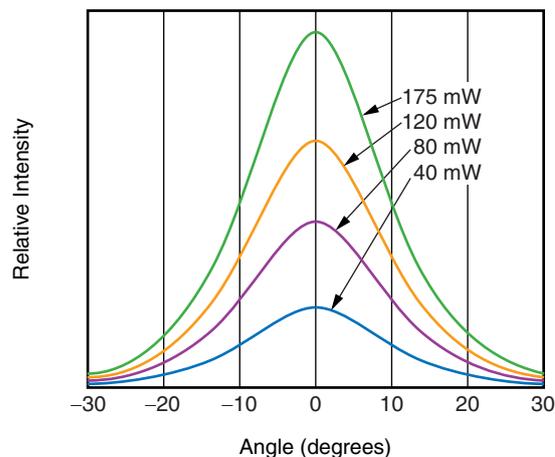


**Remark** The graphs indicate nominal characteristics.

**NV4V31SF**

**Wavelength Spectrum (100 mW)**

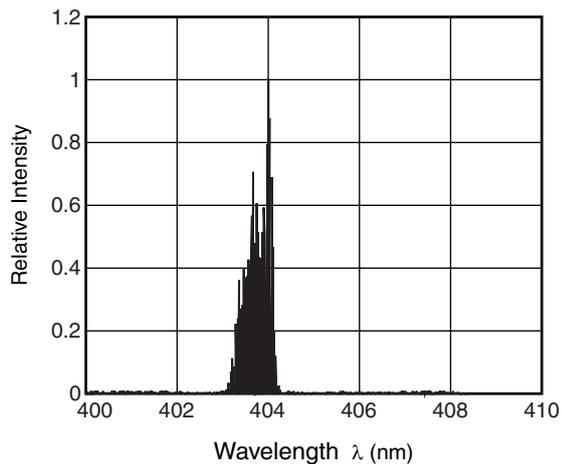

**Wavelength Spectrum (175 mW)**

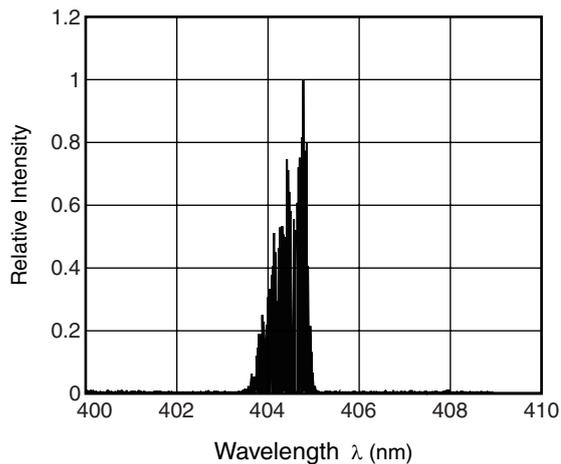

**Remark** The graphs indicate nominal characteristics.

**NOTES ON HANDLING**

1. Recommended soldering conditions
  - Peak Temperature            $\leq 350^{\circ}\text{C}$
  - Time                            $\leq 3$  seconds
  - Soldering of leads should be made at the point 2.0 mm from the root of the lead
  - This device cannot be mounted using reflow soldering.
  
2. Usage cautions
  - (1) Take the following steps to ensure that the device is not damaged by static electricity.
    - Wear an antistatic wrist strap when soldering the device.  
We recommend a strap with a 1 M $\Omega$  resistor.
    - Make sure that the work table and soldering iron are grounded.
    - Make sure that the soldering iron does not leak.
  
  - (2) Do not subject the package to undue stress.  
The package has a tensile strength of 1N or less.  
Do not exceed this rating. Also, avoid bending the leads as much as possible.  
If the leads must be bent, bend them only once, making sure to anchor the stem base of the lead.
  
  - (3) Do not allow the cap glass of the package to become scratched or dirty.  
Also, do not subject the cap glass to external force.
  
  - (4) Be sure to attach a heat sink to sufficiently dissipate heat.
  
  - (5) Use the device as soon as possible after opening the bag.


**SAFETY INFORMATION ON THIS PRODUCT**



VISIBLE LASER RADIATION  
 AVOID EYE OR SKIN EXPOSURE TO  
 DIRECT OR SCATTERED RADIATION

OUTPUT POWER 3W MAX  
 WAVELENGTH 400 to 680nm  
 CLASS IIIb LASER PRODUCT

**SEMICONDUCTOR LASER**



**AVOID EXPOSURE-Invisible**  
 Laser Radiation is emitted from  
 this aperture

<p><b>Warning</b> Laser Beam</p>	<p>A laser beam is emitted from this diode during operation. If the laser beam or its reflection enters your eye, it may cause injury to the eye or loss of eyesight. (Note that, depending on the wavelength of the beam, the laser beam might not be visible.)</p> <ul style="list-style-type: none"> <li>• Do not look directly into the laser beam.</li> <li>• Avoid exposure to the laser beam, any reflected or collimated beam.</li> </ul>
----------------------------------	---

<b>Revision History</b>	<b>NV4V31SF Data Sheet</b>
-------------------------	----------------------------

Rev.	Date	Description	
		Page	Summary
0.01	Jan 23, 2013	–	First edition issued
1.00	Jun 20, 2013	p.2	Modification of <b>PACKAGE DIMENSIONS</b>
		p.3	Modification of <b>ORDERING INFORMATION</b>

All trademarks and registered trademarks are the property of their respective owners.
---

## NOTICE

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. California Eastern Laboratories and Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. California Eastern Laboratories has used reasonable care in preparing the information included in this document, but California Eastern Laboratories does not warrant that such information is error free. California Eastern Laboratories and Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. California Eastern Laboratories and Renesas Electronics do not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of California Eastern Laboratories or Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. California Eastern Laboratories and Renesas Electronics assume no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc. "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc. Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. California Eastern Laboratories and Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by California Eastern Laboratories or Renesas Electronics.
6. You should use the Renesas Electronics products described in this document within the range specified by California Eastern Laboratories, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. California Eastern Laboratories shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a California Eastern Laboratories sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. California Eastern Laboratories and Renesas Electronics assume no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of California Eastern Laboratories, who distributes, disposes of, or otherwise places the Renesas Electronics product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, California Eastern Laboratories and Renesas Electronics assume no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of California Eastern Laboratories.
12. Please contact a California Eastern Laboratories sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

**NOTE 1:** "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

**NOTE 2:** "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

**NOTE 3:** Products and product information are subject to change without notice.

**CEL Headquarters** • 4590 Patrick Henry Drive, Santa Clara, CA 95054 • Phone (408) 919-2500 • [www.cel.com](http://www.cel.com)

For a complete list of sales offices, representatives and distributors,  
Please visit our website: [www.cel.com/contactus](http://www.cel.com/contactus)