
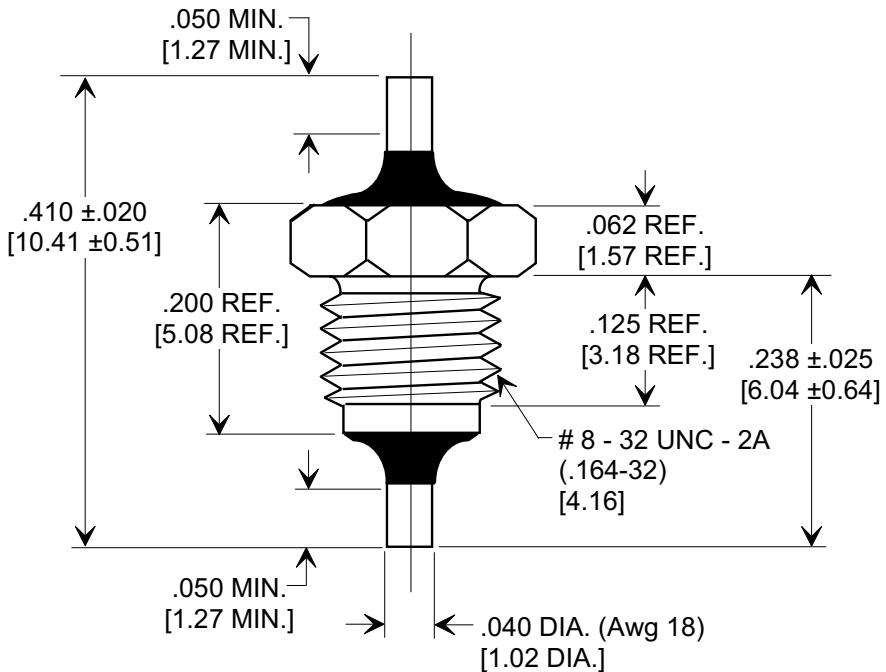
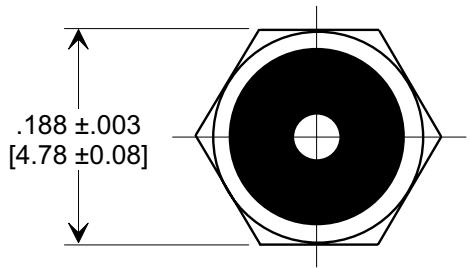



**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

Electrical Testing  
 per Tusonix standard  
 test plans and Mil-Std-202  
 Test Methods.

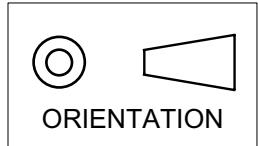

1500	125 VDC	15 A	3	5	20	40	50
MIN. CAP. (pF)	125° WORKING VOLTAGE	CURRENT VDC	4 MHz	10 MHz	100 MHz	500 MHz	18 GHz
MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220							

REVISION RECORD	Original Release C.O.	0	-TOLERANCES-- Unless Otherwise Specified	Title  <b>EMI FILTER</b> <b>MIL 15733/44.0002</b>
	WAS SK 7094-003-5. E.C. 6-1493			
<b>930528-2</b>	1	DIMS. REV. & ADDED. E.C. 5-11-94		
<b>940217-3</b>	2	RDN TO COMP FMT. ADDED DIM. .050 MIN. DEL. DIM. .013. S.M. 05-22-01		
<b>20010516-2-03</b>	3	REVISED TITLE. S.M. 10-11-01	DECIMAL ± .031 [.79]	Drawn S.M. 05-22-01
<b>20011005-5-09</b>	4		ANGLES ±	Scale 6 X
<b>TUSONIX</b> TUCSON, ARIZONA			Approved T.C. 05-22-01	
<b>A</b>		<b>4205-500</b>		