



**AO8807L**

## Dual P-Channel Enhancement Mode Field Effect Transistor

### General Description



The AO8807L uses advanced trench technology to provide excellent  $R_{DS(ON)}$ , low gate charge and operation with gate voltages as low as 1.8V. This device is suitable for use as a load switch.

- RoHS Compliant
- Halogen Free

### Features

$V_{DS}$  (V) = -12V  
 $I_D$  = -6.5 A ( $V_{GS}$  = -4.5V)  
 $R_{DS(ON)} < 20m\Omega$  ( $V_{GS}$  = -4.5V)  
 $R_{DS(ON)} < 24m\Omega$  ( $V_{GS}$  = -2.5V)  
 $R_{DS(ON)} < 30m\Omega$  ( $V_{GS}$  = -1.8V)

***ESD Protected!***

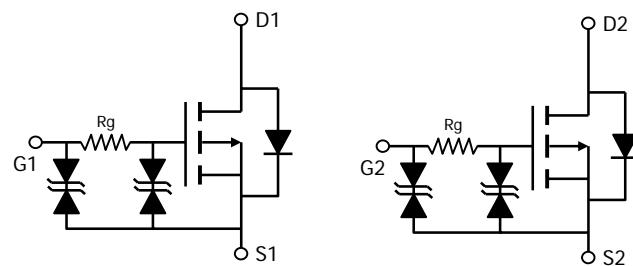

### Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	$V_{DS}$	-12	V
Gate-Source Voltage	$V_{GS}$	$\pm 8$	V
Continuous Drain Current	$I_D$	-6.5	A
$T_A=70^\circ C$		-5	
Pulsed Drain Current	$I_{DM}$	-60	
Power Dissipation <sup>B</sup>	$P_D$	1.4	W
$T_A=70^\circ C$		0.9	
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	°C

### Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient <sup>A</sup>	$R_{\theta JA}$	73	90	°C/W
Maximum Junction-to-Ambient <sup>AD</sup>		96	125	°C/W
Maximum Junction-to-Lead	$R_{\theta JL}$	63	75	°C/W



## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

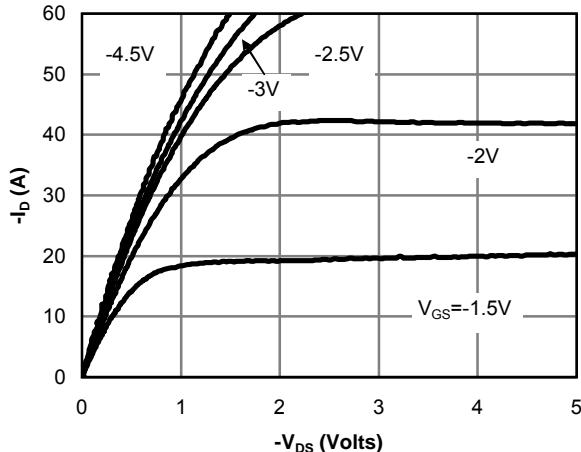


Figure 1: On-Region Characteristics(Note E)

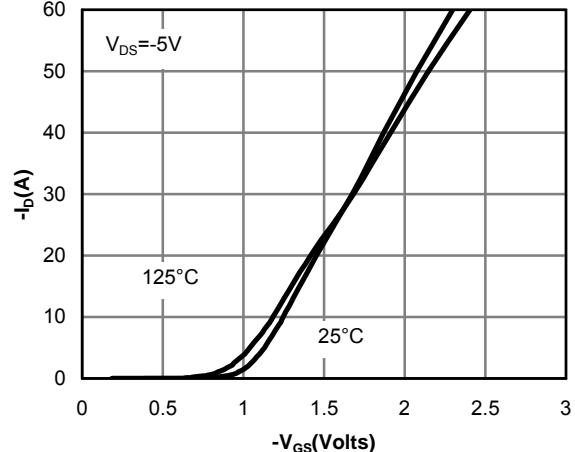


Figure 2: Transfer Characteristics(Note E)

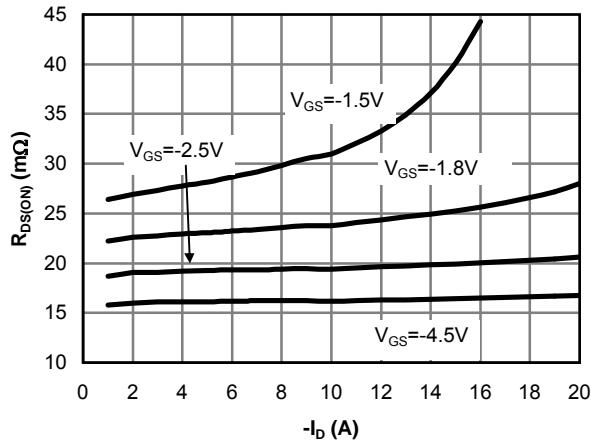


Figure 3: On-Resistance vs. Drain Current and Gate Voltage(Note E)

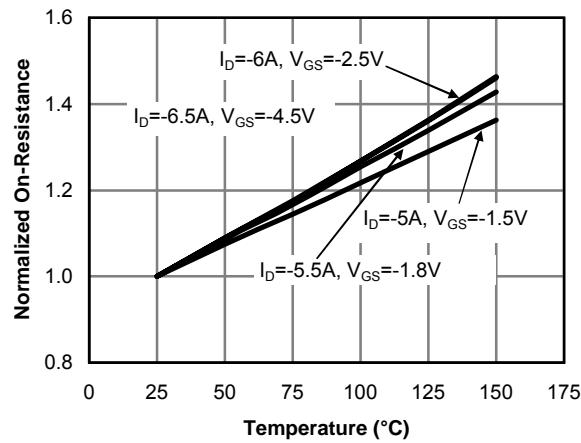


Figure 4: On-Resistance vs. Junction Temperature(Note E)

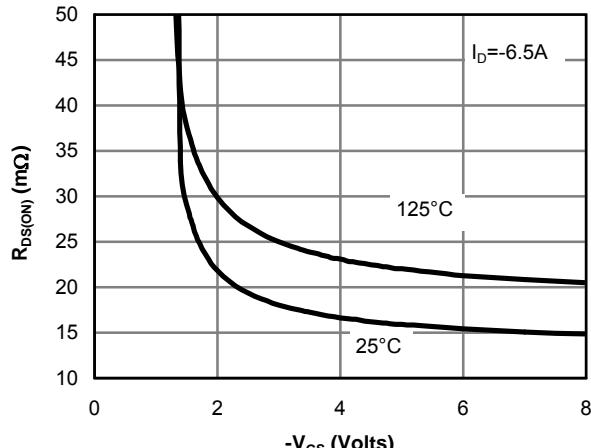


Figure 5: On-Resistance vs. Gate-Source Voltage(Note E)







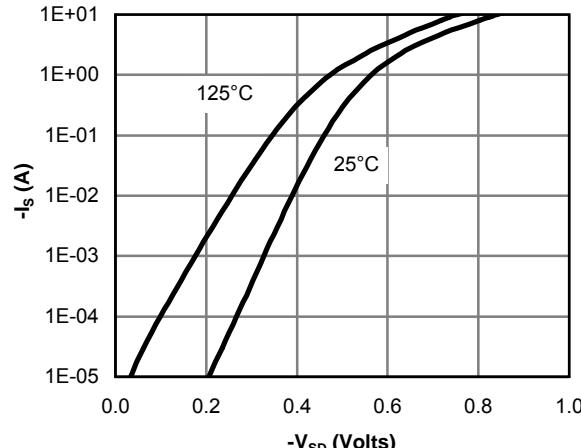


Figure 6: Body-Diode Characteristics(Note E)


## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

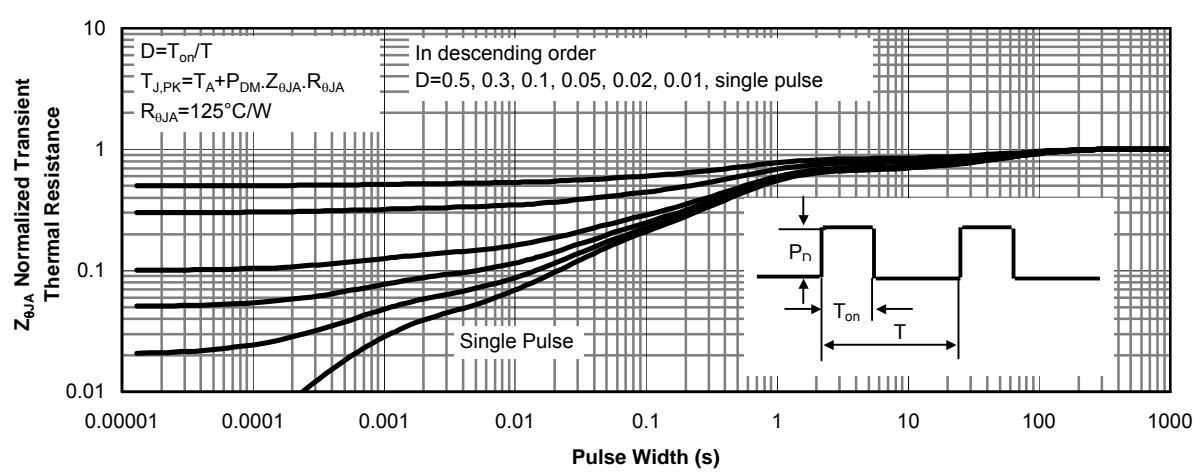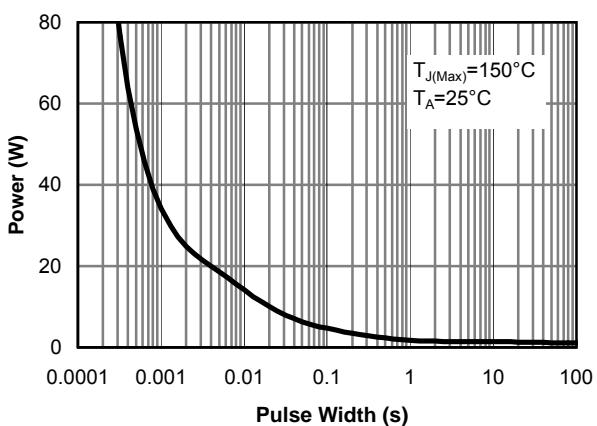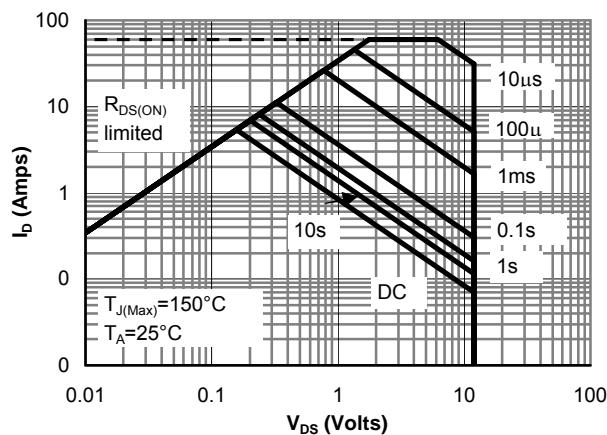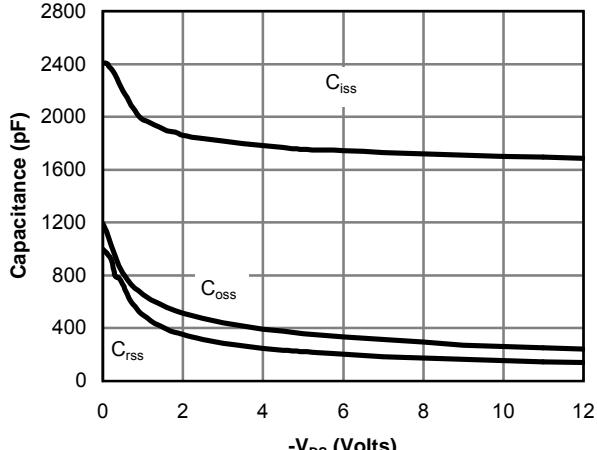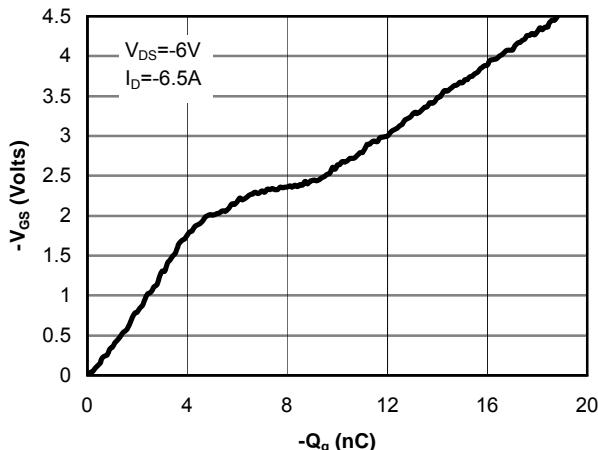

## Gate Charge Test Circuit &amp; Waveform

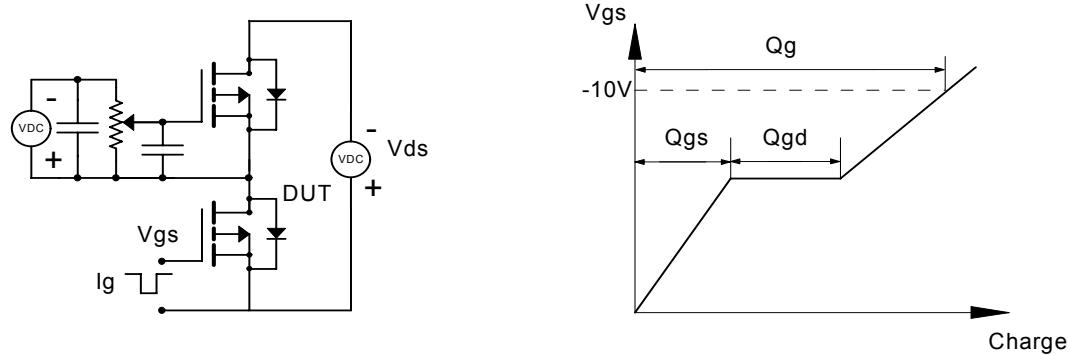

## Resistive Switching Test Circuit &amp; Waveforms

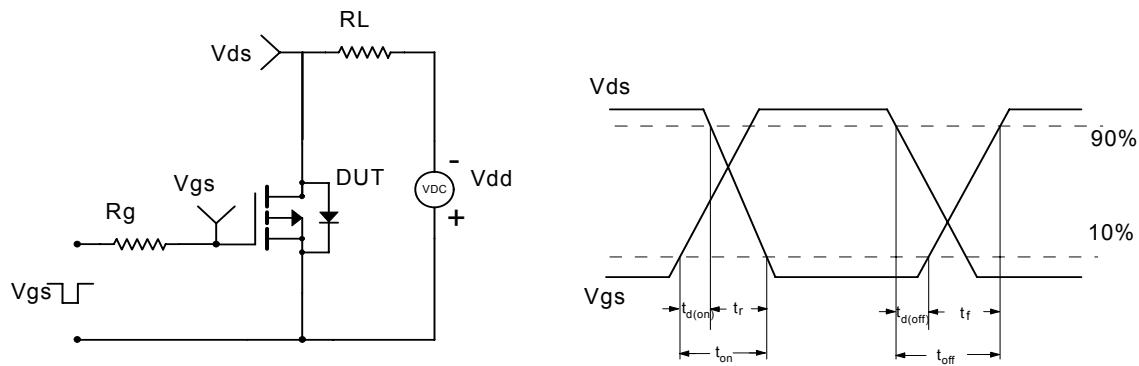

## Diode Recovery Test Circuit &amp; Waveforms

