



**Data sheet | Item number: 857-569**

Power signal conditioner; Current and voltage input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width

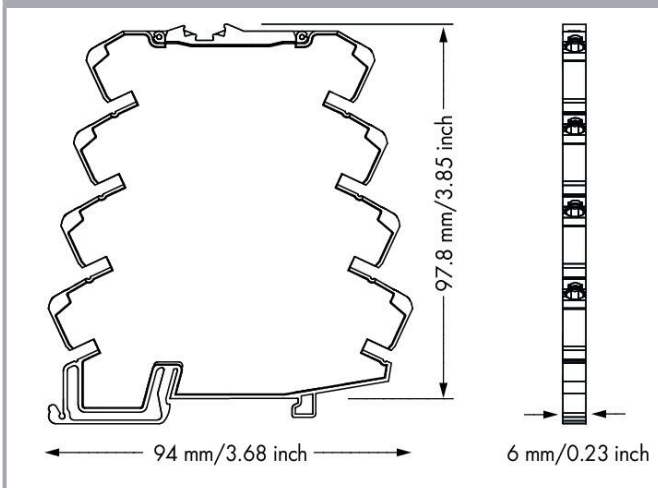

[www.wago.com/857-569](http://www.wago.com/857-569)

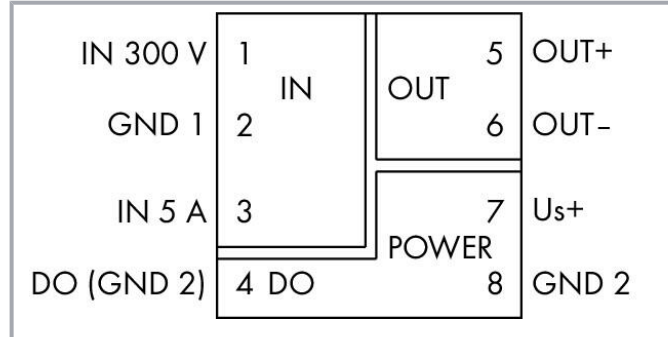

857-569  
DIP Switch Adjustability

• ON  Default

DIP Switch S1		3	4	Filter
1	2	Measured Variable	Not assigned	Off
<ul style="list-style-type: none"> <li>Effective power</li> <li>Apparent power</li> <li>Reactive power</li> <li>Power factor</li> </ul>				<ul style="list-style-type: none"> <li>Active</li> </ul>

DIP Switch S1		5	7	Output Signal Range
<ul style="list-style-type: none"> <li>0...20 mA</li> <li>4...20 mA</li> <li>0...10 V</li> <li>2...10 V</li> <li>0...10 mA</li> <li>2...10 mA</li> <li>0...5 V</li> <li>1...5 V</li> </ul>				

DIP Switch S1		8	9	10	Digit Output DO/Signaling
<ul style="list-style-type: none"> <li>Lower limit of measurement range</li> <li>Lower limit of measurement range</li> <li>Lower limit of measurement range</li> </ul>		Measurement Range Underflow	Measurement Range Overflow	Upper limit of measurement range +2.5 %	DO V <sub>s</sub> + switching
<ul style="list-style-type: none"> <li>Upper limit of measurement range</li> <li>Upper limit of measurement range</li> <li>Upper limit of measurement range</li> </ul>					DO GND switching

\*acc. to NAMUR NE 43

Filter: The filter function allows a low-pass filter to be switched on in order to mask or "smooth out" oscillating measured values (e.g., during trailing edge flows).

Digital Output DO/Signaling: The digital output (DO) signals error messages and can be configured as follows: 24 V → 0 VDC → -24 V.

**Item description**

**Short description:**

WAGO's power measurement module measures both AC/DC voltages and currents, converting the input signal into a standard analog signal at the output.

Measured value processing can be switched between RMS value or arithmetic mean value and between effective, apparent or reactive power, and

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

phase angle.

#### Features:

- Two isolated measurement inputs for both AC/DC voltages and currents
- RMS measurement or arithmetic mean value
- A digital signal output reacts to configured measurement range limits (on/off switching delay and threshold value switch function can be configured with up to two threshold values).
- Switchable filter function
- 3-way electrical isolation with 2.5 kV test voltage

## Data

### Technical data

### Configuration

Configuration options

DIP switch

WAGO Interface Configuration Software

WAGO Interface Configuration App

### Input

Input signal type	Voltage Current
Input signal (voltage)	AC/DC 300 V (IN 1)
Input signal (current)	AC/DC 0 ... 5 A (IN 2)
Measurement frequency	AC 15 ... 70 Hz
Frequency range	15 ... 70 Hz (AC)
Input resistance (current input)	≤ 10 mΩ
Input resistance (voltage input)	≥ 300 kΩ
Input current (max.)	10 A AC/DC (IN 2; permanent)
Input voltage (max.)	600 V (IN 1; permanent)
Response threshold	300 mV (IN 1); 10 mA (IN 2)
Resolution (voltage)	30 mV (IN 1)
Resolution (current)	1 mA (IN 2)

### Output (analog)

Output signal type	Current Voltage
Output signal (voltage)	0 ... 5 V; 1 ... 5 V; 0 ... 10 V; 2 ... 10 V (can be inverted, also bipolar) 0 ... 5 V; 1 ... 5 V; 0 ... 10 V; 2 ... 10 V (can be inverted (also bipolar))
Output signal (current)	0 ... 10 mA; 2 ... 10 mA; 0 ... 20 mA; 4 ... 20 mA (can be inverted, also

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



	bipolar) 0 ... 10 mA; 2 ... 10 mA; 0 ... 20 mA; 4 ... 20 mA (can be inverted (also bipolar))
Load impedance (voltage output)	$\geq 1 \text{ k}\Omega$
Load impedance (current output)	$\leq 600 \Omega$

### Output (digital)

Switching voltage (DO) max.	Applied supply voltage
Continuous current (DO) max.	100 mA (no internal restriction)
Number of switching thresholds (DO)	1 or 2 (adjustable)
Configurable rise/fall delay time (DO)	0 ... 60 s (via software)

### Signal Processing

Measurement method	RMS measurement; Arithmetic mean value
Limit frequency	2 kHz
Software filter (adjustable)	Moving average value (filter level: 30)
Step response (typ.)	100 ms

### Measurement Error

Transmission error (max.)	$\leq 0.5 \%$ (of the full scale value)
Temperature coefficient	$\leq 0.01 \%/K$

### Supply

Power supply type	24 VDC
Nominal supply voltage $U_S$	DC 24 V
Supply voltage range	$\pm 30 \%$
Current consumption at nominal supply voltage	$\leq 46 \text{ mA} (+ I_{DO})$

### Safety and protection

Rated voltage	300 V; 150 V (UL)
Measurement category per EN/UL 61010-2-030	CAT II (input)
Note on insulation parameters	<b>Danger:</b> Configuration via the service interface must only be performed with a voltage-free measurement input! The digital output (DO) is at the potential of the supply.
Protection type	IP20

Subject to changes. Please also observe the further product documentation!

## Test voltage

Test voltage (input/analog output/supply/service interface)	2.5 kVAC; 50 ... 60 Hz; 1 min
---	-------------------------------

## Insulation parameters(UL)

Overvoltage category	II
Pollution degree	2
Insulation type (input/analog output/supply/service interface)	Reinforced insulation (safe isolation)

## Insulation parameters

Overvoltage category	II
Pollution degree	2
Insulation type (input/analog output/supply/service interface)	Double insulation (impedance and basic insulation) Requirement: The GND 1 input is dangerous when active and the measurement is conducted as a low-side measurement!

## Connection data

Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

## Physical data

Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

## Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

## Material Data

Fire load	0.013 MJ
Weight	39.2 g

## Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C (at nominal current)
---------------------------------	-------------------------------------

Subject to changes. Please also observe the further product documentation!



Ambient temperature (storage)	-40 ... +85 °C
Temperature range of connection cable	$\geq (T_{\text{ambient}} + 10 \text{ K})$
Temperature range of connection cable (UL)	80 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

### Standards and specifications

Conformity marking	CE
EMC immunity to interference	EN 61000-6-2; EN 61326-2-3; EN 50121-3-2
EMC emission of interference	EN 61000-6-3; EN 61326-2-3; EN 50121-3-2
Standards/specifications	EN 50121-3-2 EN 61010-1 EN 61373

### Commercial data

eCl@ss 10.0	27-21-01-24
eCl@ss 9.0	27-21-01-24
ETIM 8.0	EC002476
ETIM 7.0	EC002476
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	DE
GTIN	4055143501026
Customs tariff number	85437090300

### Environmental Product Compliance




CAS-No.	1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	0334ed74-ca93-4ebb-9687-7fb41083b84c

Subject to changes. Please also observe the further product documentation!


SCIP notification number (Belgium)	52197f75-6ee4-4832-ba31-18d590a3cfc1
SCIP notification number (Bulgaria)	33ab3002-8078-4165-92e1-c0183f8b20da
SCIP notification number (Czech Republic)	aad42d90-b712-478c-bff1-e9e87a65592d
SCIP notification number (Denmark)	f6f5a36a-e242-49e2-9aa3-037e7aa732c4
SCIP notification number (Finland)	90b8099b-7e3d-487a-9368-3d7c1ccccf173
SCIP notification number (France)	f9b95d5c-28d6-45d8-9a80-bbdd9b41a7b6
SCIP notification number (Germany)	98311d18-05a3-429a-8648-c06160b9eb34
SCIP notification number (Hungary)	41ffffef-697d-497d-b974-99c265608896
SCIP notification number (Italy)	cb3a3c8d-ca04-4627-bd73-565ab7b2f02a
SCIP notification number (Netherlands)	49dd2d9e-c918-4cf5-80c7-bb23a3ba8864
SCIP notification number (Poland)	c4a7f19d-f681-49eb-a9e6-0e311ace9798
SCIP notification number (Romania)	5bf080aa-49b1-4698-b403-928127389211
SCIP notification number (Sweden)	b5c152bb-1fdd-4c12-80a1-d0beccd5021e

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011	EAC RU C-DE.AM02.B.00122/19
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

### Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-













## Optional accessories

### Relay module















Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.







Relay module		
	<b>Item no.: 857-304</b> Relay module; Nominal input voltage: 24 VDC; 1 changeover contact; Limiting continuous current: 6 A; Yellow status indicator; Module width: 6 mm; 2,50 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/857-304">www.wago.com/857-304</a>
Terminal blocks		
Supply module		
	<b>Item no.: 857-979</b> Supply and through module	<a href="http://www.wago.com/857-979">www.wago.com/857-979</a>
Jumpers		
Jumper		
	<b>Item no.: 859-408</b> Jumper; for jumper slot; 8-way; insulated; light gray	<a href="http://www.wago.com/859-408">www.wago.com/859-408</a>
	<b>Item no.: 281-482</b> Jumper; 2-way; insulated; gray	<a href="http://www.wago.com/281-482">www.wago.com/281-482</a>
	<b>Item no.: 859-404/000-005</b> Jumper; for jumper slot; 4-way; insulated; red	<a href="http://www.wago.com/859-404/000-005">www.wago.com/859-404/000-005</a>
	<b>Item no.: 859-404/000-006</b> Jumper; for jumper slot; 4-way; insulated; blue	<a href="http://www.wago.com/859-404/000-006">www.wago.com/859-404/000-006</a>
	<b>Item no.: 859-405/000-005</b> Jumper; for jumper slot; 5-way; insulated; red	<a href="http://www.wago.com/859-405/000-005">www.wago.com/859-405/000-005</a>
	<b>Item no.: 859-405/000-029</b> Jumper; for jumper slot; 5-way; insulated; yellow	<a href="http://www.wago.com/859-405/000-029">www.wago.com/859-405/000-029</a>
	<b>Item no.: 859-405</b> Jumper; for jumper slot; 5-way; insulated; light gray	<a href="http://www.wago.com/859-405">www.wago.com/859-405</a>
	<b>Item no.: 859-404/000-029</b> Jumper; for jumper slot; 4-way; insulated; yellow	<a href="http://www.wago.com/859-404/000-029">www.wago.com/859-404/000-029</a>
	<b>Item no.: 859-406</b> Jumper; for jumper slot; 6-way; insulated; light gray	<a href="http://www.wago.com/859-406">www.wago.com/859-406</a>
	<b>Item no.: 859-405/000-006</b> Jumper; for jumper slot; 5-way; insulated; blue	<a href="http://www.wago.com/859-405/000-006">www.wago.com/859-405/000-006</a>

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 859-406/000-005</b> Jumper; for jumper slot; 6-way; insulated; red	<a href="http://www.wago.com/859-406/000-005">www.wago.com/859-406/000-005</a>
	<b>Item no.: 859-409/000-029</b> Jumper; for jumper slot; 9-way; insulated; yellow	<a href="http://www.wago.com/859-409/000-029">www.wago.com/859-409/000-029</a>
	<b>Item no.: 859-410/000-005</b> Jumper; for jumper slot; 10-way; insulated; red	<a href="http://www.wago.com/859-410/000-005">www.wago.com/859-410/000-005</a>
	<b>Item no.: 859-410/000-029</b> Jumper; for jumper slot; 10-way; insulated; yellow	<a href="http://www.wago.com/859-410/000-029">www.wago.com/859-410/000-029</a>
	<b>Item no.: 859-410</b> Jumper; for jumper slot; 10-way; insulated; light gray	<a href="http://www.wago.com/859-410">www.wago.com/859-410</a>
	<b>Item no.: 859-410/000-006</b> Jumper; for jumper slot; 10-way; insulated; blue	<a href="http://www.wago.com/859-410/000-006">www.wago.com/859-410/000-006</a>
	<b>Item no.: 859-403/000-005</b> Jumper; for jumper slot; 3-way; insulated; red	<a href="http://www.wago.com/859-403/000-005">www.wago.com/859-403/000-005</a>
	<b>Item no.: 859-402/000-029</b> Jumper; for jumper slot; 2-way; insulated; yellow	<a href="http://www.wago.com/859-402/000-029">www.wago.com/859-402/000-029</a>
	<b>Item no.: 859-403/000-029</b> Jumper; for jumper slot; 3-way; insulated; yellow	<a href="http://www.wago.com/859-403/000-029">www.wago.com/859-403/000-029</a>
	<b>Item no.: 859-403/000-006</b> Jumper; for jumper slot; 3-way; insulated; blue	<a href="http://www.wago.com/859-403/000-006">www.wago.com/859-403/000-006</a>
	<b>Item no.: 859-408/000-005</b> Jumper; for jumper slot; 8-way; insulated; red	<a href="http://www.wago.com/859-408/000-005">www.wago.com/859-408/000-005</a>
	<b>Item no.: 859-408/000-029</b> Jumper; for jumper slot; 8-way; insulated; yellow	<a href="http://www.wago.com/859-408/000-029">www.wago.com/859-408/000-029</a>
	<b>Item no.: 859-409</b> Jumper; for jumper slot; 9-way; insulated; light gray	<a href="http://www.wago.com/859-409">www.wago.com/859-409</a>
	<b>Item no.: 859-408/000-006</b> Jumper; for jumper slot; 8-way; insulated; blue	<a href="http://www.wago.com/859-408/000-006">www.wago.com/859-408/000-006</a>

Subject to changes. Please also observe the further product documentation!









	<b>Item no.: 859-403</b> Jumper; for jumper slot; 3-way; insulated; light gray	<a href="http://www.wago.com/859-403">www.wago.com/859-403</a>
	<b>Item no.: 859-409/000-005</b> Jumper; for jumper slot; 9-way; insulated; red	<a href="http://www.wago.com/859-409/000-005">www.wago.com/859-409/000-005</a>
	<b>Item no.: 859-404</b> Jumper; for jumper slot; 4-way; insulated; light gray	<a href="http://www.wago.com/859-404">www.wago.com/859-404</a>
	<b>Item no.: 859-409/000-006</b> Jumper; for jumper slot; 9-way; insulated; blue	<a href="http://www.wago.com/859-409/000-006">www.wago.com/859-409/000-006</a>
	<b>Item no.: 859-402/000-006</b> Jumper; for jumper slot; 2-way; insulated; blue	<a href="http://www.wago.com/859-402/000-006">www.wago.com/859-402/000-006</a>
	<b>Item no.: 859-402</b> Jumper; for jumper slot; 2-way; insulated; light gray	<a href="http://www.wago.com/859-402">www.wago.com/859-402</a>
	<b>Item no.: 859-402/000-005</b> Jumper; for jumper slot; 2-way; insulated; red	<a href="http://www.wago.com/859-402/000-005">www.wago.com/859-402/000-005</a>
	<b>Item no.: 859-406/000-006</b> Jumper; for jumper slot; 6-way; insulated; blue	<a href="http://www.wago.com/859-406/000-006">www.wago.com/859-406/000-006</a>
	<b>Item no.: 859-406/000-029</b> Jumper; for jumper slot; 6-way; insulated; signal yellow	<a href="http://www.wago.com/859-406/000-029">www.wago.com/859-406/000-029</a>
	<b>Item no.: 859-407/000-006</b> Jumper; for jumper slot; 7-way; insulated; blue	<a href="http://www.wago.com/859-407/000-006">www.wago.com/859-407/000-006</a>
	<b>Item no.: 859-407/000-005</b> Jumper; for jumper slot; 7-way; insulated; red	<a href="http://www.wago.com/859-407/000-005">www.wago.com/859-407/000-005</a>
	<b>Item no.: 859-407/000-029</b> Jumper; for jumper slot; 7-way; insulated; yellow	<a href="http://www.wago.com/859-407/000-029">www.wago.com/859-407/000-029</a>
	<b>Item no.: 859-407</b> Jumper; for jumper slot; 7-way; insulated; light gray	<a href="http://www.wago.com/859-407">www.wago.com/859-407</a>
<b>Interface module</b>		
Interface adapters		
	<b>Item no.: 857-980</b>	<a href="http://www.wago.com/857-980">www.wago.com/857-980</a>

Subject to changes. Please also observe the further product documentation!

Interface adapter; 16-pole; analog

## Voltage tap

## Power tap


	<b>Item no.: 855-8001</b> Power tap; with fuse; 2,5 mm <sup>2</sup> (12 AWG) - 6 mm <sup>2</sup> (10 AWG); Phase	<a href="http://www.wago.com/855-8001">www.wago.com/855-8001</a>
	<b>Item no.: 855-8002</b> Power tap; without fuse; 2,5 mm <sup>2</sup> (12 AWG) - 6 mm <sup>2</sup> (10 AWG); N-conductor	<a href="http://www.wago.com/855-8002">www.wago.com/855-8002</a>
	<b>Item no.: 855-8004</b> Power tap; without fuse; 10 mm <sup>2</sup> (8 AWG) - 16 mm <sup>2</sup> (6 AWG); N-conductor	<a href="http://www.wago.com/855-8004">www.wago.com/855-8004</a>
	<b>Item no.: 855-8003</b> Power tap; with fuse; 10 mm <sup>2</sup> (8 AWG) - 16 mm <sup>2</sup> (6 AWG); Phase	<a href="http://www.wago.com/855-8003">www.wago.com/855-8003</a>
	<b>Item no.: 855-8006</b> Power tap; for busbar; with fuse; Mounting screw M6	<a href="http://www.wago.com/855-8006">www.wago.com/855-8006</a>
	<b>Item no.: 855-8008</b> Power tap; for busbar; with fuse; Mounting screw M8	<a href="http://www.wago.com/855-8008">www.wago.com/855-8008</a>
	<b>Item no.: 855-8015</b> Power tap; for busbar; with fuse; Clamping connection	<a href="http://www.wago.com/855-8015">www.wago.com/855-8015</a>

## Communication

## Bluetooth


	<b>Item no.: 750-921</b> Bluetooth® Adapter	<a href="http://www.wago.com/750-921">www.wago.com/750-921</a>
---	--	--

## Communication cable

	<b>Item no.: 750-923</b> Configuration cable; USB connector; Length: 2.5 m	<a href="http://www.wago.com/750-923">www.wago.com/750-923</a>
--	---	--

## Power supplies

## Power supply unit

	<b>Item no.: 787-2852</b> Switched-mode power supply; 1-phase; 24 VDC output voltage; 1 A output current	<a href="http://www.wago.com/787-2852">www.wago.com/787-2852</a>
---	---	--

## Cables and pluggable connectors

## Communication cable

	<b>Item no.: 750-923/000-001</b> Configuration cable; USB connector; Length: 5 m	<a href="http://www.wago.com/750-923/000-001">www.wago.com/750-923/000-001</a>
--	---	--

## Marking accessories

## Marking strip

Subject to changes. Please also observe the further product documentation!



**Item no.: 2009-110**  
 Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

[www.wago.com/2009-110](http://www.wago.com/2009-110)

Marker



**Item no.: 2009-115**  
 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115](http://www.wago.com/2009-115)



**Item no.: 793-501**  
 WMB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/793-501](http://www.wago.com/793-501)



**Item no.: 793-502**  
 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-502](http://www.wago.com/793-502)



**Item no.: 793-503**  
 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-503](http://www.wago.com/793-503)



**Item no.: 793-504**  
 WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-504](http://www.wago.com/793-504)



**Item no.: 793-505**  
 WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-505](http://www.wago.com/793-505)



**Item no.: 793-506**  
 WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-506](http://www.wago.com/793-506)



**Item no.: 793-566**  
 WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-566](http://www.wago.com/793-566)



**Item no.: 793-5501**  
 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/793-5501](http://www.wago.com/793-5501)

Tool

Operating tool



**Item no.: 210-720**  
 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-720](http://www.wago.com/210-720)

Screwless end stop

Mounting accessories



**Item no.: 249-116**  
 Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

[www.wago.com/249-116](http://www.wago.com/249-116)



**Item no.: 249-117**  
 Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

[www.wago.com/249-117](http://www.wago.com/249-117)

Subject to changes. Please also observe the further product documentation!



Item no.: 249-197

Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

[www.wago.com/249-197](http://www.wago.com/249-197)

## Downloads

### Documentation

#### Bid Text

857-569 pdf - Datei	2019 Jul 18	pdf 80.5 kB	Download
857-569 X81 - Datei	2019 Jul 18	xml 8.1 kB	Download
857-569 docx - Datei	2019 Jul 18	docx 20.8 kB	Download

#### Instruction Leaflet

Signal conditioner; power; configurable; with digital output	V 2.0.0 2020 Sep 29	pdf 2.5 MB	Download
--	------------------------	---------------	----------

#### Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

## Engineering-Software

### Configuration and Commissioning Software

WAGO Interface Configuration Software G2 FULL The full setup, in addition to the WAGO Interface Configuration Software G2, includes the installation for the Microsoft .NET Framework.	1.00.10.01 2022 Jan 20	exe 114.9 MB	Download
WAGO Interface Configuration Software G2 SMALL The full setup only includes the WAGO Interface Configuration Software G2.	1.00.10.01 2022 Jan 20	exe 31.0 MB	Download

## CAD/CAE-Data

### CAD data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

2D/3D Models 857-569	<a href="#">URL</a>	<a href="#">Download</a>
<b>CAE data</b>		
WSCAD Universe 857-569	<a href="#">URL</a>	<a href="#">Download</a>
ZUKEN Portal 857-569	<a href="#">URL</a>	<a href="#">Download</a>
EPLAN Data Portal 857-569	<a href="#">URL</a>	<a href="#">Download</a>


## Environmental Product Compliance

### Compliance Search


Environmental Product Compliance 857-569	<a href="#">URL</a>	<a href="#">Download</a>
Power signal conditioner; Current and voltage input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width		

## Installation Notes

### Configuring

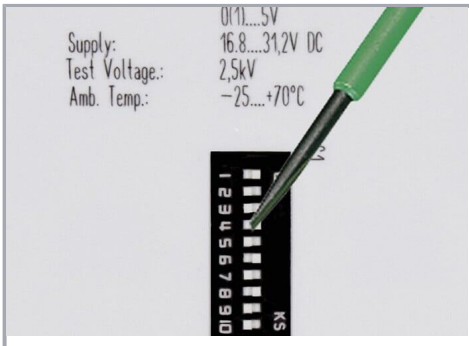


Configuration via DIP switch

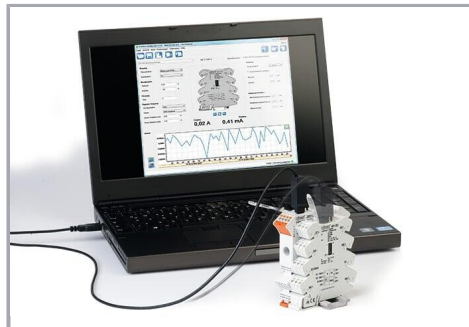


Configuration via WAGO Interface  
Configuration Software

Subject to changes. Please also observe the further product documentation!

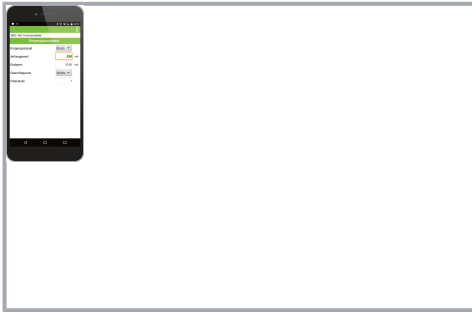

Configuration via WAGO Interface  
Configuration App

### Commoning

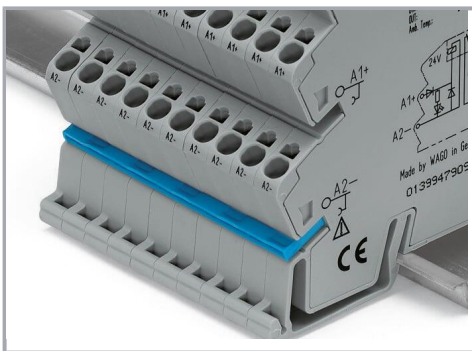

Commoning, not discrete wiring – Same outline allows use of a single in-line, push-in jumper.

Subject to changes. Please also observe the further product documentation!