

160CMQ... SERIES

SCHOTTKY RECTIFIER

160 Amp


Major Ratings and Characteristics

Characteristics	160CMQ...	Units
$I_{F(AV)}$ Rectangular waveform	160	A
V_{RRM} range	35 to 45	V
I_{FSM} @ $t_p = 5 \mu s$ sine	6400	A
V_F @ 80 Apk, $T_J = 125^\circ C$ (per leg)	0.60	V
T_J range	-55 to 150	°C

Description/Features

The 160CMQ isolated, center tap Schottky rectifier module series has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.


- 150° C T_J operation
- Isolated heatsink
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low profile, high current package

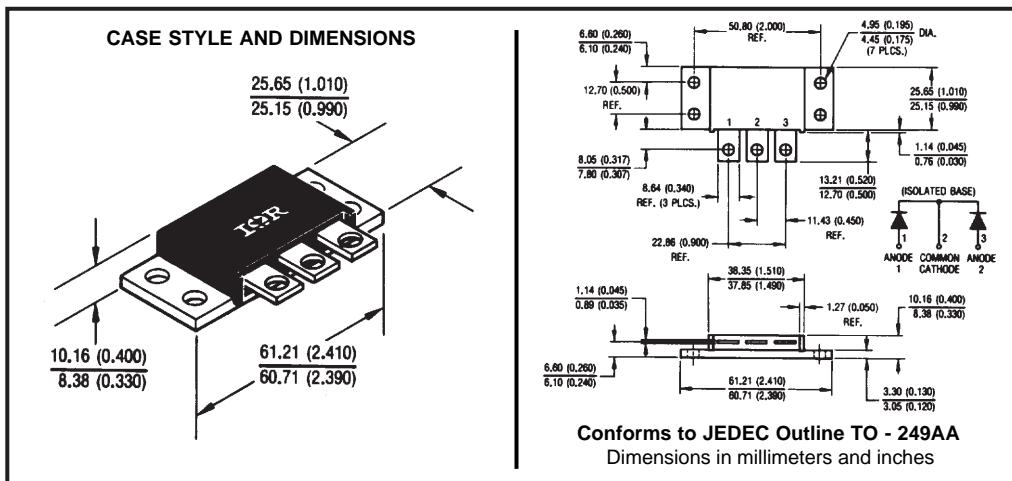

International
IR Rectifier

160CNQ... Series
PD-2.254 rev. A 12/97

Instantaneous Forward Current - I_F (A)

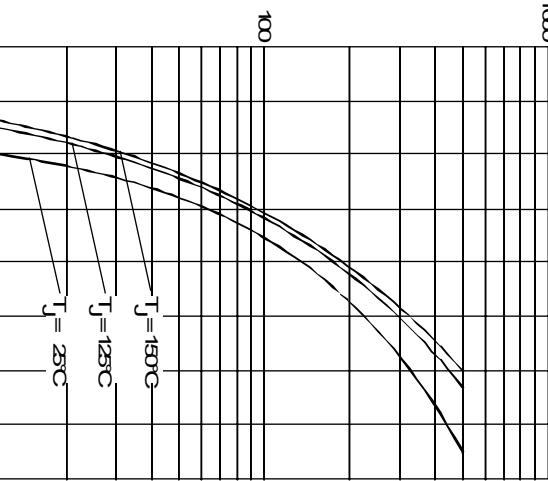

Reverse Current - I_R (mA)

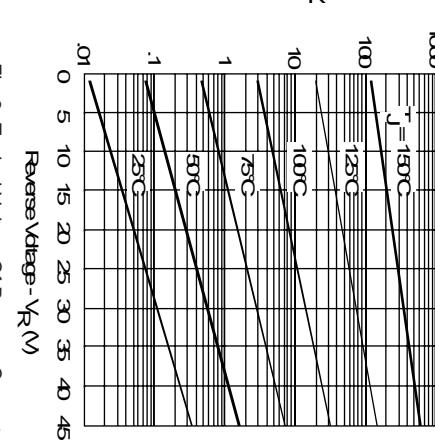


Fig. 2-Typical Values Of Reverse Current
Vs. Reverse Voltage (PerLeg)

Junction Capacitance - C_J (pF)

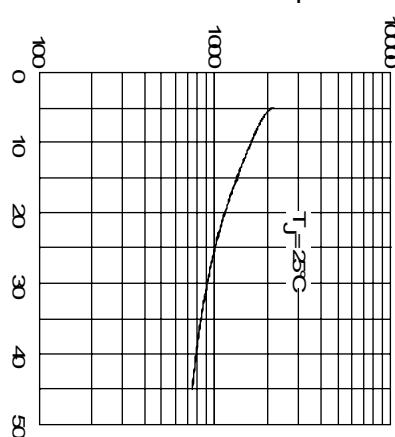


Fig. 3-Typical Junction Capacitance
Vs. Reverse Voltage (PerLeg)

Forward Voltage Drop - V_{FV} (V)

Fig. 1-Max. Forward Voltage Drop Characteristics (PerLeg)

Thermal Impedance - Z_{thJC} (°C/W)

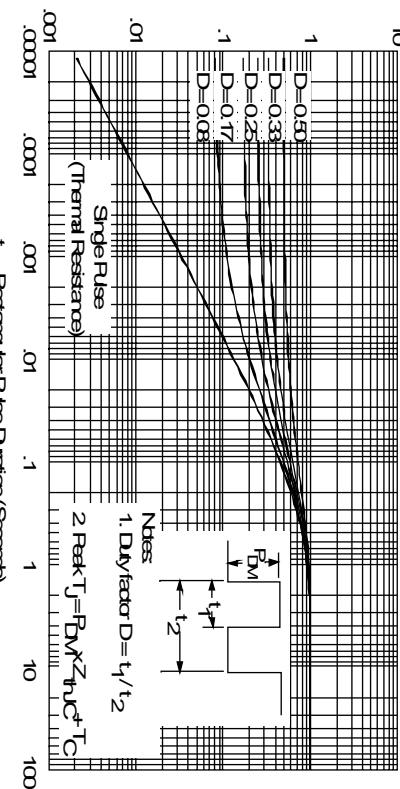


Fig. 4-Max. Thermal Impedance Z_{thJC} Characteristics (PerLeg)

160CMQ... Series
PD-2.254 rev. A 12/97

International
IR Rectifier

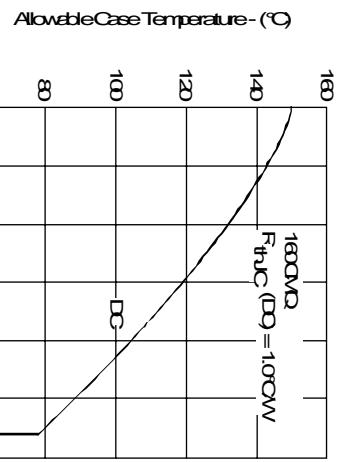


Fig. 5 - Max. Allowable Case Temperature
Vs. Average Forward Current (PerLeg)

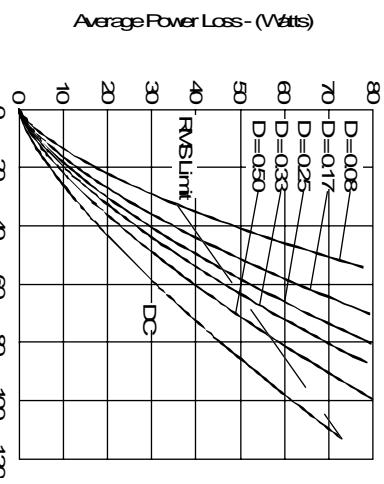


Fig. 6 - Forward Power Loss Characteristics
(PerLeg)

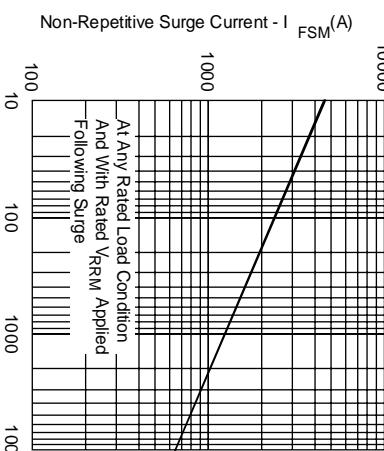


Fig. 7 - Max. Non-Repetitive Surge Current (PerLeg)

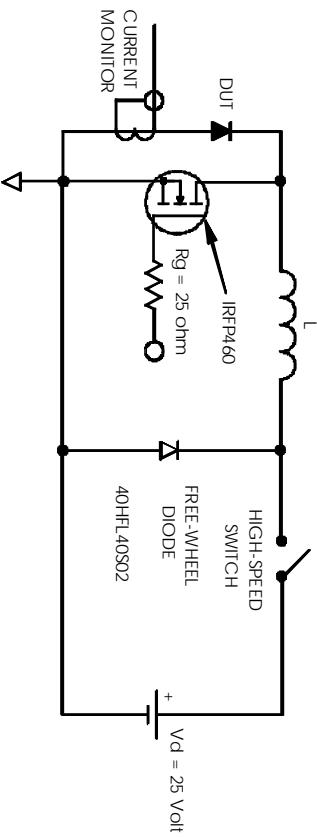


Fig. 8 - Undamped Inductive Test Circuit