

# 2304

### 4.0 Watts - 20 Volts, Class C Microwave 2300 MHz

#### **GENERAL DESCRIPTION**

The 2304 is a COMMON BASE transistor capable of providing 4 Watts Class C, RF output power at 2300 MHz. Gold metalization and diffused ballasting are used to provide high reliability and supreme ruggedness. The transistor uses a fully hermetic High Temperature Solder Sealed package.

#### ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C 10.2 Watts


**Maximum Voltage and Current** 

BVcesCollector to Emitter Voltage45 VoltsBVeboEmitter to Base Voltage3.5 VoltsIcCollector Current0.6 A

**Maximum Temperatures** 

 $\begin{array}{ll} \mbox{Storage Temperature} & -65 \mbox{ to} + 200 \mbox{°C} \\ \mbox{Operating Junction Temperature} & + 200 \mbox{°C} \end{array}$ 

# CASE OUTLINE 55 BT- Style 1



#### ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout Pin Pg η <sub>c</sub> VSWR <sub>1</sub>	Power Out Power Input Power Gain Collector Efficiency Load Mismatch Tolerance	F = 2.3 GHz Vcb = 20 Volts Po = 4 Watts As Above F = 2.3 GHz, Po = 4 W	4.0 8.0	40	0.63	Watt Watt dB %


$\begin{array}{ccc} \textbf{BVebo} & \textbf{Emit} \\ \textbf{Icbo} & \textbf{Collo} \\ \textbf{h}_{FE} & \textbf{Curr} \\ \textbf{Cob} & \textbf{Outp} \end{array}$	ector to Emitter Breakdown tter to Base Breakdown ector to Base Current rent Gain out Capacitance	Ic = 30 mA Ie = 3.0 mA Vcb = 22 Volts Vce = 5 V, Ic = 300 mA F = 1.0 MHz, Vcb = 22 V	45 3.5 10	7.0	1.5	Volts Volts mA  pF °C/W
--	---	--	-----------------	-----	-----	-------------------------

Issue August 1996


GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHZ RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.




#### **POWER OUTPUT VS FREQUENCY**

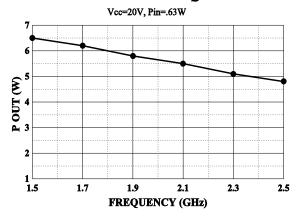

#### EFFICIENCY VS FREQUENCY

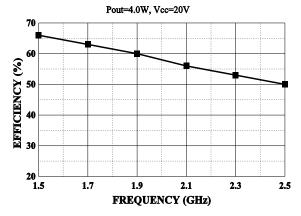


#### TRANSFER CHARACTERISTICS VS FREQUENCY

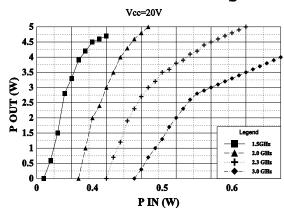

August 1996

## SMITH CHART


#### NORMALIZED IMPEDANCE AND ADMITTANCE COORDINATES

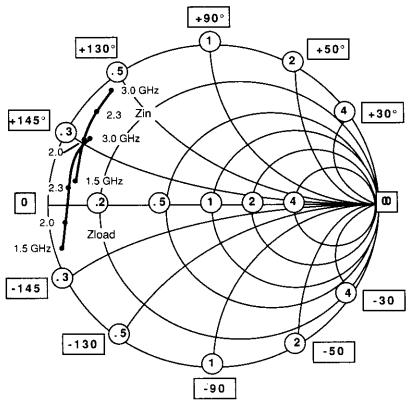

NORMALIZED TO A 50 OHM SYSTEM.


FREQUENCY MHz	R Zi	n JX	FREQUENCY MHz	Zloa R	ad JX
1500	4	5	1500	3.9	16
2000	3.3	15	2000	2.7	3
2300	3.0	18	2300	2.6	-3
3000	2.5	2 2	3000	1.8	-7.5


Y							
REVISIONS							
ZONE	REV	DESCRIPTION	DATE	APPROVED			

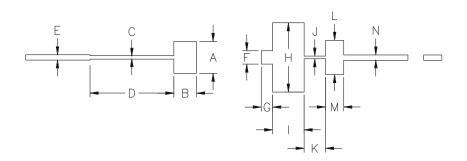

INCHES
.350
.250
.038
.920
.058
.145
.125
.760
.345
.030
.235
.375
.200
.058

2304 TEST CIRCUIT F = 2.3 GHz

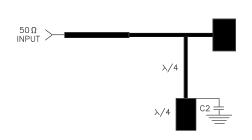

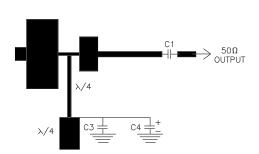

= Microstrip on 0.010" Duroid, Er=2.3 C1,C2 = 100PF ATC "A" C3 = 82PF ATC "B" C4 = 10MFD 35v



cage OPJR2	DWG NO.	2304		REV B
	SCALE	1/1	SHEET	