


203 Series Fuse



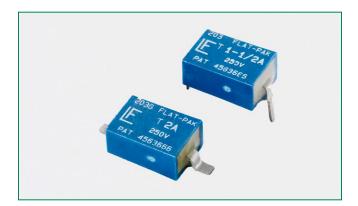

Description

Fast-Acting and Slo-Blo® Fuse versions of the Flat-Pak® Fuse designs are available. Both designs are available in either a gull-wing surface mount package or a DIP configuration for through-hole mounting. These fuse designs feature a 250 VAC rating in a low profile, rectangular package.

Agency Approvals

AGENCY	AGENCY FILE NUMBER	AMPERE RANGE	
71	E10480	0.250A - 5A	
	29862	0.250A - 5A	

Additional Information







Electrical Characteristics for Series


% of Ampere Rating	Opening Time
100%	4 hours, Minimum
200%	1 second, Min; 30 seconds Max.

Electrical Specifications by Item

Ampere		Max	Intonumetina	Nominal Cold	Namaia al Malkia u	Agency Approvals	
Rating (A)	O I I Bating I Bating I		Nominal Melting l²t (A²sec)	<i>71</i> 2	∰ ,		
0.25	.250	250		1.320	0.0126	Х	×
0.50	.500	250	50A@250VAC	0.433	0.112	Х	×
0.75	.750	250		0.158	0.462	х	×
1.00	001.	250		0.0755	0.328	×	×
1.50	01.5	250		0.0399	0.850	Х	×
2.00	002.	250		0.0337	1.70	Х	×
2.50	02.5	250		0.0243	2.87	х	×
3.00	003.	250		0.0197	4.40	Х	×
4.00	004.	250		0.0148	11.66	Х	×
5.00	005.	250		0.0120	14.7	Х	х



Temperature Re-rating Curve

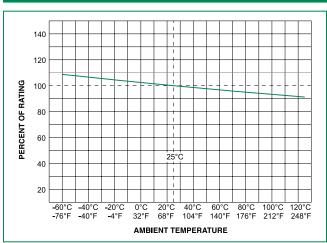


Note:

 Rerating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

Soldering Parameters

Wave Soldering	260°C, 3 seconds max.
Reflow Soldering	215°C, 30 seconds max.


Dimensions

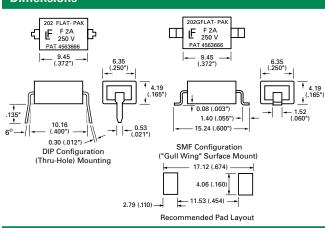

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code
Surface Mount Fuses			
Bulk	_	100	HXG
24mm Tape and Reel	EIA 481 (IEC60286, part 3)	500	URG
Through Hole	Fuses		
Antistatic Magazine	_	100	Н


Average Time Current Curves

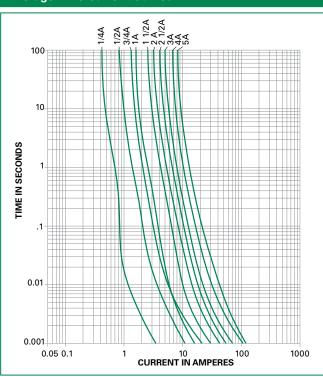

Product Characteristics

Materials	Body: Thermoplastic Terminations: Tin/Lead Plated Copper
Solderability	MIL-STD-202, Method 208.
Cleaning	Board washable in most common solvents.
Operating Temperature	-55°C to 125°C

Part Numbering System

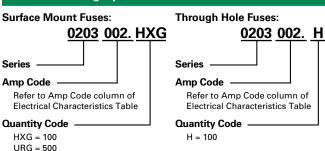

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littlefuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littlefuse.com/disclaimer-electronics.