











Features

- · Constant Power mode output
- · Metal housing design with functional Ground
- · Built-in active PFC function
- Class 2 power unit
- No load / Standby power consumption < 0.5W
- IP67 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer
 3 in 1 dimming function (Dim to off and Isolation design)
- Typical lifetime>50000 hours
- 5 years warranty


Applications

- · LED street lighting
- · LED architectural lighting
- LED bay lighting
- · LED floodlighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

XLG-50 series is a 50W AC/DC LED driver featuring the constant power mode output. XLG-50 operates from $90\sim305$ VAC. Thanks to the high efficiency up to 90%, The entire series is able to operate between -40 $^{\circ}$ C \sim 90 $^{\circ}$ C wide case temperature range with air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications.XLG-50 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.XLG-50 series comply with the latest version of IEC61347/GB7000.1 -2015 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

■ Model Encoding

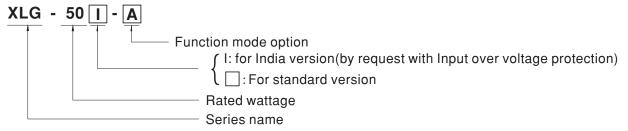

Type	IP Level	Function	Note
Α	IP67	Io adjustable through built in potentiometer.	In Stock
AB	IP67	Io adjustable through built in potentiometer 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock

50W Constant Power Mode LED Driver

SPECIFICATION

RATED CURRENT CONSTANT CURRENT REGION Note.2 RATED POWER CURRENT RIPPLE OPEN CIRCUIT VOLTAGE (max.) CURRENT ADJ. RANGE SETUP, RISE TIME Note.3 VOLTAGE RANGE Note.4 FREQUENCY RANGE	1A 22 ~54V 100VAC ~ 305VAC 50W 5.0% max. @rated current 57V 0.53 ~ 2.1A 500ms, 100ms/115VAC, 230VAC 90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERIST				
RATED POWER CURRENT RIPPLE OPEN CIRCUIT VOLTAGE (max.) CURRENT ADJ. RANGE SETUP, RISE TIME Note.3 VOLTAGE RANGE Note.4	100VAC ~ 305VAC 50W 5.0% max. @rated current 57V 0.53 ~ 2.1A 500ms, 100ms/115VAC, 230VAC 90 ~ 305VAC 127 ~ 431VDC				
CURRENT RIPPLE OPEN CIRCUIT VOLTAGE (max.) CURRENT ADJ. RANGE SETUP, RISE TIME Note.3 VOLTAGE RANGE Note.4	50W 5.0% max. @rated current 57V 0.53 ~ 2.1A 500ms, 100ms/115VAC, 230VAC 90 ~ 305VAC 127 ~ 431VDC				
CURRENT RIPPLE OPEN CIRCUIT VOLTAGE (max.) CURRENT ADJ. RANGE SETUP, RISE TIME Note.3 VOLTAGE RANGE Note.4	5.0% max. @rated current 57V 0.53 ~ 2.1A 500ms, 100ms/115VAC, 230VAC 90 ~ 305VAC 127 ~ 431VDC				
OPEN CIRCUIT VOLTAGE (max.) CURRENT ADJ. RANGE SETUP, RISE TIME Note.3 VOLTAGE RANGE Note.4	57V 0.53 ~ 2.1A 500ms, 100ms/115VAC, 230VAC 90 ~ 305VAC 127 ~ 431VDC				
CURRENT ADJ. RANGE SETUP, RISE TIME Note.3 VOLTAGE RANGE Note.4	0.53 ~ 2.1A 500ms, 100ms/115VAC, 230VAC 90 ~ 305VAC 127 ~ 431VDC				
SETUP, RISE TIME Note.3 VOLTAGE RANGE Note.4	500ms, 100ms/115VAC, 230VAC 90 ~ 305VAC 127 ~ 431VDC				
VOLTAGE RANGE Note.4	90 ~ 305VAC 127 ~ 431VDC				
	(Please refer to "STATIC CHARACTERIST				
FREQUENCY RANGE	(Please refer to "STATIC CHARACTERISTIC" section)				
	47 ~ 63Hz				
POWER FACTOR	$\label{eq:pf} \begin{split} PF &\geq 0.97/115 VAC, PF \geq 0.95/230 VAC, PF \geq 0.92/277 VAC \\ & (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) \end{split}$				
TOTAL HARMONIC DISTORTION	THD<10%(@load≧50%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)				
EFFICIENCY (Typ.) Note.10	FICIENCY (Typ.) Note.10 90%				
AC CURRENT	0.57A / 115VAC				
INRUSH CURRENT(Typ.)	COLD START 50A(twidth=350μs measured at 50% lpeak) at 230VAC; Per NEMA 410				
MAX. No. of PSUs on 16A CIRCUIT BREAKER	5 units (circuit breaker of type B) / 8 units (circuit breaker of type C) at 230VAC				
LEAKAGE CURRENT	<0.75mA/277VAC				
NO LOAD / STANDBY POWER CONSUMPTION	No load power consumption <0.5W for A, <0.75W for I series Standby power consumption <0.5W for AB-Type(Dimming OFF)				
	Hiccup mode, recovers automatically after fault condition is removed				
OVER TEMP ENATORE	320 ~ 370VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is remov				
INPUT OVER VOLTAGE Note.8					
SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC AS/NZS IEC BS EN/EN61347-1, AS/NZS BS EN/EN61347-2-13 independent, BS EN/EN62384;IP67; GB19510.1, GB19510.14, EAC TP TC 004,J61347-1(H29), J61347-2-13(H29), KC61347-1, KC61347-2-13,IS15885(Part2/Sec13)(for XLG-50I type only); NOM-058-SCFI-2017 approved				
WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.5KVAC				
ISOLATION RESISTANCE					
	Parameter	Standard	Test Level/Note		
	Conducted	BS EN/EN55015(CISPR15) ,GB/T17743			
EMC EMISSION	Radiated	7.			
LING LINIOGICIA			Class C @load≥50%		
		,			
		DO LINCHOTOGO U-U			
		Standard	Test Level/Note		
			Level 3, 8KV air ; Level 2, 4KV contact		
			Level 3		
FMC IMMUNITY			Level 3		
Emo immonti i			4KV/Line-Line 6KV/Line-Earth		
			Level 3		
			Level 4		
	Voltage Dips and Interruptions	BS EN/EN61000-4-8 BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods,		
MTRE	1252 69 K hrs min, Telegratia SP-332 (Pollo	ore) 394 57Khrs min MII_HDRK-217E (25°C)	>95% interruptions 250 periods		
	,	016) 534.57KIIIS IIIIII. MIL-NUDK-217F (25 ()			
	, ,	0.42Kg:24pcs/11Kg/0.68CUET for AP type			
A II N C L N F C S C III V N V S T V S V II	AC CURRENT NRUSH CURRENT(Typ.) MAX. No. of PSUS on 16A CIRCUIT BREAKER LEAKAGE CURRENT NO LOAD / STANDBY POWER CONSUMPTION DVER POWER SHORT CIRCUIT DVER TEMPERATURE NPUT OVER VOLTAGE Note.8 WORKING TEMP. WORKING HUMIDITY STORAGE TEMP. TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS Note.8 WITHSTAND VOLTAGE SOLATION RESISTANCE EMC EMISSION EMC IMMUNITY	### STORMS COURS TEMP ### STORMS COURS TEMP ### STANDARDS Note.8 ### STANDARDS Note.8	### AC CURRENT ### AC		

NOTE

- 2. Please refer to "DRIVING METHODS OF LED MODULE".
- 2. Please feller to DRIVING METHOUS OF LED MODULE.

 3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.

 4. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 5. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

 6. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 75°C or less.

- 7. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com
 8. Input over voltage only for XLG-50 I series and I series without UL/CSA certificate.
 9. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 10. Only for XLG-50-A


- Only for XLG-30-A
 Products sourced from the Americas regions may not have the CCC/PSE/BIS/KC logo. Please contact your MEAN WELL sales for more information.
 For any application note and IP water proof function installation caution, please refer our user manual before using.
 https://www.meanwell.com/Upload/PDF/LED_EN.pdf

 Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
 To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the mains.
- 15. If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details.
- x Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




■ Block Diagram



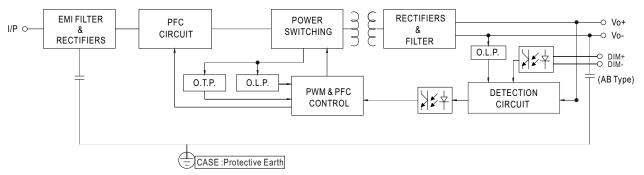

■ DRIVING METHODS OF LED MODULE

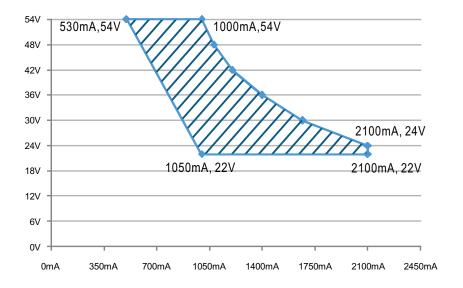

Recommend Performance Region




■ DIMMING OPERATION




$\frac{1}{2}$ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)

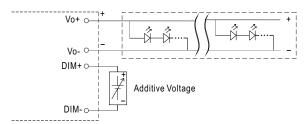


"DO NOT connect "DIM- to Vo-"

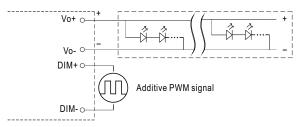



"DO NOT connect "DIM- to Vo-"

Applying additive resistance:

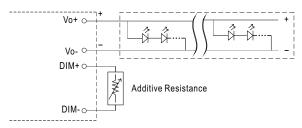

"DO NOT connect "DIM- to Vo-"






100%
80%
70%
60%
30%
20%
Short 10KIN 20KIN 30KIN 40KIN 50KIN 60KIN 70KIN 80KIN 100KIN 100KIN 0Miniming operation)
Dimming input: Additive resistance

Note : 1. Min. dimming level is about 8% and the output current is not defined when 0% I out <8%.

2. The output current could drop down to 0% when dimming input is about $0k\Omega$ or 0Vdc, or 10V PWM signal with 0% duty cycle.

LOAD

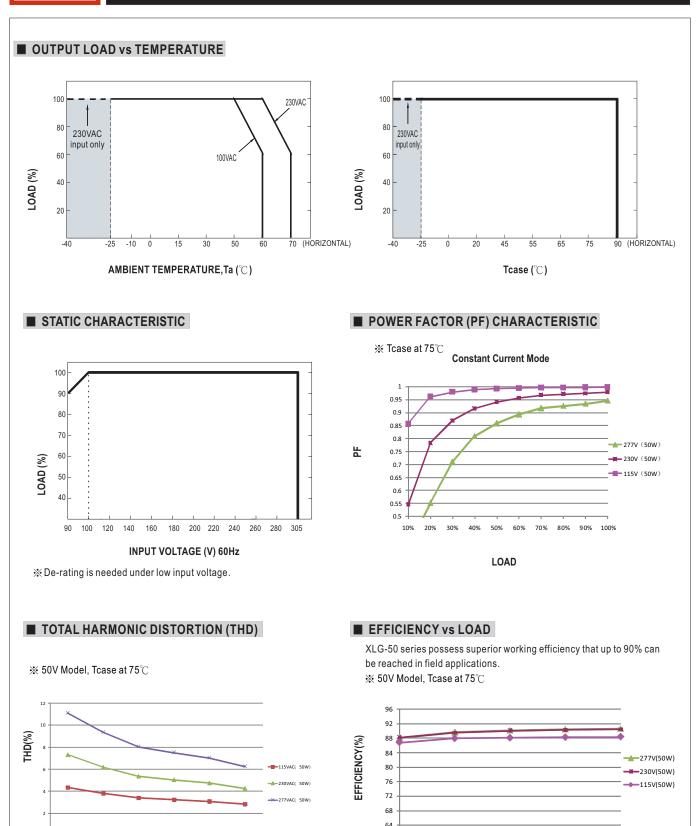

60


60%

70%

LOAD


■ LIFE TIME

TIME(Kh

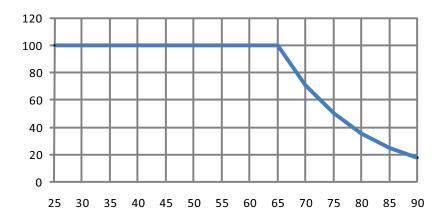


Tcase ($^{\circ}$ C)




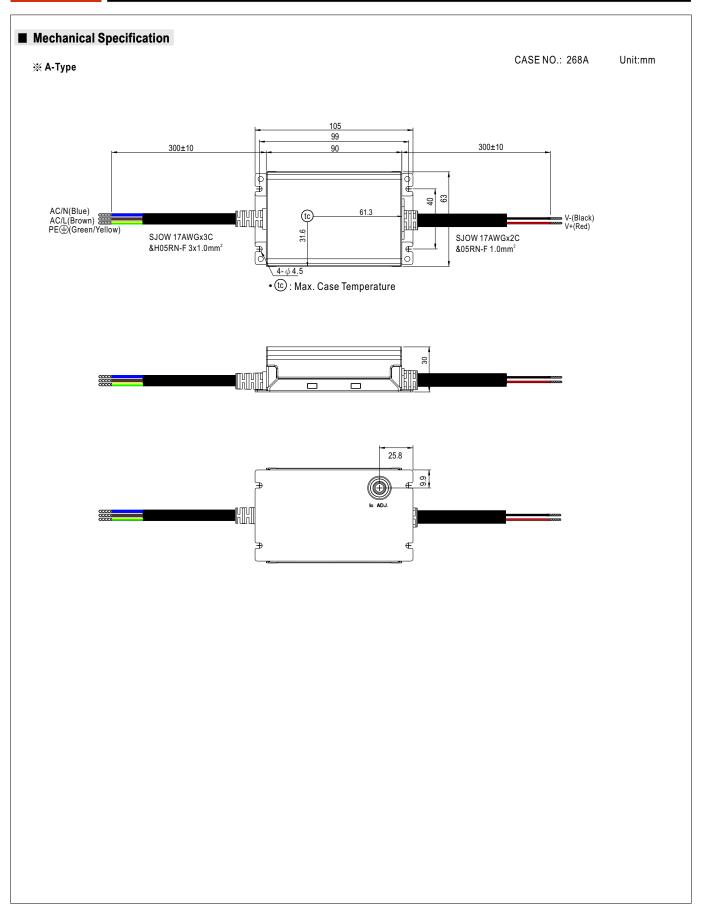



※ AB-Type

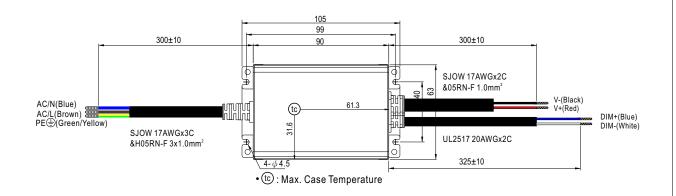

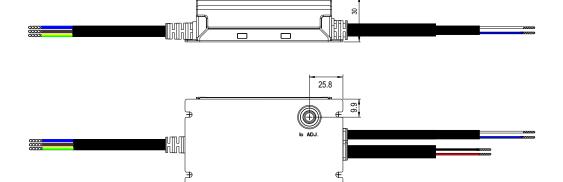

■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html