



SP8T Ramses SMA 18GHz Latching Self-cut-off Auto-reset 28Vdc
Positive common Diodes Pins Terminals

PAGE 1/2 ISSUE 26-07-21 SERIE : SPnT PART NUMBER : R573483810

RF CHARACTERISTICS

Number of ways : 8

Frequency range : 0 - 18 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 3	3 - 8	8 - 12.4	12.4 - 16	16 - 18
VSWR max	1.20	1.30	1.40	1.50	1.60
Insertion loss max	0.20 dB	0.30 dB	0.40 dB	0.55 dB	0.60 dB
Isolation min	80 dB	70 dB	60 dB	60 dB	60 dB
Average power (*)	240 W	150 W	120 W	110 W	100 W

ELECTRICAL CHARACTERISTICS

Actuator : LATCHING
Nominal current ** : 375 mA

Actuator voltage (Vcc) : 28V (24 to 30V) / POSITIVE COMMON Terminals : solder pins (250°C max. / 30 sec.)

Self cut-off time : 40 ms < CT < 120 ms

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012 Life : 2 million cycles per position

Switching Time*** : < 50 ms

Construction : Splashproof

Weight : < 280 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C
Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

** At 25° C ±10%)

(*** Nominal voltage; 25° C)









SP8T Ramses SMA 18GHz Latching Self-cut-off Auto-reset 28Vdc
Positive common Diodes Pins Terminals


PAGE 2/2 ISSUE 26-07-21 SERIE : SPnT PART NUMBER : R573483810

DRAWING

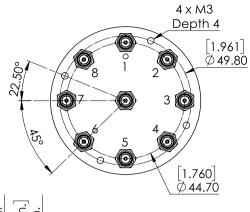


Voltage	RF Continuity	
+C -1	$IN \leftrightarrow 1$	
+C -2	$IN \leftrightarrow 2$	
+C -3	$IN \leftrightarrow 3$	
+C -4	$IN \leftrightarrow 4$	
+C -5	IN ↔ 5	
+C -6	$IN \leftrightarrow 6$	
+C -7	$IN \leftrightarrow 7$	
+C -8	$IN \leftrightarrow 8$	

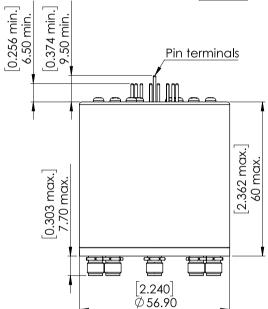

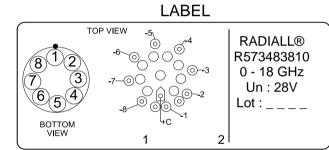

General tolerances: ±0,5 mm [0,02 in]

SCHEMATIC DIAGRAM

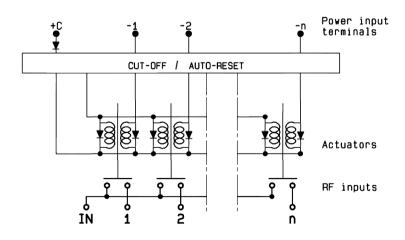

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.