


## SmartOnline Double-Conversion UPS - 2U, USB, DB9, 230V, 3kVA, 2.5kW, On-Line

MODEL NUMBER: **SUINT3000RTXL2U**

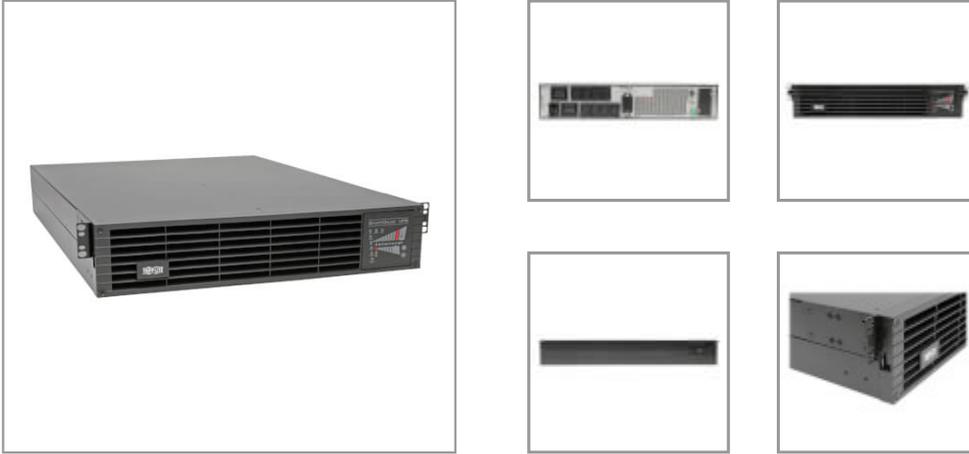

3kVA UPS converts raw incoming AC power to DC, then re-converts DC to fulltime sine wave 230V AC output with zero transfer time.

### Features

**Double-Conversion UPS Protects Equipment against Damage, Downtime and Data Loss** This 230V 2U UPS system protects connected equipment against damage, downtime and data loss due to power outages, voltage fluctuations and transient surges. Featuring a 2500W capacity, high 0.8 power factor, 420 joules of surge suppression, true on-line operation with pure sine wave output and zero transfer time to battery, the SmartOnline® SUINT3000RTXL2U double-conversion UPS provides the highest level of battery backup and AC power protection for critical network closet, computer room and data center equipment.

**Individually Controllable Load Banks Let You Access and Control Outlets** Eight C13 outlets are even split into two switchable load banks, each allowing you to reboot connected equipment or shed loads remotely. In addition to the C13 outlets, this UPS provides two C19 outlets for powering critical components.

**Reliable, Expandable Battery Backup Keeps You Operational Through Power Outages** UPS battery backup keeps connected equipment operational through short power failures, and provides time to save data and perform an orderly system shutdown in case of a prolonged blackout. The field-replaceable, hot-swappable internal battery provides 15 minutes of support at half load and six minutes at full load. During normal operation, incoming utility power keeps the battery fully charged so backup power will be available when needed. For mission-critical applications demanding continuous uptime, the 3kVA UPS can provide expandable runtime with optional external battery packs, such as Tripp Lite's BP72V15-2U (sold separately).

**Easily Hot-Swappable with No Expensive Service Calls or Downtime Needed** Tripp Lite's optional PDUBHV20 bypass PDU (sold separately) enables hot-swappable UPS replacement with no disruption of power to connected equipment. When making repairs or replacing a battery, no lengthy service calls or downtime are necessary.

**Intuitive Front-Panel Interface for Convenient UPS Operation and Monitoring** Front-panel LEDs provide information on load and battery levels, operating mode, fault status and other critical data at a glance. The LED panel rotates for comfortable viewing in rack-mount or tower configuration.

**Advanced Communications Ports** This USB UPS system has USB and DB9 ports (cables are included) that enable data-saving unattended shutdown of connected systems when used with Tripp Lite's free downloadable PowerAlert® software. Capabilities include detailed monitoring of load levels, self-test data and utility power conditions.

**Versatile Installation Options** Hardware is included for mounting the UPS system in 2U of space in an EIA-standard 19-inch 4-post rack with a depth of only 66 centimeters (26 inches). Use the optional 2POSTRMKITWM (sold separately) for 2-post rack mounting or the optional 2-9USTAND (sold separately) for mounting in an upright tower position. The C20 power inlet accepts a variety of user-supplied input cords.

### Highlights

- Zero transfer time between AC power and battery for uninterrupted operation
- 8 C13 outlets in 2 switchable load banks + 2 C19 outlets power critical equipment
- Field-replaceable internal batteries are hot-swappable for convenient replacement
- Optional external batteries provide additional runtime for essential applications
- Front-panel status LEDs indicate detailed load and battery metering at a glance
- To use the Auto Probe feature, this product requires a WEBCARDLX network interface (sold separately) running LX firmware update 15.5.2 or later

### Applications

- Deliver perfectly regulated sine wave output to mission-critical equipment
- Protect connected components from dangerous surges, spikes and line noise
- Keep equipment operational through short power failures
- Allow time to save data and safely shut down components in case of a prolonged blackout

### Package Includes

- SUINT3000RTXL2U SmartOnline Double-Conversion UPS



- C19 to C20 power cable, 5 ft.
- USB cable
- DB9 cable
- EPO cable
- Rack-mounting hardware
- Owner's manual

## Specifications

OVERVIEW	
UPC Code	037332198495
UPS Type	On-Line
OUTPUT	
Output Volt Amp Capacity (VA)	3000
Output kVA Capacity (kVA)	3
Output Watt Capacity (Watts)	2500
Output kW Capacity (kW)	2.5
Power Factor	0.83
Crest Factor	3:1
Nominal Voltage Details	230V default
Frequency Compatibility	50 / 60 Hz
Frequency Compatibility Details	Output frequency matches input nominal on startup, defaults to 50 Hz on cold-start
Output Voltage Regulation (Line Mode)	+/- 2%
Output Voltage Regulation (Economy Line Mode)	+/-10%
Output Voltage Regulation (Battery Mode)	+/- 2%
Included Output Power Cables	Includes 2 C13 to C14 and 1 C19 to C20 power cables
Load Management Receptacles	Two switchable 4 C13 outlet load banks
Hot-Swap PDU options	PDUBHV20 (2U / 6 C13, 2 C19 outlets)
Output AC Waveform (AC Mode)	Sine wave
Output AC Waveform (Battery Mode)	Pure Sine wave
Output Capacity Details	OVERLOAD CAPACITY: Supports inverter operation up to 105% load continuously, 125% load for 3 minutes, 150% for 30 seconds and >150% for 0.5 seconds before switching to BYPASS (when bypass input voltage and frequency are WITHIN bypass limits of $\pm 10\%$ and $\pm 5\text{Hz}$ ) or SHUTDOWN (when bypass input voltage and frequency are OUTSIDE bypass limits of $\pm 10\%$ and $\pm 5\text{Hz}$ )



Nominal Output Voltage(s) Supported	200V; 220V; 230V; 240V
Output Receptacles	(8) C13; (2) C19
Individually Controllable Load Banks	Yes
<b>INPUT</b>	
Rated input current (Maximum Load)	15A
Nominal Input Voltage(s) Supported	230V AC
Nominal Input Voltage Description	230V factory configuration
UPS Input Connection Type	C20 inlet
UPS Input Cord Length (ft.)	5
UPS Input Cord Length (m)	1.5
Input Phase	Single-Phase
<b>BATTERY</b>	
Full Load Runtime (min.)	6 min. (2500w)
Half Load Runtime (min.)	15 min. (1250w)
Expandable Battery Runtime	Supports extended runtime with optional external battery packs
External Battery Pack Compatibility	&nbsp;<a class="productLink" href="//www.tripplite.com/External-72V-2U-RackTower-Battery-Pack-for-Select-Tripp-Lite-UPS-Systems-BP72V15-2U~BP72V15-2U">BP72V15-2U</a>&nbsp;&nbsp;&nbsp;(limit 1);&nbsp;&nbsp;<a class="productLink" href="//www.tripplite.com/External-72V-3U-Rack-Tower-Battery-Pack-Select-Tripp-Lite-UPS-systems-BP72V28RT-3U~BP72V28RT-3U">BP72V28RT-3U</a>&nbsp;&nbsp;&nbsp;(multi-pack compatible);&nbsp;&nbsp;<a class="productLink" href="//www.tripplite.com/External-72V-2U-Rack-Tower-Battery-Pack-for-Tripp-Lite-UPS-Systems-BP72V18-2US~BP72V18-2US">BP72V18-2US</a>&nbsp;&nbsp;&nbsp;(multi-pack compatible)
DC System Voltage (VDC)	72
Battery Recharge Rate (Included Batteries)	Less than 4.8 hours from 10% to 90% (typical, full load discharge)
Internal UPS Replacement Battery Cartridge	See RBC selector
Battery Access	Front panel battery access door
Battery Replacement Description	Hot-swappable, replaceable batteries
Expandable Runtime	Yes
<b>VOLTAGE REGULATION</b>	
Voltage Regulation Description	Online, double-conversion power conditioning
Overvoltage Correction	2% output voltage regulation during overvoltages to 288
Undervoltage Correction	2% output voltage regulation during undervoltages to 160V (70-100% load) / 130V (30-70% load) / 100V (Under 30% load)
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Switches	2 Switches control off/on power status and alarm-cancel/self-test operation
Alarm Cancel Operation	Power-fail alarm can be silenced using alarm-cancel switch





UPS Power Module Dimensions (hwd, cm)	8.79 x 43.79 x 61.60
UPS Power Module Dimensions (hwd, in.)	3.46 x 17.24 x 24.25
UPS Power Module Weight (kg)	31.17
UPS Power Module Weight (lbs.)	68.72
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	+32 to +104 degrees Fahrenheit / 0 to +40 degrees Celsius.
Storage Temperature Range	+5 to +122 degrees Fahrenheit / -15 to +50 degrees Celsius.
Relative Humidity	5 to 95%, non-condensing
AC Mode BTU / Hr. (Full Load)	742
AC Mode Efficiency Rating (100% Load)	92%
<b>COMMUNICATIONS</b>	
Communications Interface	USB (HID enabled); DB9 Serial; Contact closure; EPO (emergency power off); Slot for SNMP/Web interface
Network Management Cards	&nbsp;<a class="productLink" href="//www.tripplite.com/Web-Management-Accessory-Card-WEBCARDLX">WEBCARDLX</a>&nbsp;
Network Monitoring Port Description	Supports detailed monitoring of UPS and site power conditions; DB9 port supports RS232 and contact closure communications
PowerAlert Software	For local monitoring via the UPS's built-in communication ports, download PowerAlert Local software at <a href="http://www.tripplite.com/poweralert">http://www.tripplite.com/poweralert</a>
Communications Cable	USB and DB9 cabling included
WatchDog Compatibility	Supports Watchdog application, OS and hard-reboot restart options for remote applications
<b>LINE / BATTERY TRANSFER</b>	
Transfer Time	No transfer time (0 ms.) in online, double-conversion mode
Low Voltage Transfer to Battery Power (Setpoint)	160V (70-100% load), 130V (30-70% load), 100V (less than 33% load)
High Voltage Transfer to Battery Power (Setpoint)	288V
<b>SPECIAL FEATURES</b>	
Cold Start (Startup in Battery Mode During a Power Failure)	Cold-start operation supported
High Availability UPS Features	Automatic inverter bypass; Hot swappable batteries
Green Energy-Saving Features	High efficiency economy mode operation; Individually controllable load banks
<b>CERTIFICATIONS</b>	
UPS Certifications	CE
UPS Certification Details	Agency standard tested: IEC62040-1:2008+A1; EMI approvals: EN62040-2:2006



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2019 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>