

SP4T Absorptive Switch

DC - 57 GHz



MASW-011154

Rev. V3

Features

- Ultra Wideband: 9 kHz to 57 GHz
- Insertion Loss:
 - 2.0 dB @ 18 GHz
 - 2.8 dB @ 40 GHz
 - 4.0 dB @ 57 GHz
- Isolation:
 - 46 dB @ 18 GHz
 - 41 dB @ 40 GHz
 - 39 dB @ 57 GHz
- Input P1dB: 28.5 dBm
- Input IP3: 51 dBm
- Return Loss at Each RF Port: 16 dB
- Power Handling including Hot Switching: 26 dBm
- No Low Frequency Spurious
- Compatible with 1.8, 2.5, and 3.3 V CMOS Logic
- 3 mm, 22 pin Laminate Package
- RoHS* Compliant

Applications

- Test & Measurement
- ISM, Multi Market


Description

The MASW-011154 is an absorptive, ultra wideband single pole four throw (SP4T) switch with 4.0 dB of insertion loss at 57 GHz. The RF output ports are terminated in 50 ohms in the isolated paths. The power handling capability is 26 dBm. The input and output return losses in the thru path are typically 16 dB. The logic levels are compatible with standard 1.8, 2.5, or 3.3 V CMOS. Required bias supplies are +3.3 V and -3.3 V.

The MASW-011154 is designed for wideband applications such as Test and Measurement, Aerospace and Defense, Cellular infrastructure (5G millimeter-wave), military radios, radars, microwave radios and very small aperture terminals (VSATs).

The MASW-011154 is manufactured on a Silicon-on-Insulator process. The 3 mm laminate package is lead free and RoHS compliant.

Functional Schematic

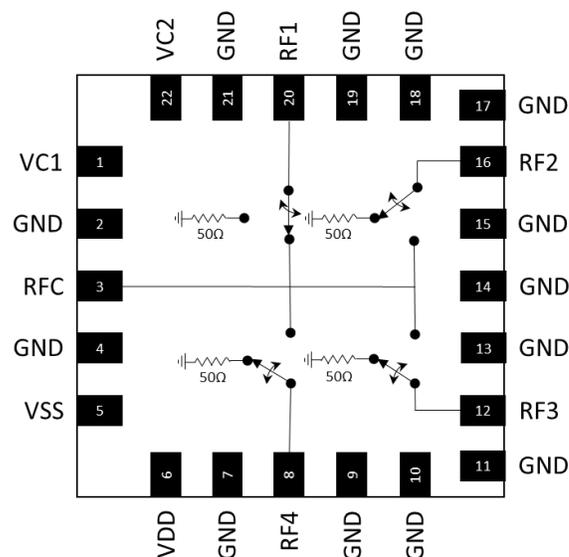

Pin Configuration¹

| Pin # | Pin Name | Description |
|---------------------------|------------------|------------------------|
| 1 | VC1 | Control Voltage 1 |
| 2,4,7,9-11,13-15,17-19,21 | GND | Ground |
| 3 | RFC ² | Common RF Input/Output |
| 5 | VSS | -3.3 V |
| 6 | VDD | +3.3 V |
| 8 | RF4 ² | RF Input/Output 4 |
| 12 | RF3 ² | RF Input/Output 3 |
| 16 | RF2 ² | RF Input/Output 2 |
| 20 | RF1 ² | RF Input/Output 1 |
| 22 | VC2 | Control Voltage 2 |

1. The exposed pad centered on the package bottom must be connected to RF, dc, and thermal ground.
2. RF ports are dc-coupled to GND. There are no internal dc blocking capacitors.

Ordering Information^{3,4}

| Part Number | Package |
|--------------------|----------------|
| MASW-011154-TR0500 | 500 piece reel |
| MASW-011154-SB1 | Sample Board |

3. Reference Application Note M513 for reel size information.
4. All sample boards include 3 loose parts.

¹ * Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

SP4T Absorptive Switch

DC - 57 GHz



MASW-011154

Rev. V3

Electrical Specifications⁵:

$V_{DD} = +3.3\text{ V}$, $V_{SS} = -3.3\text{ V}$, $V_{C1} / V_{C2} = 0\text{ V or } 1.8\text{ V}$, $T_{PADDLE} = 25^{\circ}\text{C}$, $Z_0 = 50\ \Omega$

| Parameter | Test Conditions | Units | Min. | Typ. | Max. |
|--|--|---------------|-------|-------|-------|
| Insertion Loss | DC to 18 GHz | dB | — | 1.6 | — |
| | 18 GHz | | | 2.0 | 2.6 |
| | 30 GHz | | | 2.2 | 3.0 |
| | 44 GHz | | | 2.8 | 4.4 |
| | 57 GHz | | | 4.0 | — |
| Isolation, Between RF1 / RF2 / RF3 / RF4 (Worst Path) | DC to 18 GHz | dB | — | 49 | — |
| | 18 GHz | | | 46 | |
| | 30 GHz | | | 43 | |
| | 44 GHz | | | 41 | |
| | 57 GHz | | | 39 | |
| Isolation, RFC to RF1 / RF2 / RF3 / RF4 (Worst Path) | DC to 18 GHz | dB | — | 52 | — |
| | 18 GHz | | 42 | 47 | |
| | 30 GHz | | 38 | 47 | |
| | 44 GHz | | — | 41 | |
| | 57 GHz | | — | 39 | |
| RFC Return Loss | DC - 57 GHz | dB | — | 16 | — |
| RF1/RF2/RF3/RF4 Return Loss, Thru Port | DC - 57 GHz | dB | — | 16 | — |
| RF1/RF2 Return Loss, Isolated Port | DC - 67 GHz | dB | — | 16 | — |
| Input P0.1dB | 10 MHz - 57 GHz | dBm | — | 27.5 | — |
| Input P1dB | 10 MHz - 57 GHz | dBm | — | 28.5 | — |
| Input IP3 | Two tone, $P_{IN}/\text{tone} = +14\text{ dBm}$ 10 MHz - 57 GHz | dBm | — | 51 | — |
| T_{ON} | 50% control to 90% RF | μs | — | 1.1 | — |
| T_{RISE} | 10% to 90% RF | μs | — | 0.5 | — |
| T_{OFF} | 50% control to 10% RF | μs | — | 0.16 | — |
| T_{FALL} | 90% to 10% RF | μs | — | 0.04 | — |
| Voltage Supply, VDD | — | V | +3.15 | +3.3 | +3.45 |
| Voltage Supply, VSS | — | V | -3.45 | -3.3 | -3.15 |
| Logic Voltage, Input Low (V_{IL}) | — | V | 0.0 | — | +0.8 |
| Logic Voltage, Input High (V_{IH}) | — | V | +1.2 | — | VDD |
| Supply Current, VDD | — | mA | — | 0.3 | 0.5 |
| Supply Current, VSS | — | mA | — | 0.66 | 1.0 |
| Logic Pin Current (V_{C1} / V_{C2}) | Pulled down to GND with 100 k Ω resistor | μA | — | VC*10 | — |

5. Parameters are measured on a test board that includes impedance matching. Device shall be aligned to recommended PCB footprint +/- 1 mil for optimum performance


Maximum Operating Conditions

| Parameter | Maximum |
|---|------------------|
| Input Power, 300 MHz to 40 GHz, RFC Port ⁶ RF1 / RF2 / RF3 / RF4 Port ⁶ | 26 dBm 26 dBm |
| VDD | -0.3 to +3.45 V |
| VSS | -3.45 to +0.3 V |
| VC1 / VC2 | -0.3 to 3.45 V |
| Operating Temperature ⁷ | -40 to +105°C |

6. T_{PADDLE} = 105 °C. See power derating curves for details.

7. Guarantees 10 years lifetime.

Power Derating Curve⁶

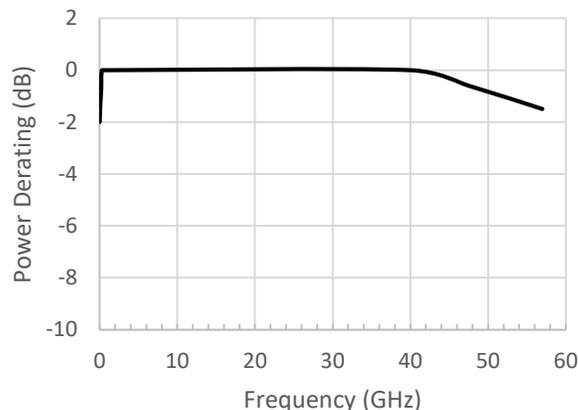

Absolute Maximum Ratings^{8,9,10}


| Parameter | Absolute Maximum |
|---|------------------|
| Input Power, 300 MHz to 40 GHz, RFC Port ⁶ RF1 / RF2 / RF3 / RF4 Port ⁶ | 27 dBm 27 dBm |
| VDD | -0.3 to +3.6 V |
| VSS | -3.6 to +0.3 V |
| VC1 / VC2 | -0.3 to 3.6 V |
| Junction Temperature | +135°C |

8. Exceeding any one or combination of these limits may cause permanent damage to this device.

9. MACOM does not recommend sustained operation near these survivability limits.

10. Based on testing with input power applied for 30 seconds.

Low Frequency Power Derating Detail⁶

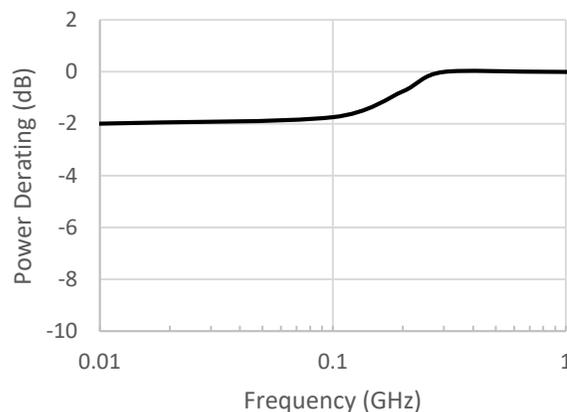

Truth Table

| Control 1 | Control 2 | Condition of Switch | | | |
|-----------------|-----------------|---------------------|-----|-----|-----|
| | | RF1 | RF2 | RF3 | RF4 |
| V _{IL} | V _{IL} | On | Off | Off | Off |
| V _{IH} | V _{IL} | Off | On | Off | Off |
| V _{IL} | V _{IH} | Off | Off | On | Off |
| V _{IH} | V _{IH} | Off | Off | Off | On |

Handling Procedures


Please observe the following precautions to avoid damage:

Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

| Parameter | Rating | Standard |
|----------------------------|----------|-------------------|
| Human Body Model (HBM) | Class 1C | ESDA/JEDEC JS-001 |
| Charged Device Model (CDM) | Class C3 | ESDA/JEDEC JS-002 |


Application Schematic

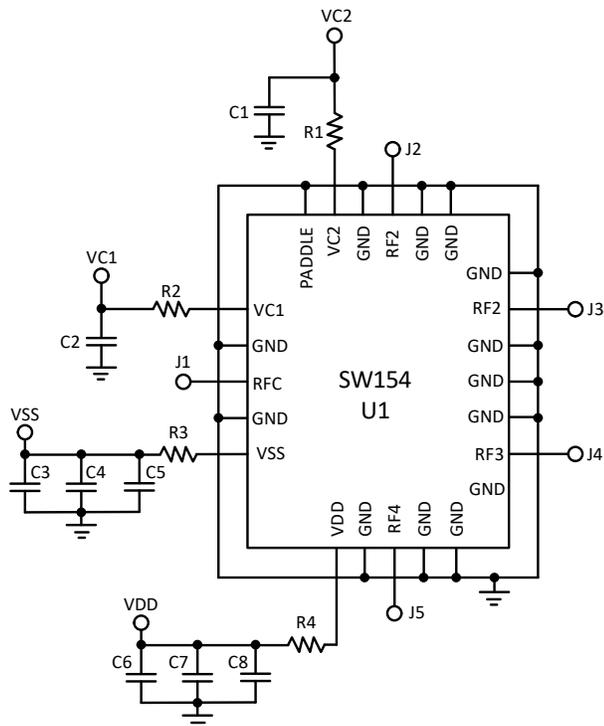

Impedance Match

MASW-011154-SB1 is a 2-layer board with 8 mil Rogers RO4003 dielectric material and 1 oz. copper on top and bottom layers. For this stack-up, 5 mil traces with 7 mil width are used for all RF port matching, as shown below.


The 50Ω RF transmission lines are CPWG of 14 mil width with 6.5 mil gap.

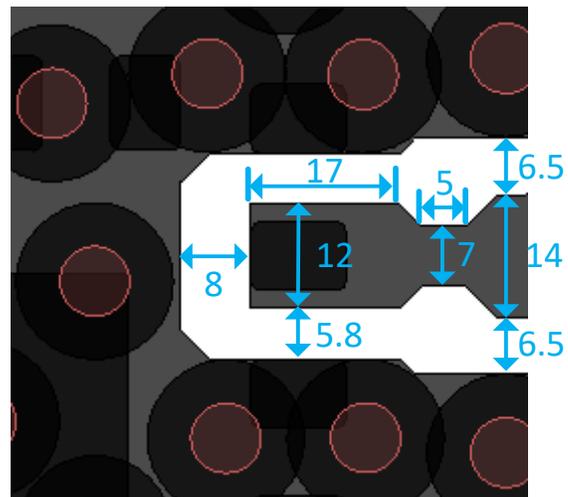

Parts List


| Part | Value | Case Style |
|---------|--------------------------|---------------|
| U1 | MASW-011154 | 3 mm, 22 Lead |
| C1, C2 | Capacitor, 5 pF, 16 V | 0402 |
| C3, C6 | Capacitor, 10 pF, 50 V | 0402 |
| C4, C7 | Capacitor, 1000 pF, 25 V | 0402 |
| C5, C8 | Capacitor, 1 μF, 10 V | 0402 |
| R1 - R4 | Resistor, 0 Ω | 0402 |
| J1 - J5 | Southwest 1892-04A-6 | End Launch |

Evaluation Board Layout

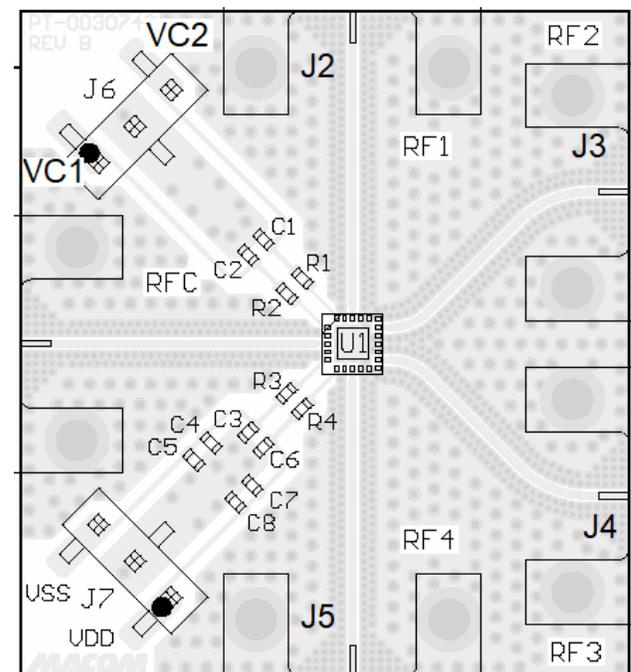


Typical Performance Curves


Insertion Loss¹¹

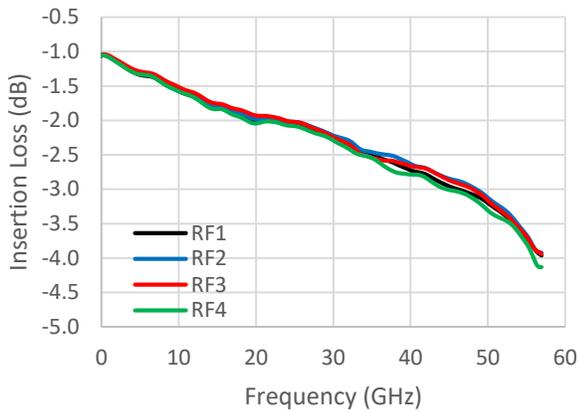


RFC to RF1 Insertion Loss over Temperature¹¹

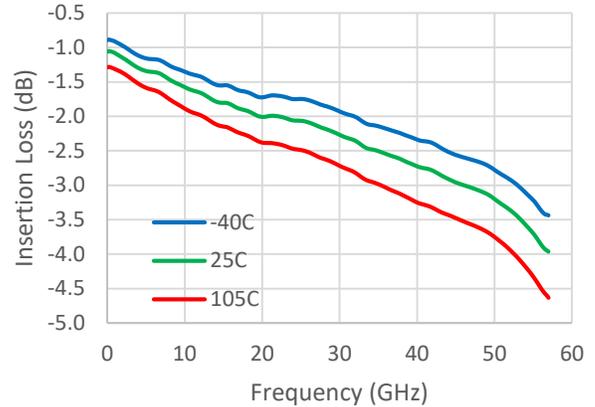


RFC Return Loss¹²

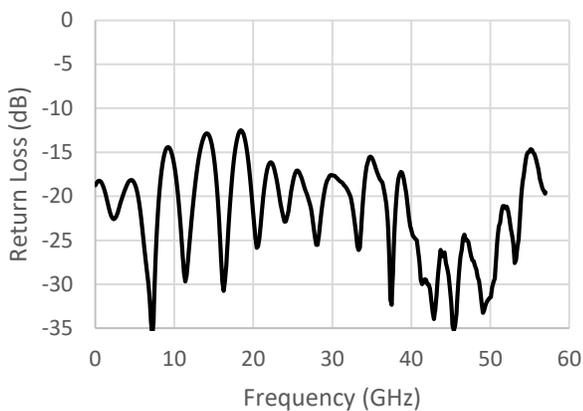


RF1/RF2/RF3/RF4 Return Loss¹²

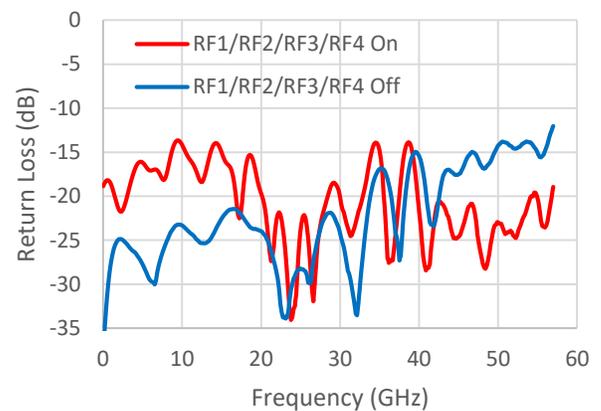

Evaluation Board Thru Line Insertion Loss

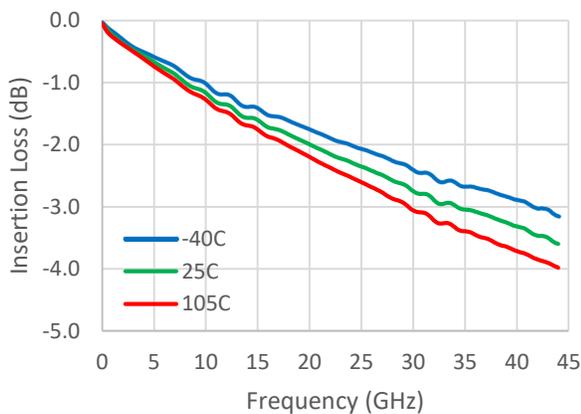

Evaluation Board Thru Line Return Loss

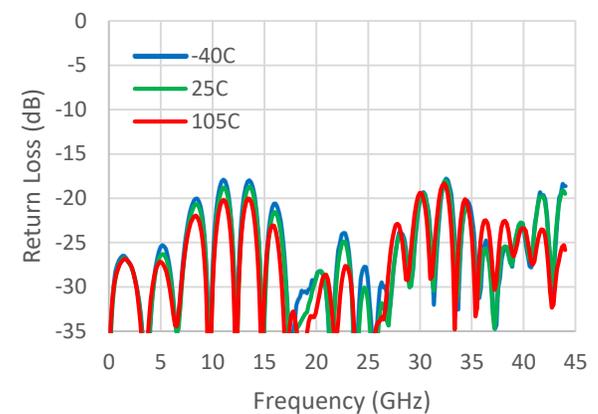


11. Insertion Loss and Isolation were measured using connectorized evaluation board with impedance match on RF transmission lines, and normalized using the insertion loss of the 50Ω thru line.

5 12. Return Loss with impedance match were measured using connectorized evaluation board with impedance match on RF transmission lines.


MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

Typical Performance Curves


RFC to RF2 / RF3 / RF4 Isolation, RFC to RF1 On¹¹

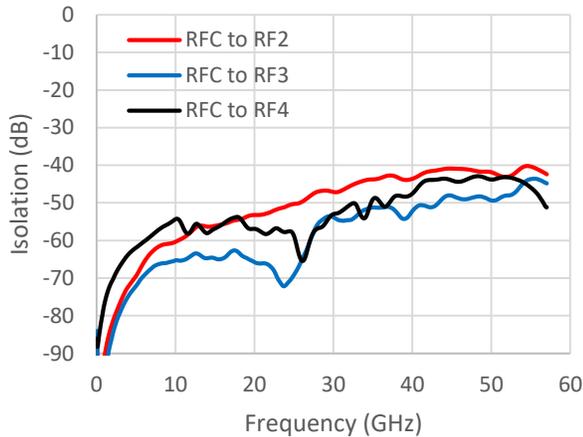


RFC to RF1 / RF2 / RF3 Isolation, RFC to RF4 On¹¹

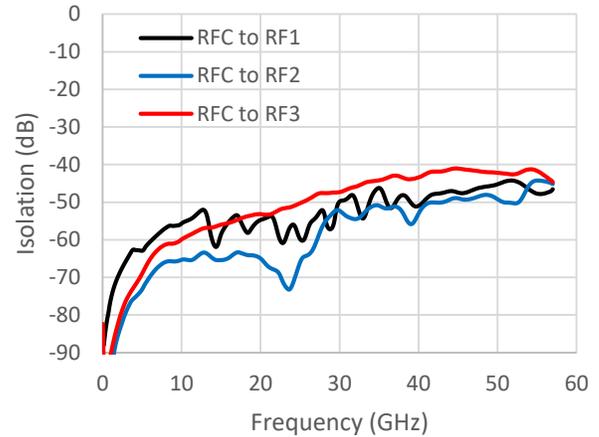


RFC to RF1 / RF3 / RF4 Isolation, RFC to RF2 On¹¹

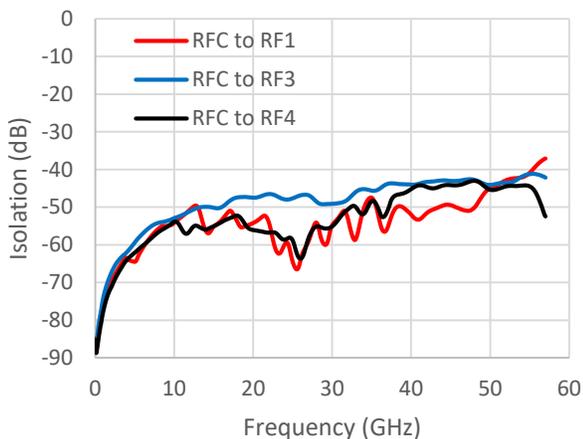


RFC to RF1 / RF2 / RF4 Isolation, RFC to RF3 On¹¹

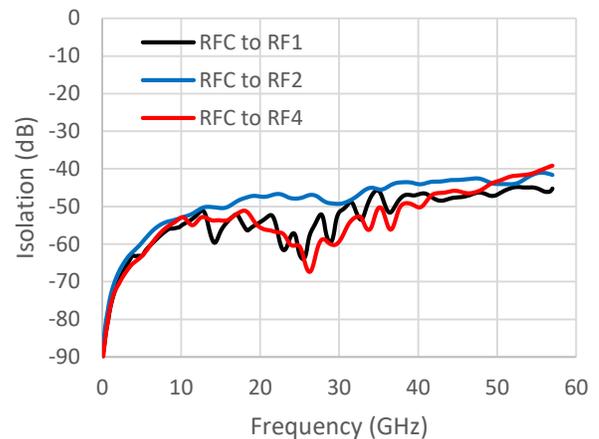

Isolation between RF1 to RF4, RFC to RF1 On¹¹

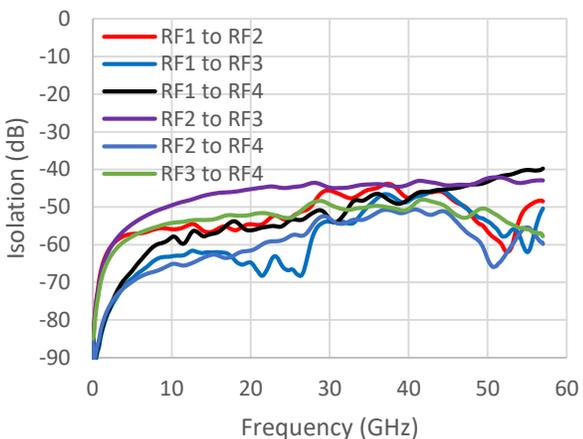


Isolation between RF1 to RF4, RFC to RF4 On¹¹

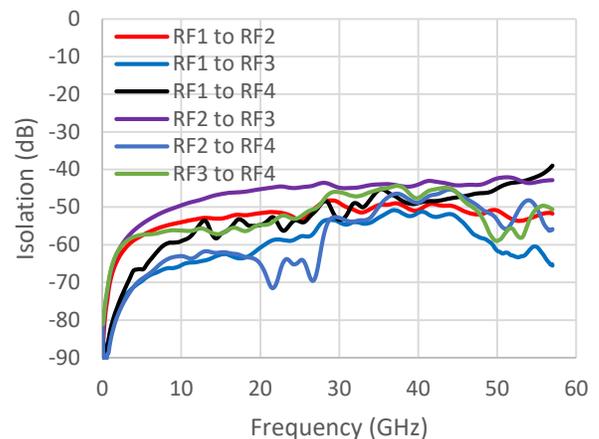


Typical Performance Curves


Isolation between RF1 to RF4, RFC to RF2 On¹¹

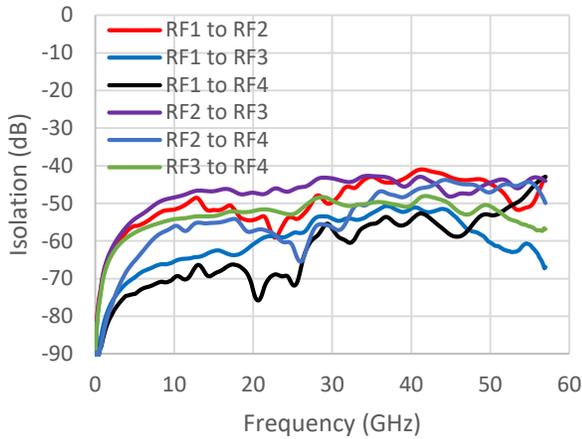


Isolation between RF1 to RF4, RFC to RF3 On¹¹

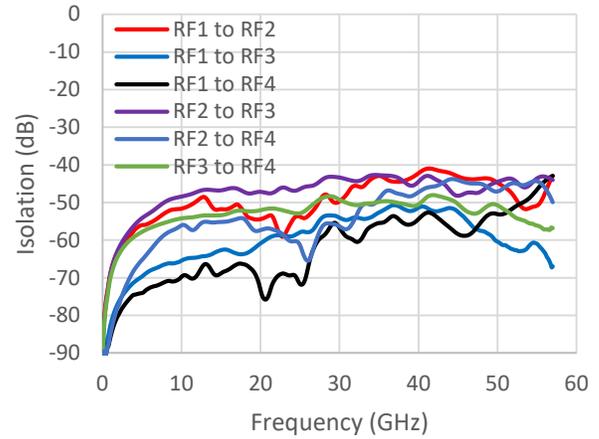


Input P0.1dB

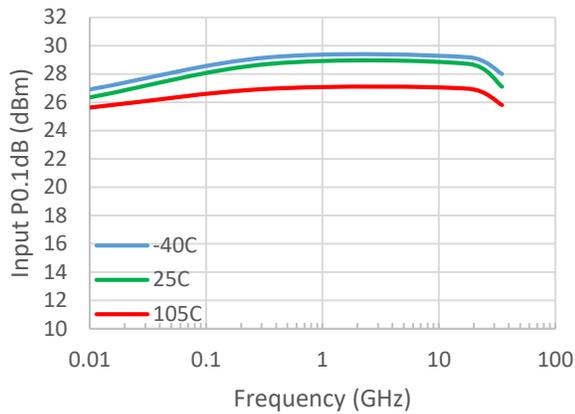

Input P1dB

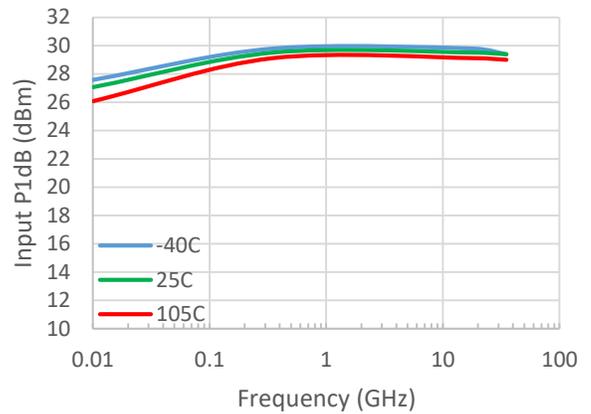


Input IP3¹³

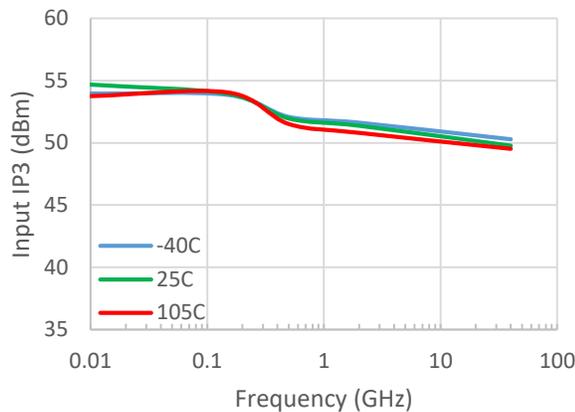

13. Input IP3 were measured using connectorized evaluation board with impedance matching. The RF input power was 14 dBm per tone with spacing of 1 MHz.

Lead Free 3 mm 22-Lead Laminate Package †

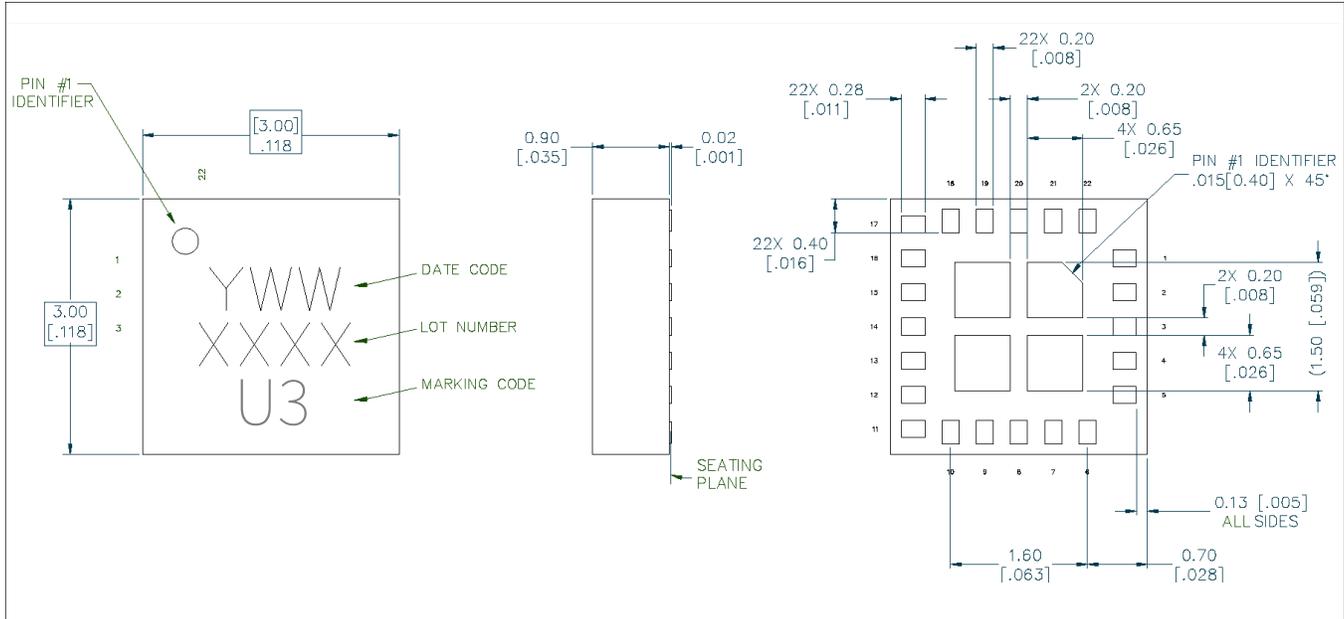

† Reference Application Note S2083 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level 3 requirements.
Plating is 100% matte tin over copper.

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.