

# Ø 32 mm 3.9 Watts 3.9 W with tags Part number 82860002



- Nominal power: 3 W
- Versions with tag or lead connection
- Versions without filter or with standard filter or class B filter built into the motor
- Versions with or without encoder, 1 or 5 pulses per revolution, built into the motor

#### Part numbers

Type	Type	Voltage	References
.)po	Type	Voltage	References
<b>82860002</b> 3.9 W with tags		24 V	Without filter

#### Specifications

No-load characteristics			
Speed of rotation (rpm)	5000		
Absorbed power (W)	1,92		
Absorbed current (A)	0,08		
Nominal characteristics			
Speed (rpm)	3700		
- / N )			

epeca (.p.i.)	0.00
Torque (mNm)	7,7
Usable power (W)	3
Absorbed power (W)	6
Absorbed current (A)	0,26
Gearbox case temperature rise (°C)	50
Efficiency (%)	50

#### **General characteristics**

Insulation class (conforming to IEC 85)	B (130 °C)
Protection rating	IP40
Max. output power (W)	3,9
Start torque (mNm)	30
Starting current (A)	0,76
Resistance (Ω)	32
Inductance (mH)	41,6
Torque constant (Nm/A)	0,0448
Electrical time constant (ms)	1,3
Mechanical time constant (ms)	36
Thermal time constant (mn)	8
Inertia (g.cm <sup>2</sup> )	19
Weight (g)	95
Number of of segments	3
Service life (h)	3000
Sintered bronze bearings	•
Leads connection 250 mm	-

## **Encoder characteristics**


Enough characteristics	
Connection	AWG24
Output current (mA)	< 20
Supply (V)	4.5 →30 DC

### Made to order products, available on request

- Other supply voltages
- Motor with 2 ball bearings
- Shaft lengths at front and/or rear
  Lead outputs or radial tag terminals
  Special interference suppression
- Encoder : 5 pulses/rev

### Dimensions (mm)


## 82 860 0 without encoder

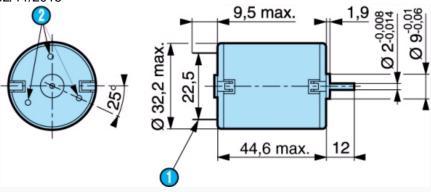

Nº	Legend	
1	3 holes at 120 °C over Ø 26 mm : use self-tapping M2.2 screws ; screw depth max. 6 mm	
<b>2</b>	2 tags NFC 20 - 120, series 2.8 x 0.5	

#### Curves


82860

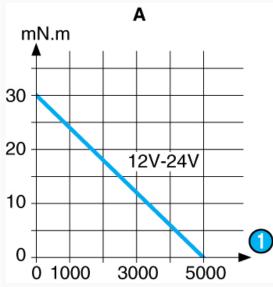

No.	Legend
0	rpm
×	Torque/nominal speed curve
Torque/nominal speed curves	
Torque/current curves	

Curves

82860

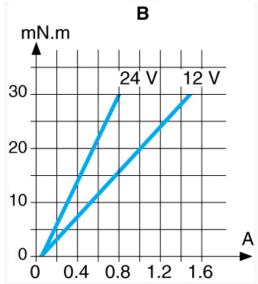

Nº	Legend
×	Torque/current curve

#### Product adaptations



- Special output shaftPinion on output shaftSpecial supply voltageSpecial cable length

- Special cable length
  Special ball bearings
  Special mounting plate
  Customised electronics
  Special connectors
  Shorter 1 W motor