
Data sheet | Item number: 706-150/340-200

Connection cable; 40-pole; Pluggable connector per DIN 41651; 40-pole; Pluggable connector per DIN 41651; Length: 2 m; Conductor cross-section: 0.14 mm²



www.wago.com/706-150/340-200

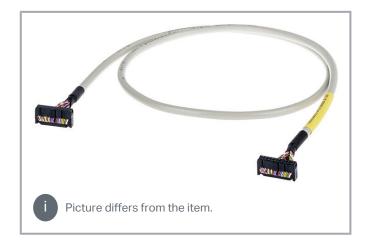

acc. to DIN VDE 47100	Color coding		connector
acc. to DIN VDE 47100		Pin number	
White			1
Brown			2
Green			3
Yellow			4
Grey			5
Pink			6
Blue			7
Red			8
Black			9
Violet			10
Grey-Pink			11
Red-Blue			12
White-Green			13
Brown-Green			14
White-Yellow			15
Yellow-Brown			16
White-Grey			17
Grey-Brown			18
White-Pink			19
Pink-Brown			20
White-Blue			21
Brown-Blue			22
White-Red			23
Brown-Red			24
White-Black			25
Brown-Black			26
Grey-Green			27
Yellow-Grey			28
Pink-Green			29
Yellow-Pink			30
Green-Blue			31
Yellow-Blue			32
Green-Red			33
Yellow-Red			34
Green-Black			35
Yellow-Black			36
Grey-Blue	T		37
Pink-Blue			38
Grey-Red			39
Pink-Red			40

Data Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A. $\,$

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 706-150/340-200

www.wago.com/706-150/340-200



_	100tri	\sim	l data
	ICCLI I	Ca.	ı uata

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Connector	Pluggable connector per DIN 41651; female connector
Pole number 1	40
Connection type 1	System
Wire cross-section	0.14 mm²
Connection type	Pluggable Connector per DIN 41651

Connection 2

Connector 2	Pluggable connector per DIN 41651; female connector
Pole number 2	40
Connection type 2	System

Physical data

Cable length	2 m

Material Data

Weight	382 g	

Environmental requirements

|--|--|--|

Commercial data

Packaging type	bag
PU (SPU)	1 pcs
ETIM 7.0	EC001855
ETIM 8.0	EC001855

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 706-150/340-200

www.wago.com/706-150/340-200



Country of origin	FR
GTIN	4055143976664
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-150/340-200

URL

Download

Connection cable; 40-pole; Pluggable connector per DIN 41651; 40-pole; Pluggable connector per DIN 41651; Length: 2 m; Conductor cross-section: 0.14 mm²

Installation Notes

 $\label{lem:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.