

# ICP DAS ETHERNET I/O MODULES

Various Digital I/O Function

Modbus TCP/UDP Protocol

32-bit Counter Function

Pair-connection Function

Low Power consumption

Easy Web configuration

Cost-effective



## ● Introduction


The functionality of the PETL-7000/t(P)ET series modules is almost the same as the PET-7000. The major difference is that the PET-7000 module supports user-defined web HMI interface and more connections, while the PETL-7000/t(P)ET supports higher speed of DI counter, frequency measurement, DO as PWM and ultra low power consumption. Especially the t(P)ET modules are designed with tiny form factor and small channel count that are suitable in room control and monitor applications.

Comparison Item	tPET	PETL-7000	PET-7000
CPU	32-bit ARM		80186
Ethernet		10/100 M, PoE	
Modbus TCP/UDP		Yes	
Web Configuration		Yes	
Web HMI	Simplified		Yes
Multi-client	Yes (Max. Connections: 5)		Yes (Max. Connections: 12)
IP Filter		Yes (white list)	
Latched DI		Yes	
DI as Counter	32-bit, 3.5 kHz		32-bit, 500 Hz
I/O Pair-Connection	Yes (Poll/Push Mode)		Yes (Poll Mode)
PWM	Yes (100 Hz Max.)		-
Frequency Measurement	Yes (3.5 kHz Max.)		-
Dual Watchdog	Yes (CPU, host)		Yes (Module, host)
ESD Protection		+/- 4 kV	
Surge Protection	-		+/- 0.5 kV
Form Factor	Tiny Size		Palm Size
Remarks	Cost-effective		-


Note: tET = tPET without PoE.

## DIO Pair-Connection (Mirror)

The PETL-7000/t(P)ET series Ethernet I/O modules support various I/O types, like photo-isolated digital input, relay contact, PhotoMOS relay, and open-collector output. The module can be used to create DI to DO pair-connection (mirror) through the Ethernet. Once the configuration is completed, the modules can automatically read the local DI status and write to remote DO channels via the Modbus TCP protocol in the background. It's useful when connecting digital I/O devices that do not themselves have Ethernet capability.

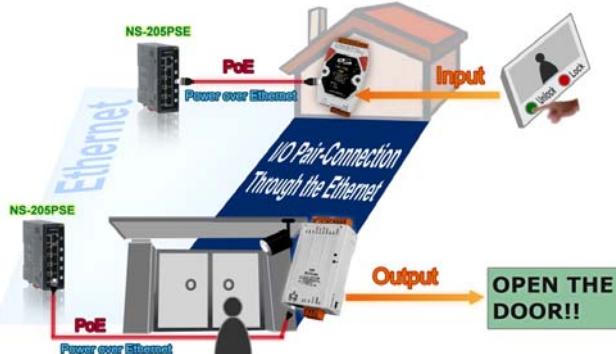

## DO as PWM (Pulse Width Modulation)

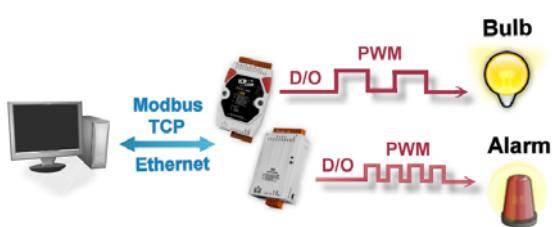


The DOs on the PETL-7000/t(P)ET series provide PWM (pulse width modulation, pulse generator) function that can be used in applications such as alarm light, flash light controls... etc. Once the configuration is finished, the module will automatically and continuously switch the DO output ON and OFF. This removes the busy control by remote host and also reduces the network loadings. Users can set different frequency (50 or 100 Hz Max.) and duty cycle for the PWM function in each digital output channel. In addition, the two DO channels can work independently or simultaneously. This function reduces the complexity of the control system and enhances the timing accuracy of pulse output.

for the PWM function in each digital output channel. In addition, the two DO channels can work independently or simultaneously. This function reduces the complexity of the control system and enhances the timing accuracy of pulse output.

## 32-bit High Speed Digital Counter

Polling the remote DI status back and then counting the ON/OFF changes in host computer may get quantity errors caused by communication delay. The PETL-7000/t(P)ET series module has built-in 32-bit counter function; it counts the DI ON/OFF changes in site to prevent counting errors caused by the communication latency. The 32-bit counter of the PETL-7000/t(P)ET modules can count up to 4,294,967,296 and accept a frequency up to 3,500 Hz (without filter), so it can suitable for more applications such as production counting, button or switch ON/OFF counting, event counting... etc..

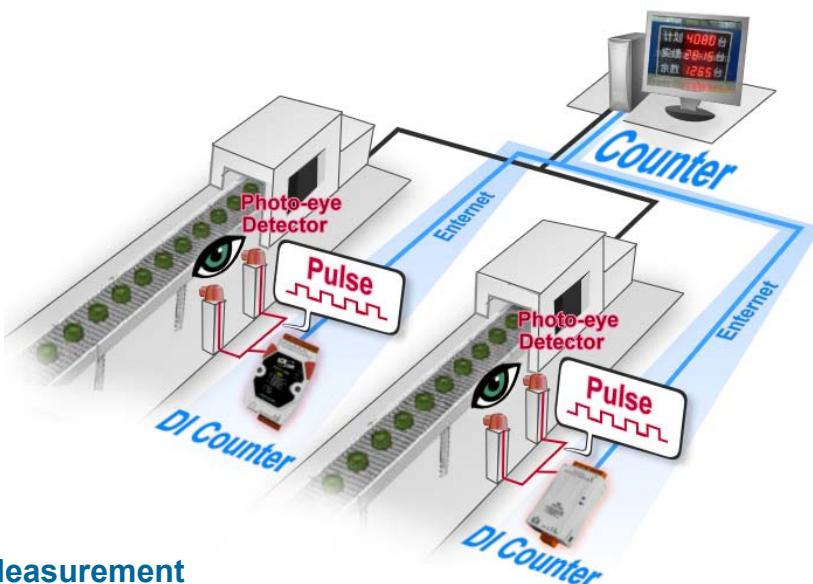

## Frequency Measurement

The PETL-7000/t(P)ET module also supports frequency measurement function; it counts the DI ON/OFF changes in a certain time and then calculate the frequency automatically. Rather than polling remote DI status back and then compute the frequency in the host PC, our module can directly count out the frequency (3.5 kHz Max.) in site. This reduces the frequency errors caused by communication latency between two ends, and also reduces the network loadings. In order to applying for more applications, this module provides 3 scan modes (0.1s, 1s and single-pulse) and 4 moving average levels for user to select the best way in their applications. This feature can be used for rotation and speed measurements... etc.

## Easy Network Configuration

DHCP minimizes configuration errors caused by manual IP address configuration, such as address conflicts caused by the assignment of an IP address to more than one computer or device at the same time. The PETL-7000/tET/tPET series module supports the DHCP client function, which allows the PETL-7000/tET/tPET to easily obtain the necessary TCP/IP configuration information from a DHCP server. The module also contains a UDP responder that transmits its IP address information to a UDP search from the eSearch utility program, making local management more efficient.

The series of Ethernet I/O modules features a powerful 32-bit MCU to enable efficient handling of network traffic. It also has a built-in web server that provides an intuitive web management interface to allow users to modify the settings of the module including DHCP/Static IP and gateway/mask.

## Dual Watchdog with Power-on and Safe Value

The module provides dual watchdog: CPU watchdog (hardware function) and host watchdog (software function). The CPU watchdog automatically resets the CPU if the built-in firmware is operating abnormally, while the host watchdog sets the digital output with predefined safe-value when there is no communication between the module and the host (PC or PLC) for a period of time (watchdog timeout). The dual watchdog is an important feature that ensures the module operates continuously, even in harsh environments.

## PoE (Power over Ethernet)




The PETL-7000/tPET series module offers true IEEE 802.3af-compliant (classification, Class 1) Power over Ethernet (PoE) using a standard category 5 Ethernet cable to receive power from a PoE switch such as the NS-205PSE. If there is no PoE switch on site, the module will also accept power input from a DC adapter. The PETL-7000/tET/tPET series is designed for ultra-low power consumption, reducing hidden costs from increasing fuel and electricity prices, especially when you have a huge amount of device servers installed. Reducing the amount of electricity consumed by choosing energy-efficient equipment can have a positive impact on maintaining a green environment.

The module is equipped with removable terminal block connectors to allow easy wiring. For maximum space savings, the tET/tPET series is offered in an amazing tiny form-factor while the PETL-7000 series is palm-size form-factor; this makes them can be easily installed in anywhere, even directly embedded into a machine.

## ● Applications

- Remote Maintenance
- Remote diagnosis
- Testing Equipment
- Building Automation
- Factory Automation
- Machine Automation

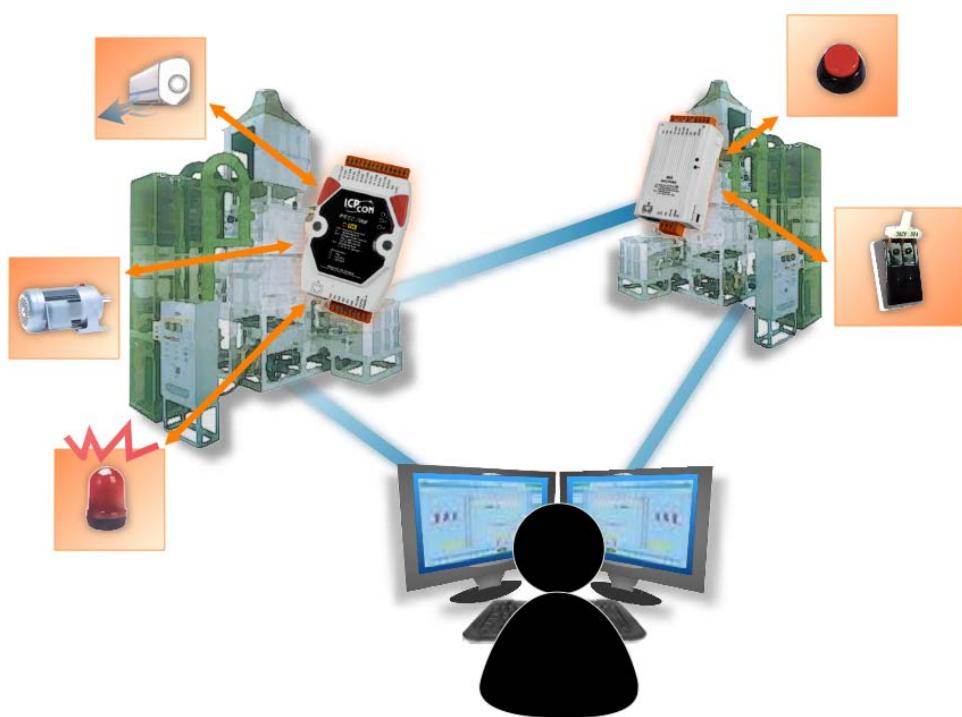

## Ethernet I/O Module



### ● Selection Guide



### PETL-7000 Selection Guide

Digital I/O							
Model	Ethernet	DI			DO		
		Channel	Type	Sink/Source	Channel	Type	Sink/Source
PETL-7042	10/100 M, PoE	-	-	-	16	Open Collector	Sink
PETL-7044	10/100 M, PoE	8	Wet	Sink, Source	8	Open Collector	Sink
PETL-7050	10/100 M, PoE	12	Wet	Sink, Source	6	Open Collector	Sink
PETL-7051	10/100 M, PoE	16	Wet	Sink, Source	-	-	-
PETL-7052	10/100 M, PoE	8	Wet	Sink, Source	8	Open Collector	Source
PETL-7053	10/100 M, PoE	16	Dry	Source	-	-	-

Relay Output/Digital Input							
Model	Ethernet	DI			Relay Output		
		Channel	Type	Sink/Source	Channel	Relay	Type
PETL-7060	10/100 M, PoE	6	Wet	Sink, Source	6	Power Relay	Form A (SPST N.O.)
PETL-7065	10/100 M, PoE	6	Wet	Sink, Source	6	PhotoMOS Relay	Form A (SPST N.O.)
PETL-7066	10/100 M, PoE	-	-	-	8	PhotoMOS Relay	Form A (SPST N.O.)
PETL-7067	10/100 M, PoE	-	-	-	8	Power Relay	Form A (SPST N.O.)



**PETL-7000 Series**  
Ethernet module with PoE and Digital I/O

## Features

- Cost-effective Ethernet I/O modules (Modbus TCP/UDP)
- Contains a 32-bit MCU that efficiently handles network traffic
- 10/100 Base-TX Ethernet, RJ-45 x1  
(Auto-negotiating, Auto MDI/MDIX, LED Indicator)
- Includes redundant power inputs: PoE and DC input
- Supports TCP, UDP, HTTP, DHCP, BOOTP and TFTP protocols
- Supports UDP responder for device discovery
- Supports web configuration and firmware update via Ethernet
- Supports PWM (Pulse Width Modulation) in DO channels
- Supports latched DI and 32-bit high-speed counter functions
- Supports I/O pair-connection through the Ethernet
- Dual-watchdog with power-on and safe value
- Easy DIN-Rail mounting
- RoHS compliant & no Halogen
- Made from fire retardant materials (UL94-VO Level)
- Low power consumption (about 1.7 W only)

Modul	PETL-7042/7044/7050/7051/7052/7053/7060/7065/7066/7067
<b>System</b>	
CPU	32-bit MCU
Dual Watchdog	Yes
<b>Communication</b>	
Ethernet Port	10/100 Base-TX, 8-Pin RJ-45 x1, (Auto-negotiating, Auto-MDI/MDIX, LED indicator) PoE (IEEE 802.3af, Class 1)
<b>LED Display</b>	
PoE	PoE indicator
L1	Run indicator
L2	Link/Act indicator
L3	10/100 M indicator
<b>Mechanical</b>	
Dimensions	123 mm x 72 mm x 35 mm
Installation	DIN-Rail or Wall mounting
<b>Environment</b>	
Operating Temperature	-25 °C ~ +75 °C
Storage Temperature	-30 °C ~ +80 °C
Humidity	10 ~ 90 % RH, non-condensing
<b>Power Requirements</b>	
Power Input	PoE: IEEE 802.3af, Class 1 Terminal block: +12 ~ 48 V <sub>DC</sub> (non-regulated)
Power Consumption	0.05 A @ 48 V <sub>DC</sub> Max. for PETL-7060

 I/O Specifications

## Digital Input/Output Series

Models			
	PETL-7042	PETL-7044	PETL-7050
<b>Digital Input</b>			
Input Channels	-	8	12
Input Type (Device)	-	Wet Contact (Sink, Source)	
On Voltage Level	-	+10 V <sub>DC</sub> ~ +50 V <sub>DC</sub>	
Off Voltage Level	-	+4 V <sub>DC</sub> max.	
Input Impedance	-	10 k Ohm	
Counters	-	Max. Count: 4,294,967,285 (32 bits)	
	-	Max. Input Frequency: 3.5 kHz (without filter)	
	-	Min. Pulse Width: 0.15 ms	
Frequency Measurement	-	3.5 kHz in Mode "1000 ms" (+/-1 Hz error)	
Overvoltage Protection	-	+70 V <sub>DC</sub>	
Isolation	-	3750 Vrms	
<b>Digital Output</b>			
Output Channels	16	8	6
Output Type (Module)	Sink, Open Collector		
Output Voltage	+5 V <sub>DC</sub> ~ +30 V <sub>DC</sub>	+10 V <sub>DC</sub> ~ +40 V <sub>DC</sub>	+5 V <sub>DC</sub> ~ +30 V <sub>DC</sub>
Max. Load Current	100 mA/channel at 25 °C	300 mA/channel at 25 °C	100 mA/channel at 25 °C
PWM	100 Hz Max. (High/Low duty cycle range = 5 ~ 65,535 ms)		
Short Circuit Protection	Yes		
Output Isolation	3750 Vrms		

Models			
	PETL-7051	PETL-7052	PETL-7053
<b>Digital Input</b>			
Input Channels	16	8	16
Input Type (Device)	Wet Contact (Sink, Source)		Dry Contact
On Voltage Level	+10 V <sub>DC</sub> ~ +50 V <sub>DC</sub>		Open
Off Voltage Level	+4 V <sub>DC</sub> max.		Close to GND
Input Impedance	10 k Ohm		
Counters	Max. Count: 4,294,967,285 (32 bits)		
	Max. Input Frequency: 3.5 kHz (without filter)		
	Min. Pulse Width: 0.15 ms		
Frequency Measurement	3.5 kHz in Mode "1000 ms" (+/-1 Hz error)		
Overvoltage Protection	+70 V <sub>DC</sub>		-
Effective Distance	-		500 m max.
Isolation	3750 Vrms		
<b>Digital Output</b>			
Output Channels	-	8	-
Output Type (Module)	-	Source, Open Collector	-
Output Voltage	-	+10 V <sub>DC</sub> ~ +40 V <sub>DC</sub>	-
Max. Load Current	-	650 mA/channel at 25 °C	-
PWM	-	100 Hz Max. (High/Low duty cycle range= 5 ~ 65,535 ms)	-
Overvoltage Protection	-	+48 V <sub>DC</sub>	-
Output Isolation	-	3750 Vrms	-


## Digital Input/Relay Output Series

Models		
	PETL-7060	PETL-7067
<b>Digital Input</b>		
Input Channels	6	-
Input Type (Device)	Wet Contact (Sink, Source)	-
On Voltage Level	+10 V <sub>DC</sub> ~ +50 V <sub>DC</sub>	-
Off Voltage Level	+4 V <sub>DC</sub> max.	-
Input Impedance	10 k Ohm	-
Counters	Max. Count: 4,294,967,285 (32 bits)	-
	Max. Input Frequency: 3.5 kHz (without filter)	-
	Min. Pulse Width: 0.15 ms	-
Frequency Measurement	3.5 kHz in Mode "1000 ms" (+/-1 Hz error)	-
Oversupply Protection	+70 V <sub>DC</sub>	-
Isolation	3750 Vrms	-
<b>Relay Output</b>		
Output Channels	6	8
Output Type (Module)	Power Relay, Form A (SPST N.O.)	
Output Voltage Range	250 V <sub>AC</sub> /30 V <sub>DC</sub>	
Max. Load Current	5.0 A/channel at 25 °C	
Operate Time	6 ms	
Release Time	4 ms	
PWM	50 Hz Max. (High/Low duty cycle range = 10 ~ 65,535 ms)	
Electrical Life (Resistive load)	5 A 250 V <sub>AC</sub> 30,000 ops (10 ops/minute) at 75 °C	
	5 A 30 V <sub>DC</sub> 70,000 ops (10 ops/minute) at 75 °C	
UL	5 A 250 V <sub>AC</sub> /30 V <sub>DC</sub> 6,000 ops	
	3 A 250 V <sub>AC</sub> /30 V <sub>DC</sub> 100,000 ops	
Mechanical Life	20,000,000 ops. At no load (300 ops./ minute)	
Relay Output Isolation	3000 Vrms	

Models		
	PETL-7065	PETL-7066
<b>Digital Input</b>		
Input Channels	6	-
Input Type (Device)	Wet Contact (Sink, Source)	-
On Voltage Level	+10 V <sub>DC</sub> ~ +50 V <sub>DC</sub>	-
Off Voltage Level	+4 V <sub>DC</sub> max.	-
Input Impedance	10 k Ohm	-
Counters	Max. Count: 4,294,967,285 (32 bits)	-
	Max. Input Frequency: 3.5 kHz (without filter)	-
	Min. Pulse Width: 0.15 ms	-
Frequency Measurement	3.5 kHz in Mode "1000 ms" (+/-1 Hz error)	-
Oversupply Protection	+70 V <sub>DC</sub>	-
Isolation	3750 Vrms	-
<b>Relay Output</b>		
Output Channels	6	8
Output Type (Module)	PhotoMOS Relay, Form A	
Load Voltage	60 V <sub>DC</sub> / V <sub>AC</sub>	
Load Current	60 V/1.0 A (Operating Temperature -25°C ~ -40°C)	
	60 V/0.8 A (Operating Temperature +40°C ~ +60°C)	
	60 V/0.7 A (Operating Temperature +60°C ~ +75°C)	
PWM	50 Hz Max. (High/Low duty cycle range = 10 ~ 65,535 ms)	
Turn ON Time	1.3 ms (Typical)	
Turn Off Time	0.1 ms (Typical)	
Relay Output Isolation	3000 Vrms	

### Pin Assignments

#### Digital Input/Output Series



**PETL-7042**

**PETL-7042**

23	DO11
22	DO10
21	DO9
20	DO8
19	DO7
18	DO6
17	DO5
16	DO4
15	DO3
14	DO2
13	DO1
12	DO0
11	DO.GND1
10	DO.PWR1

**PETL-7044**

23	DI2
22	DI1
21	DI0
20	DI.COM1
19	DO7
18	DO6
17	DO5
16	DO4
15	DO3
14	DO2
13	DO1
12	DO0
11	DO.GND
10	DO.PWR

**PETL-7044**

23	DI5
22	DI4
21	DI3
20	DU2
19	DI1
18	DI0
17	DO5
16	DO4
15	DO3
14	DO2
13	DO1
12	DO0
11	DO.GND
10	DO.PWR

**PETL-7050**

23	DI6
22	DI7
21	DI8
20	DI.COM
19	DI11
18	DI10
17	DI9
16	DI8
15	DI7
14	DI6
13	DI5
12	DI4
11	DI3
10	DI2
9	DI1
8	DI0
7	N/A
6	(R)+Vs
5	(B)GND

**PETL-7050**

23	DI15
22	DI14
21	DI13
20	DI12
19	DI11
18	DI10
17	DI9
16	DI8
15	DI7
14	DI6
13	DI5
12	DI4
11	DI3
10	DI2
9	DI1
8	DI0
7	N/A
6	(R)+Vs
5	(B)GND

**PETL-7051**

**PETL-7051**

23	DI12
22	DI11
21	DI10
20	DI9
19	DI8
18	DI.COM1
17	DI7
16	DI6
15	DI5
14	DI4
13	DI3
12	DI2
11	DI1
10	DI0

**PETL-7052**

23	DI2
22	DI1
21	DI0
20	DI.COM1
19	DO7
18	DO6
17	DO5
16	DO4
15	DO3
14	DO2
13	DO1
12	DO0
11	DO.GND
10	DO.PWR


**PETL-7052**

**PETL-7053**

23	DI12
22	DI11
21	DI10
20	DI9
19	DI8
18	DI7
17	DI6
16	DI5
15	DI4
14	DI3
13	DI2
12	DI1
11	DI0
10	DI.GND1

**PETL-7053**

#### Digital Input/Relay Output Series



**PETL-7060**

**PETL-7065**

**PETL-7060**

**PETL-7065**

23	RL5 COM
22	RL5 NO
21	RL4 COM
20	RL4 NO
19	RL3 COM
18	RL3 NO
17	RL2 COM
16	RL2 NO
15	RL1 COM
14	RL1 NO
13	RLO COM
12	RLO NO
11	N/A
10	N/A

**PETL-7066**


**PETL-7067**

**PETL-7066**

**PETL-7067**

23	RL5 COM
22	RL5 NO
21	RL4 COM
20	RL4 NO
19	RL3 COM
18	RL3 NO
17	RL2 COM
16	RL2 NO
15	RL1 COM
14	RL1 NO
13	RLO COM
12	RLO NO
11	N/A
10	N/A

### Dimensions (Unit:mm)

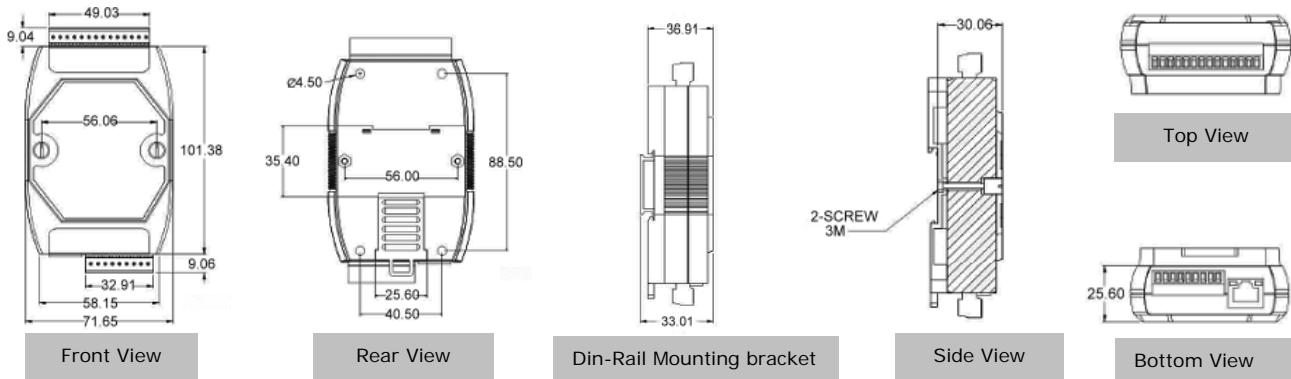


### Ordering Information

PETL-7042 CR <span style="color:red">(Available soon)</span>	Ethernet module with PoE and 16-ch isolated open collector (sink) DO (RoHS)
PETL-7044 CR <span style="color:red">(Available soon)</span>	Ethernet module with PoE, 8-ch isolated DI and 8-ch Isolated open collector (sink) DO (RoHS)
PETL-7050 CR <span style="color:red">(Available soon)</span>	Ethernet module with PoE, 12-ch isolated DI and 6-ch isolated open collector (sink) DO (RoHS)
PETL-7051 CR <span style="color:red">(Available soon)</span>	Ethernet module with PoE and 16-ch isolated DI (RoHS)
PETL-7052 CR <span style="color:red">(Available soon)</span>	Ethernet module with PoE, 8-ch isolated DI and 8-ch open collector (source) DO (RoHS)
PETL-7053 CR <span style="color:red">(Available soon)</span>	Ethernet module with PoE and 16-ch isolated dry-contact DI (RoHS)
PETL-7060 CR <span style="color:red">(NEW)</span>	Ethernet module with PoE, 6-ch isolated DI and 6-ch Form A power relay (RoHS)
PETL-7065 CR <span style="color:red">(Available soon)</span>	Ethernet module with PoE, 6-ch isolated DI and 6-ch PhotoMOS relay (RoHS)
PETL-7066 CR <span style="color:red">(Available soon)</span>	Ethernet module with PoE and 8-ch PhotoMOS relay (RoHS)
PETL-7067 CR <span style="color:red">(Available soon)</span>	Ethernet module with PoE and 8-ch Form A power relay (RoHS)

### Accessories

NS-205 CR	Unmanaged 5-Port Industrial Ethernet Switch (RoHS)
NS-205PSE CR	Unmanaged Ethernet Switch with 4 PoE Ports and 1 RJ-45 Uplink (RoHS)
NS-205PSE-24V CR	Unmanaged 5-Port 10/100 Mbps PoE (PSE) Ethernet Switch; 24 Vdc Input (RoHS)
DIN-KA52F CR	24 V/1.04 A, 25 W Power Supply with DIN-Rail Mounting (RoHS)
DIN-KA52F-48 CR	48 V/0.52 A, 25 W Power Supply with Din-Rail Mounting (RoHS, for NS-205PSE)
GPSU06U-6	24 V/0.25 A (max) Power Supply

NS-205 CR      NS-205PSE CR      NS-205PSE-24V CR      DIN-KA52F CR      DIN-KA52F-48 CR      GPSU06U-6

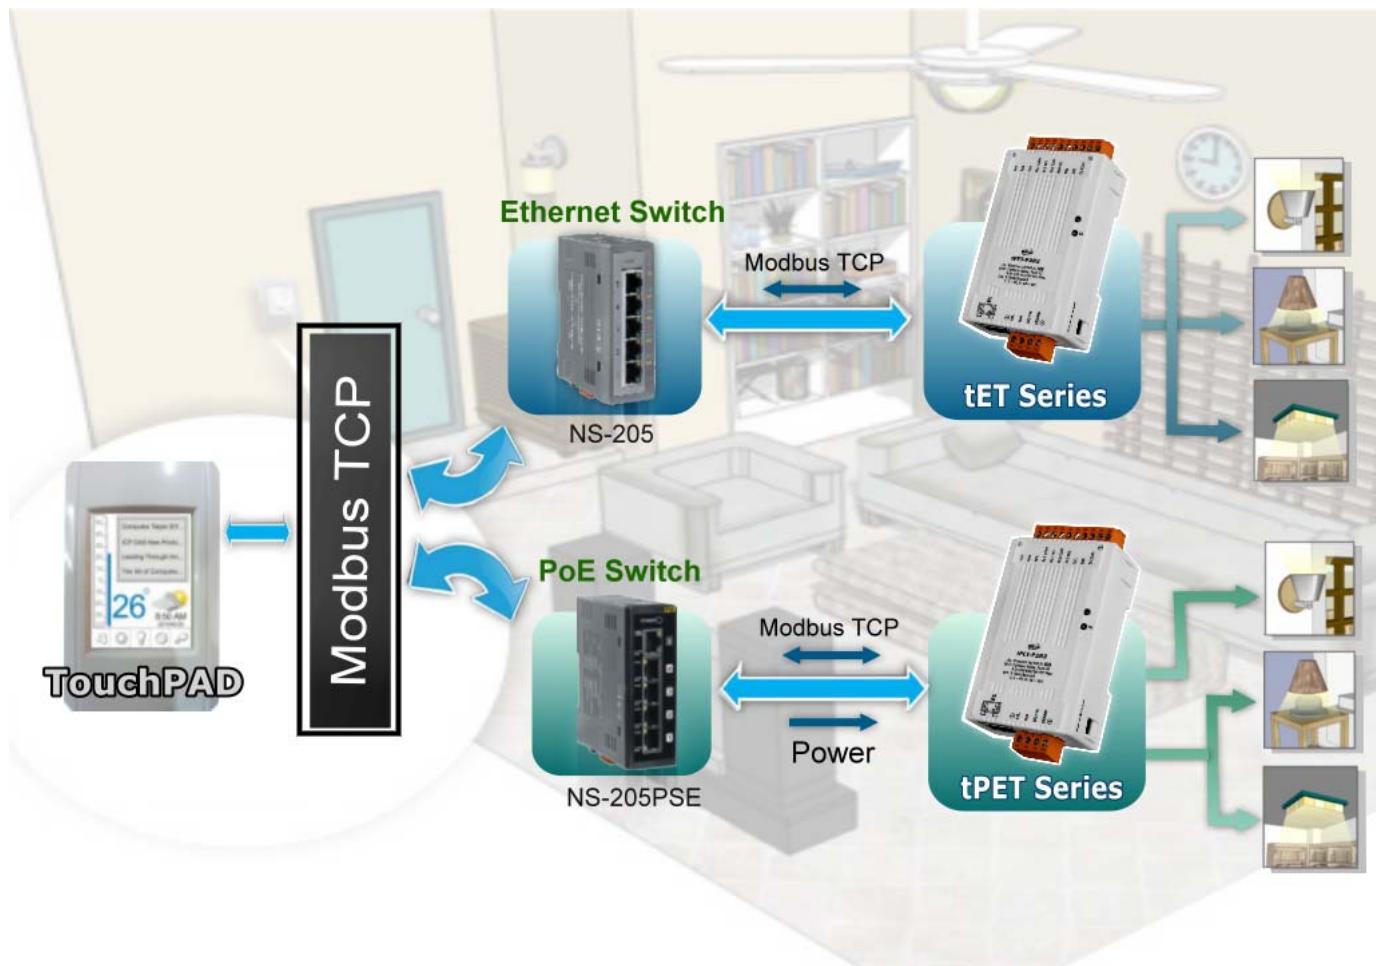

### ● Selection Guide



### tET/tPET Selection Guide

Model Name		Bus	Protocol	I/O Specification		
Ethernet	PoE			Isolation	DI	DO
tET-P6	tPET-P6	Ethernet 10/100 M	Modbus TCP/UDP	Yes	6-ch (Sink/Source)	-
tET-C4	tPET-C4			Yes	-	4-ch (NPN, Sink)
tET-A4	tPET-A4			Yes	-	4-ch (PNP, Source)
tET-P2C2	tPET-P2C2			Yes	2-ch (Sink/Source)	2-ch (NPN, Sink)
tET-P2A2	tPET-P2A2			Yes	2-ch (Sink/Source)	2-ch (PNP, Source)
tET-P2POR2	tPET-P2POR2			Yes	2-ch (Sink/Source)	2-ch Form A PhotoMos Relay
tET-P2R2	tPET-P2R2			Yes	2-ch (Sink/Source)	2-ch Form A Power Relay



**Available soon**

## tET/tPET Series

Tiny Ethernet I/O modules

### Features

- Cost-effective tiny Ethernet I/O modules (Modbus TCP/UDP)
- Contains a 32-bit MCU that efficiently handles network traffic
- 10/100 Base-TX Ethernet, RJ-45 x1  
(Auto-negotiating, auto MDI/MDIX, LED Indicators)
- Includes redundant power inputs: PoE and DC input
- Supports TCP, UDP, HTTP, DHCP, BOOTP and TFTP protocols
- Supports UDP responder for device discovery
- Supports web configuration and firmware update via Ethernet
- Supports PWM (Pulse Width Modulation) in DO channels
- Supports latched D/I and 32-bit low-speed counter functions
- Supports I/O pair-connection through the Ethernet
- Dual-watchdog with power-on and safe value
- Tiny form-factor with easy DIN-Rail mounting
- RoHS compliant & no Halogen
- Made from fire retardant materials (UL94-VO Level)
- Low power consumption (about 1.7 W only)



## System Specifications

Modul	tET Series	tPET Series
<b>System</b>		
CPU	32-bit MCU	
Dual Watchdog	Yes	
<b>Communication</b>		
Ethernet Port	10/100 Base-TX, 8-Pin RJ-45 x1, (Auto-negotiating, Auto-MDI/MDIX, LED indicator)	PoE (IEEE 802.3af, Class 1)
-		
<b>LED Display</b>		
S1	- System indicator (Red)	PoE Indicator (Green)
E1	Link/Act indicator (Green) 10/100 M indicator (Yellow)	
<b>Mechanical</b>		
Dimensions	52 mm x 27 mm x 98 mm	
Installation	DIN-Rail mounting	
<b>Environment</b>		
Operating Temperature	-25 °C ~ +75 °C	
Storage Temperature	-30 °C ~ +80 °C	
Humidity	10 ~ 90 % RH, non-condensing	
<b>Power Requirements</b>		
Power Input	- Terminal block: +12 ~ 48 V <sub>DC</sub> (non-regulated)	PoE: IEEE 802.3af, Class 1
Power Consumption	0.04 A @ 24 V <sub>DC</sub> for tET-P2R2	0.03 A @ 48 V <sub>DC</sub> for tPET-P2R2

## I/O Specifications

### Digital Input/Output Series







Models		
	tET-C4/tPET-C4	tET-A4/tPET-A4
<b>Digital Output</b>		
Output Channels	4	
Output Type (Module)	Sink, Open Collector (NPN)	Source, Open Collector (PNP)
Output Voltage	+5 V <sub>DC</sub> ~ +30 V <sub>DC</sub>	+10 V <sub>DC</sub> ~ +40 V <sub>DC</sub>
Max. Load Current	100 mA/channel at 25 °C Direct drive power relay module	650 mA/channel at 25 °C
PWM	100 Hz Max. (High/Low duty cycle range = 5 ~ 65,535 ms)	
Over-Voltage	+60 V <sub>DC</sub>	+48 V <sub>DC</sub>
Short Circuit Protection	-	Yes
Output Isolation	3750 Vrms	

Models			
	tET-P6/tPET-P6	tET-P2C2/tPET-P2C2	tET-P2A2/tPET-P2A2
<b>Digital Input</b>			
Input Channels	6	2	
Input Type (Device)	Wet Contact (Sink, Source)		
On Voltage Level	+10 V <sub>DC</sub> ~ +50 V <sub>DC</sub>		
Off Voltage Level	+4 V <sub>DC</sub> max.		
Input Impedance	10 k Ohm		
Counters	Max. Count: 4,294,967,285 (32 bits)		
	Max. Input Frequency: 3.5 kHz (without filter)		
	Min. Pulse Width: 0.15 ms		
Frequency Measurement	3.5 KHz in Mode "1000 ms" (+/-1 Hz error)		
Oversupply Protection	+70 V <sub>DC</sub>		
Isolation	3750 Vrms		
<b>Digital Output</b>			
Output Channels	-	2	
Output Type (Module)	-	Sink, Open Collector (NPN)	Source, Open Collector (PNP)
Output Voltage	-	+5 V <sub>DC</sub> ~ +30 V <sub>DC</sub>	+10 V <sub>DC</sub> ~ +40 V <sub>DC</sub>
Max. Load Current	-	100 mA/channel at 25 °C Direct drive power relay module	650 mA/channel at 25 °C
PWM		100 Hz Max. (High/Low duty cycle range= 5 ~ 65,535 ms)	
Over-Voltage	-	+60 V <sub>DC</sub>	+48 V <sub>DC</sub>
Short Circuit Protection	-	-	Yes
Output Isolation	-	3750 Vrms	


## Digital Input/Relay Output Series

Models		
	tET-P2POR2/tPET-P2POR2	tET-P2R2/tPET-P2R2
<b>Digital Input</b>		
Input Channels	2	
Input Type (Device)	Wet Contact (Sink, Source)	
On Voltage Level	+10 V <sub>DC</sub> ~ +50 V <sub>DC</sub>	
Off Voltage Level	+4 V <sub>DC</sub> Max.	
Input Impedance	10 k Ohm	
	Max. Count: 4,294,967,285 (32 bits)	
Counters	Max. Input Frequency: 3.5 kHz (without filter)	
	Min. Pulse Width: 0.15 ms	
Frequency Measurement	3.5 kHz in Mode "1000 ms" (+/-1 Hz error)	
Oversupply Protection	+70 V <sub>DC</sub>	
Isolation	3750 Vrms	
<b>Relay Output</b>		
Output Channels	2	2
Output Type (Module)	PhotoMOS Relay, Form A	Power Relay, Form A (SPST N.O.)
Load Voltage	60 V <sub>DC</sub> / V <sub>AC</sub>	-
	60 V/1.0 A (Operating Temperature -25°C ~ -40°C)	-
Load Current	60 V/0.8 A (Operating Temperature +40°C ~ +60°C)	-
	60 V/0.7 A (Operating Temperature +60°C ~ +75°C)	-
Turn ON Time	1.3 ms (Typical)	-
Turn Off Time	0.1 ms (Typical)	-
Output Isolation	3000 Vrms	3000 Vrms
Output Voltage Range	-	250 V <sub>AC</sub> /30 V <sub>DC</sub>
Max. Load Current	-	5.0 A/channel at 25 °C
Operate Time	-	6 ms
Release Time	-	3 ms
PWM	50 Hz Max. (High/Low duty cycle range= 10 ~ 65,535 ms)	
Electrical Life (Resistive load)	VED	5 A 250 V <sub>AC</sub> 30,000 ops (10 ops/minute) at 75 °C
	UL	5 A 30 V <sub>DC</sub> 70,000 ops (10 ops/minute) at 75 °C
Mechanical Life	-	5 A 250 V <sub>AC</sub> /30 V <sub>DC</sub> 6,000 ops
	-	3 A 250 V <sub>AC</sub> /30 V <sub>DC</sub> 100,000 ops
	-	20,000,000 ops. At no load (300 ops./ minute)

## Pin Assignments

<b>tET/tPET-C4</b> <b>tET/tPET-A4</b>		<b>tET/tPET-C4</b> <b>tET/tPET-A4</b>		<b>tET/tPET-P6</b>		<b>tET/tPET-P6</b>	
E1	Link/Act 10/100 M	14 N/A 13 N/A 12 N/A 11 N/A 10 DO3 09 DO2 08 DO1 07 DO0 06 DO.PWR 05 DO.GND	E1	Link/Act 10/100 M	14 N/A 13 N/A 12 N/A 11 DI5 10 DI4 09 DI3 08 DI2 07 DI1 06 DI0 05 DI.COM		
01	F.G. N/A	01 F.G. 02 N/A	01 F.G. 02 N/A	01 F.G. 02 N/A	01 F.G. 02 N/A	01 RL1 COM 10 RL1 NO 09 RLO COM 08 RLO NO 07 DI1 06 DI0 05 DI.COM	
03	(R)+Vs	03 (R)+Vs	03 (R)+Vs	03 (R)+Vs	03 (R)+Vs		
04	(B)GND	(B)GND	(B)GND	(B)GND	(B)GND		
<b>tET/tPET-P2C2</b> <b>tET/tPET-P2A2</b>		<b>tET/tPET-P2C2</b> <b>tET/tPET-P2A2</b>		<b>tET/tPET-P2POR2</b> <b>tET/tPET-P2P2</b>		<b>tET/tPET-P2POR2</b> <b>tET/tPET-P2P2</b>	
E1	Link/Act 10/100 M	14 N/A 13 N/A 12 N/A 11 DI1 10 DI0 09 DI.COM 08 DO1 07 DO0 06 DO.PWR 05 DO.GND	E1	Link/Act 10/100 M	14 N/A 13 N/A 12 N/A 11 RL1 COM 10 RL1 NO 09 RLO COM 08 RLO NO 07 DI1 06 DI0 05 DI.COM		
01	F.G. N/A	01 F.G. 02 N/A	01 F.G. 02 N/A	01 RL1 COM 10 RL1 NO 09 RLO COM 08 RLO NO 07 DI1 06 DI0 05 DI.COM			
03	(R)+Vs	03 (R)+Vs	03 (R)+Vs				
04	(B)GND	(B)GND	(B)GND				

### Dimensions (Unit: mm)

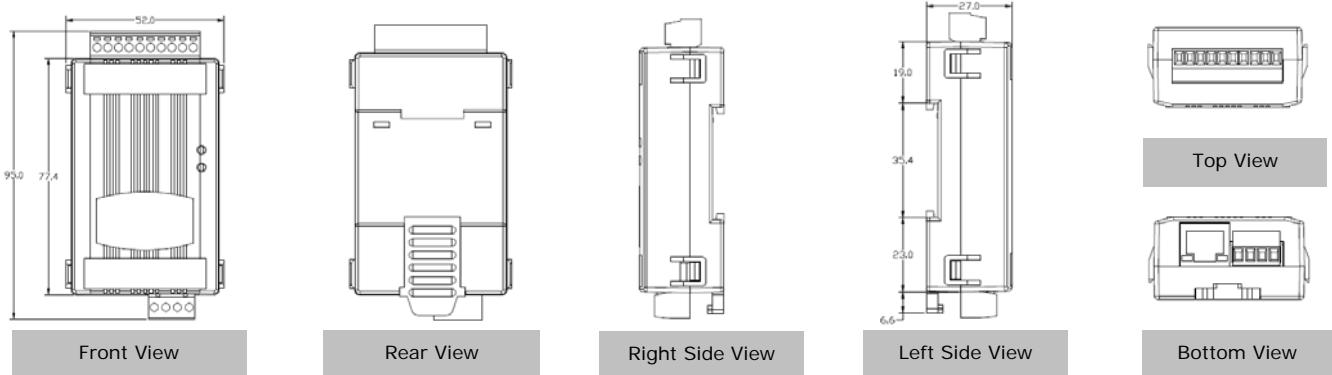


### Ordering Information

tET Series	
tET-P6 CR <small>(Available soon)</small>	Tiny Ethernet module with 6-ch DI (RoHS)
tET-C4 CR <small>(Available soon)</small>	Tiny Ethernet module with 4-ch DO (NPN, Sink) (RoHS)
tET-A4 CR <small>(Available soon)</small>	Tiny Ethernet module with 4-ch DO (PNP, Source) (RoHS)
tET-P2C2 CR <small>(Available soon)</small>	Tiny Ethernet module with 2-ch DI and 2-ch DO (NPN, Sink) (RoHS)
tET-P2A2 CR <small>(Available soon)</small>	Tiny Ethernet module with 2-ch DI and 2-ch DO (PNP, Source) (RoHS)
tET-P2POR2 CR <small>(Available soon)</small>	Tiny Ethernet module with 2-ch DI and 2-ch Form A PhotoMos relay (RoHS)
tET-P2R2 CR <small>(New)</small>	Tiny Ethernet module with 2-ch DI and 2-ch Form A relay (RoHS)
tPET Series	
tPET-P6 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, and 6-ch DI (RoHS)
tPET-C4 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, and 4-ch DO (NPN, Sink) (RoHS)
tPET-A4 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, and 4-ch DO (PNP, Source) (RoHS)
tPET-P2C2 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, 2-ch DI and 2-ch DO (NPN, Sink) (RoHS)
tPET-P2A2 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, 2-ch DI and 2-ch DO (PNP, Source) (RoHS)
tPET-P2POR2 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, 2-ch DI and 2-ch Form A PhotoMos relay (RoHS)
tPET-P2R2 CR <small>(New)</small>	Tiny Ethernet module with PoE, 2-ch DI and 2-ch Form A power relay (RoHS)


### Accessories

NS-205 CR	Unmanaged 5-Port Industrial Ethernet Switch (RoHS)
NS-205PSE CR	Unmanaged Ethernet Switch with 4 PoE Ports and 1 RJ-45 Uplink (RoHS)
NS-205PSE-24V CR	Unmanaged 5-Port 10/100 Mbps PoE (PSE) Ethernet Switch; 24 Vdc Input (RoHS)
DIN-KA52F CR	24 V/1.04 A, 25 W Power Supply with DIN-Rail Mounting (RoHS)
DIN-KA52F-48 CR	48 V/0.52 A, 25 W Power Supply with Din-Rail Mounting (RoHS, for NS-205PSE)
GPSU06U-6	24 V/0.25 A (max) Power Supply
NS-205 CR	
NS-205PSE CR	
NS-205PSE-24V CR	
DIN-KA52F CR	
DIN-KA52F-48 CR	
GPSU06U-6	


## 1 HMI and TouchPAD control (Poll) Remote DIO (modules)

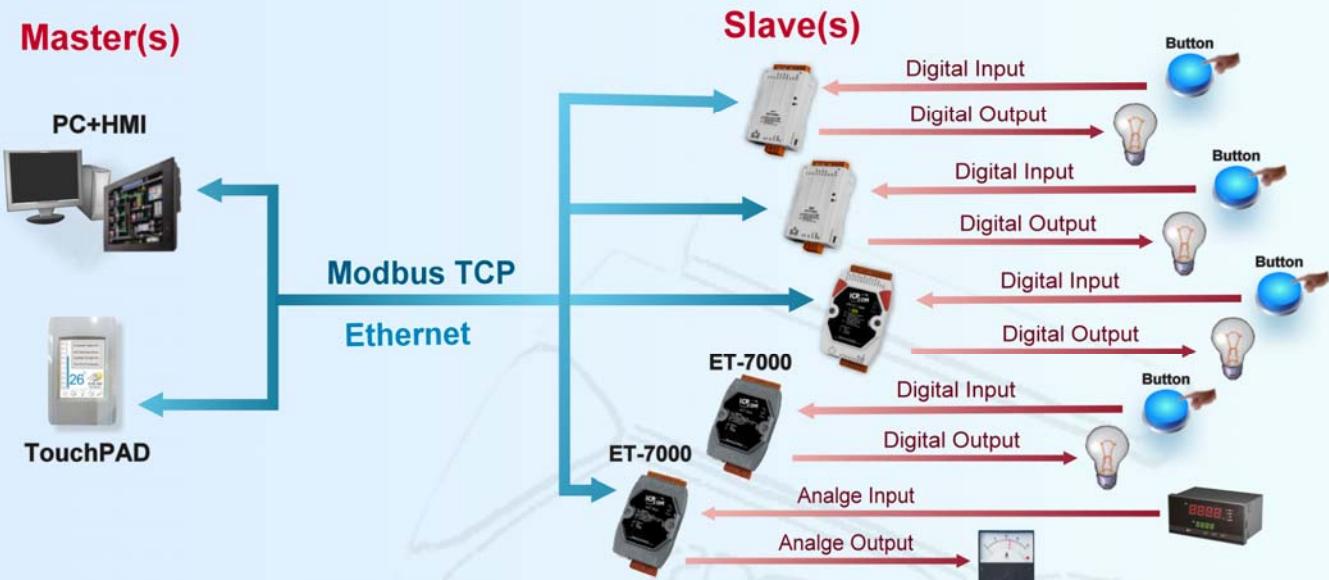


## 2 Module Pushes DI to Remote DO (Module or PLC)

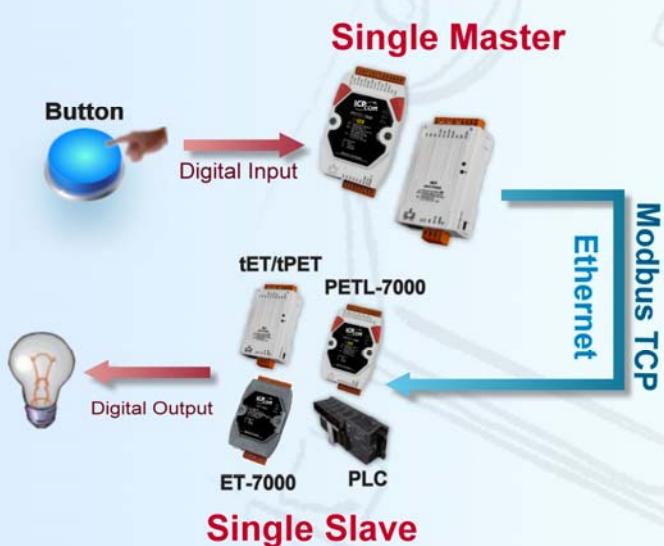


## 3 Multiple Modules Push DI to Remote DO (HMI or ET-7000)

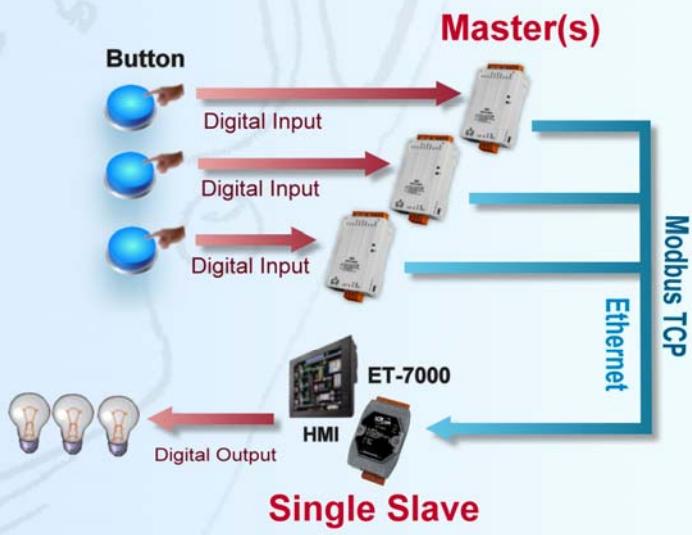

## 4 Push DI to Remote DO

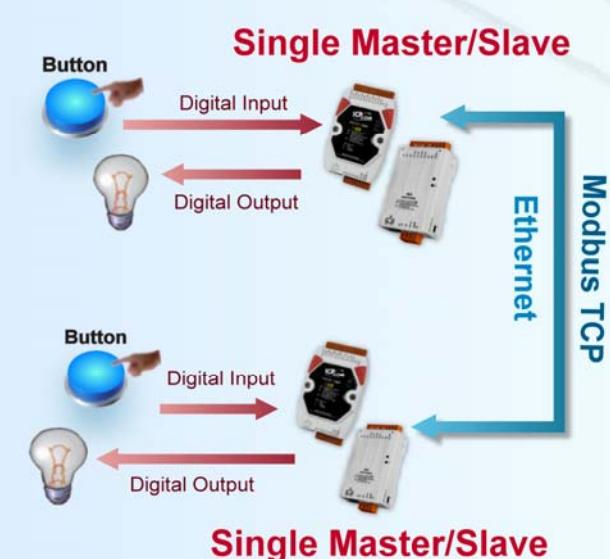

## 5 Multiple Modules Read/Write (Poll) DIO from/to Remote HMI/ET-7000

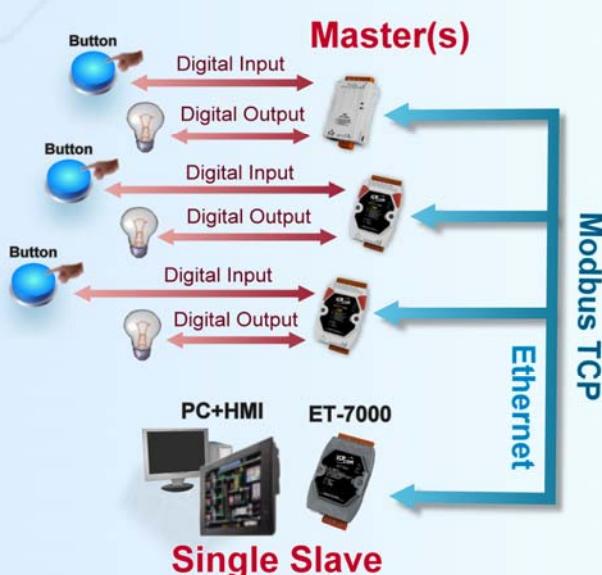

# **ICP DAS CO., LTD**

## **Taiwan**

Website: <http://www.icpdas.com>

E-mail: [sales @icpdas.com](mailto:sales@icpdas.com)

TEL: 886-3-597-3366 FAX: 886-3-597-3733

## **China**

Website: <http://www.icpdas.com.cn>

E-mail: [sales\\_sh @icpdas.com.cn](mailto:sales_sh@icpdas.com.cn)

TEL: 86-21-6247-1722 FAX: 86-21-6247-1725

## **Europe**

Website: <http://www.icpdas-europe.com>

E-mail: [info @icpdas-europe.com](mailto:info@icpdas-europe.com)

TEL: +49(0)7121-14324-0 FAX: +49(0)7121-14324-90

## **USA**

Website: <http://www.icpdas-usa.com>

E-mail: [sales @icpdas-usa.com](mailto:sales@icpdas-usa.com)

TEL: 1-310-517-9888 x101 FAX: 1-310-517-0998

## **Local Distributor**