







LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD
D		REVISED PER ECR-17-015775	02NOV2017	BDA	KR

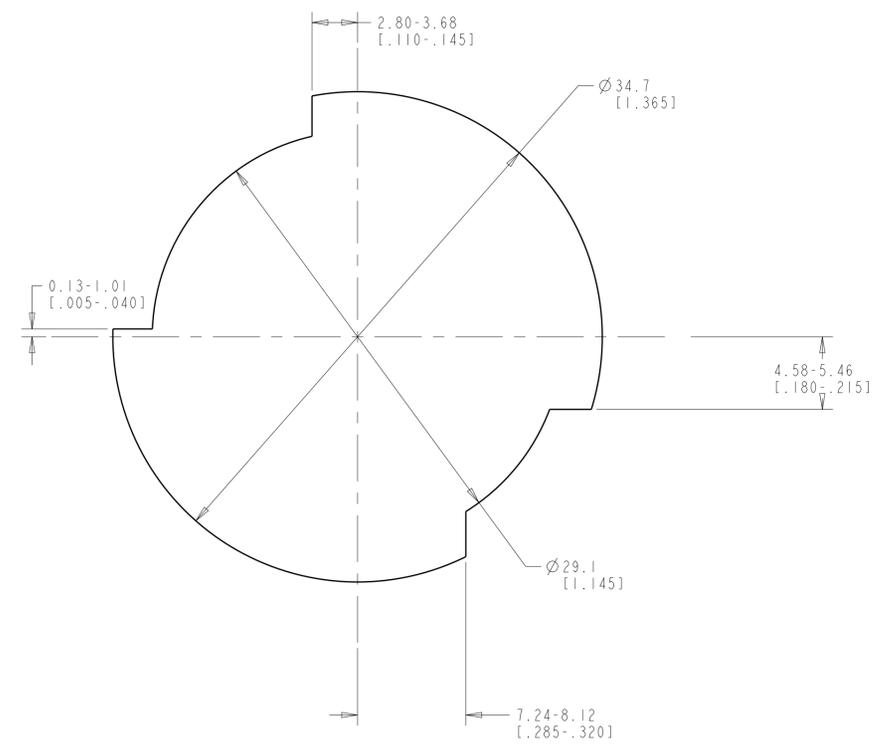

RECOMMENDED CUT OUT

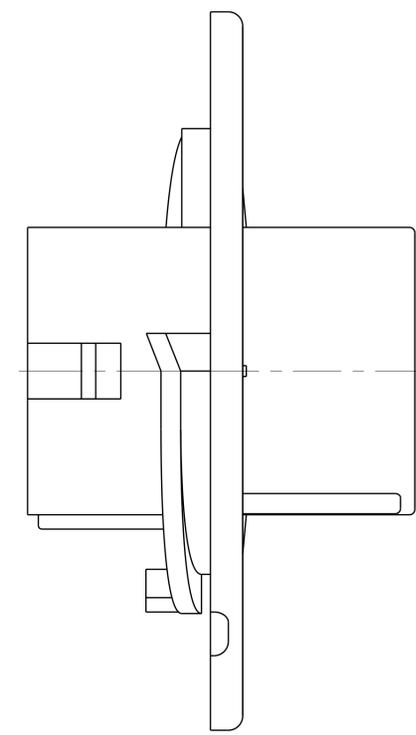

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
 - RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [0.030 - .090].
 - PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
 - FLAMMABILITY V-2 FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-11-10.
 - GLOW-WIRE FLAMMABILITY (GWF1) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
 - GLOW-WIRE FLAMMABILITY (GWF1) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
 - GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm, AND 3.0mm PER IEC 60695-2-13.
- ▲ UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN

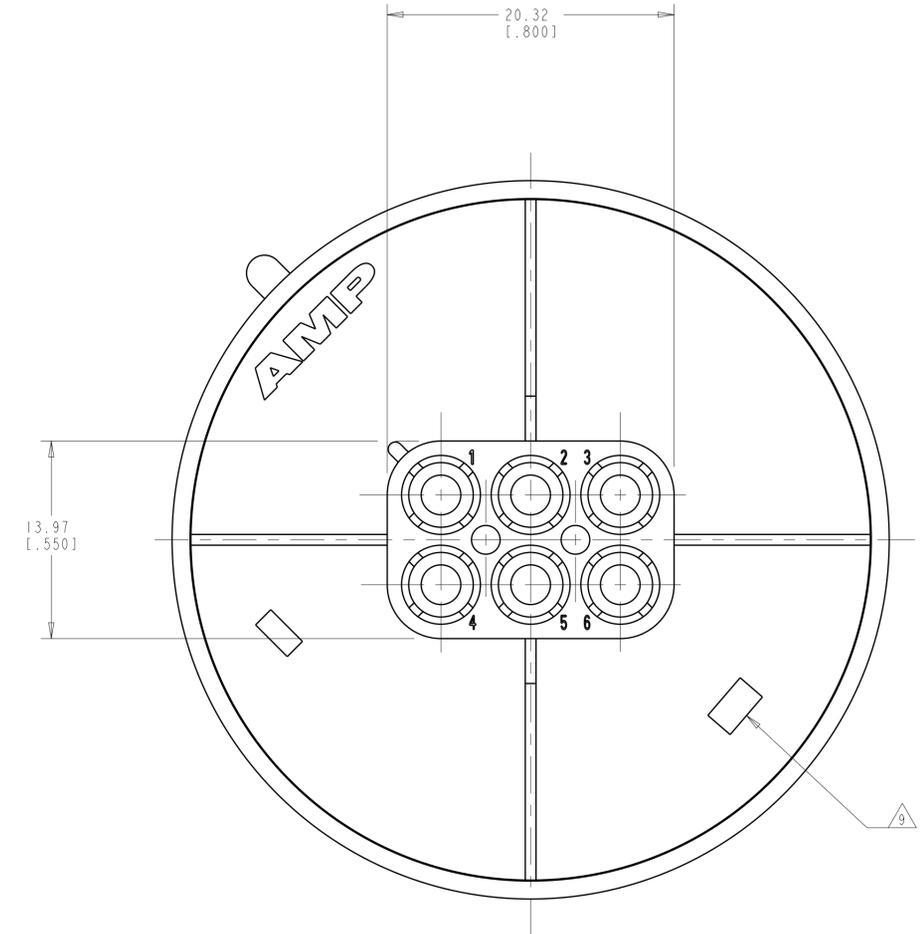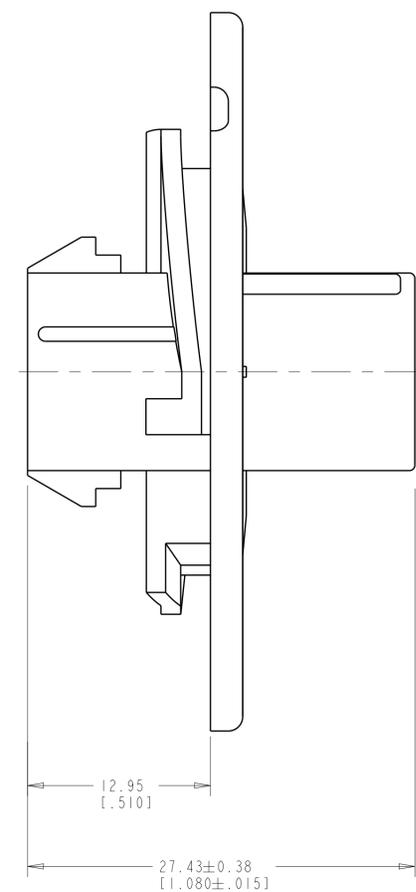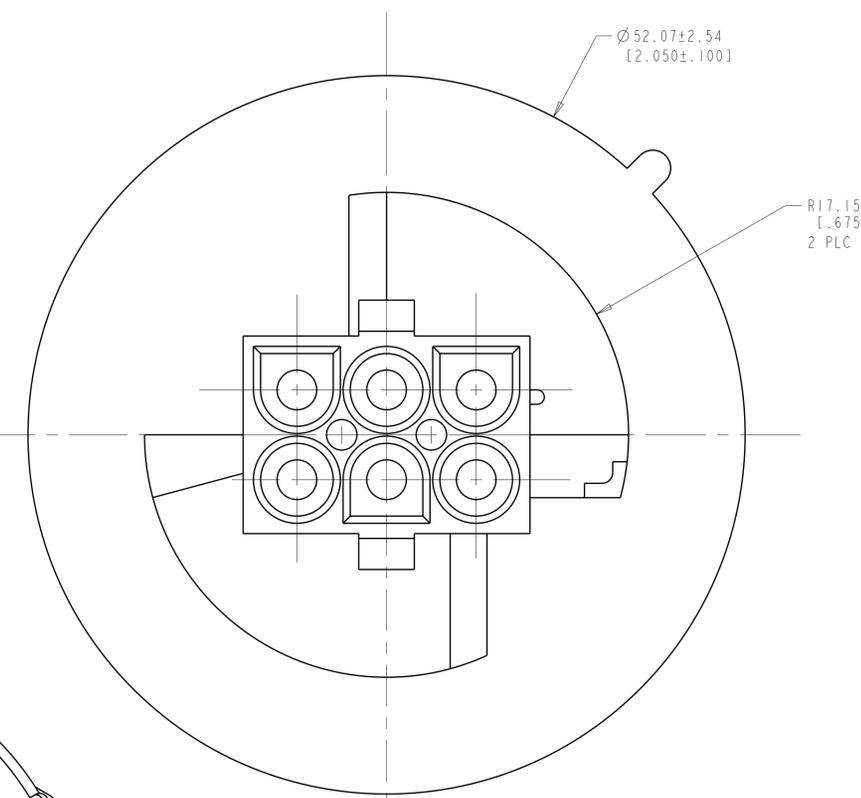

3-DIMENSIONAL MODEL
SCALE 2:1

0.460 IN ³	1586887-1
VOLUME	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. WHITAKER 07AUG2007	TE Connectivity CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK(TM), SPECIAL
DIMENSIONS: mm [INCHES]		CHK: D. COLEY 07AUG2007	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: D. COLEY 07AUG2007	NAME: CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK(TM), SPECIAL
0 PLC ±	1 PLC ±	PRODUCT SPEC	SIZE: A1
2 PLC ±0.511(.020)	3 PLC ±	APPLICATION SPEC	CAGE CODE: 00779
4 PLC ±	5 PLC ±	WEIGHT	DRAWING NO: 1586887
ANGLES ±	FINISH: 40° 30'	CUSTOMER DRAWING	SCALE: 4:1
MATERIAL: NYLON UL 94V-2, NATURAL			SHEET 1 OF 1