



314 CABLE ASSEMBLY

IEPE plug and play accelerometer cable assembly featuring 10-32 coaxial connector and BNC connector. Standard cable length is 120 inches. Mates with accelerometer models 7100A, 7104A, 7105A, 7108A, 7130A


FEATURES

- PFA Jacket
- PFA Insulated #30 AWG Conductors
- SPC Braided Shield
- 10-32 Coaxial Connector and BNC Connector
- -55°C to +200°C Temp Range


APPLICATIONS

- IEPE Accelerometers
- Laboratory Testing
- Vibration Monitoring
- General Purpose
- Shock Monitoring

DIMENSIONS

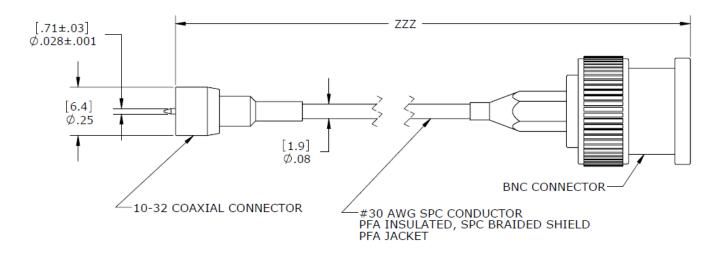

ORDERING INFORMATION

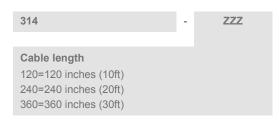

Example; 314-120

Model 314 cable, 120inch cable length (standard length typically in stock)

NORTH AMERICA

Measurement Specialties, Inc., a TE Connectivity Company Tel: 800-522-6752 customercare.akrn@te.com

EUROPE

MEAS France SAS a TE Connectivity Company Tel: +31 73 624 6999 customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd., a TE Connectivity Company Tel: 0400-820-6015 customercare.shzn@te.com

te.com/sensorsolutions

TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.

