

6

5


4

3

2

1

FRONT VIEW - FEMALE INSERT

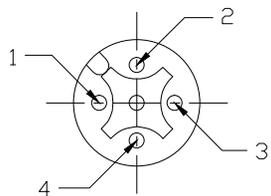


- 1 - RED
- 2 - RED/WHITE
- 3 - RED/BLACK
- 4 - GREEN

1.23 [31.2] REF.

4.0 [102] REF.

LENGTH
(SEE CHART)

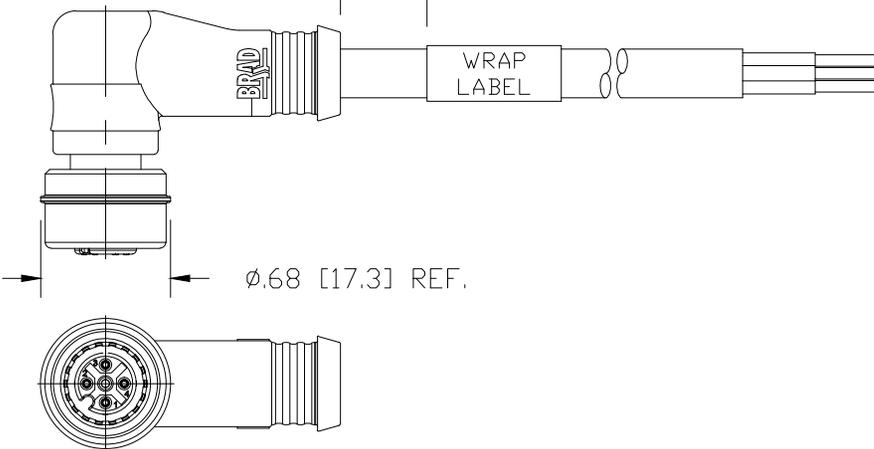

NOTES:

MATERIALS:

- CONTACTS: COPPER ALLOY, GOLD/NICKEL PLATING
- CONTACT CARRIER: NYLON, BLACK
- MOLDED BODY: PVC, YELLOW
- COUPLER: 316 STAINLESS STEEL
- INTERFACE O-RING: EPDM

ELECTRICAL:

- CURRENT RATING: 4AMP MAX
- VOLTAGE RATING: 250V

MECHANICAL:

- TEMPERATURE: -20° TO 80°C
- INGRESS PROTECTION: IP69K

CABLE SPECIFICATIONS:

- CABLE JACKET: PVC, YELLOW
- CONDUCTORS: #18/4, PVC

PART NUMBER	ENGINEERING NO.	LENGTH
1200790306	W04001A03M0208	6.56' +3.50" -0 [2.0M +89mm -0]

CUSTOMER PRODUCTION APPROVAL
 APPROVED BY: _____
 DATE: _____
 MUST BE SIGNED AND RETURNED BEFORE
 PRODUCTION WILL BEGIN.

RESTRICTED SALES DRAWING

UPDATE COLOR CODE EC NO: WEU2010-0539 DRWN: LHARTMAN 5/7/10 CHKD: TWOLDEGE APPR: JFMURPHY 2010/02/10	QUALITY SYMBOLS	DESCRIPTION
	$\nabla = 0$ $\sphericalangle = 0$	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	DIMENSION STYLE INCH ONLY
	SCALE 1:1 DESIGN UNITS INCH
	THIRD ANGLE PROJECTION
4 PLACES	mm INCH
3 PLACES	±--- ±---
2 PLACES	±--- ±.005
1 PLACE	±--- ±.010
	±--- ±.020
ANGULAR ±---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DRAWN BY DATE	LHARTMAN 2010/01/05
CHECKED BY DATE	TWOLDEGE 2010/01/15
APPROVED BY DATE	JFMURPHY 2010/02/10
MATERIAL NO.	SEE TABLE
SIZE	A

TITLE	
MICRO CHANGE ULTRA LOCK 4-POLE FEMALE 90DEGREE #18/4 YELLOW PVC CABLE	
MOLEX INCORPORATED	
DOCUMENT NO.	SD-120079-020
SHEET NO.	1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

6

5

4

3

2

1