PRODUCT DATASHEET C12362_STRADA-2X2-DWC

STRADA-2X2-DWC

Universal road lighting beam with excellent mixed illuminance and luminance uniformity. Typically IESNA Type III (medium).

SPECIFICATION:

Dimensions 50.0 x 50.0 mm

Height 6 mm

Fastening glue, pin, screw

ROHS compliant yes 1



MATERIALS:

ComponentTypeMaterialColourFinishSTRADA-2X2-DWCMulti-lensPMMAclear


ORDERING INFORMATION:

Component

C12362_STRADA-2X2-DWC » Box size: 480 x 280 x 300 mm **Qty in box MOQ MPQ Box weight (kg)** 800 160 160 5.8




PRODUCT DATASHEET C12362_STRADA-2X2-DWC

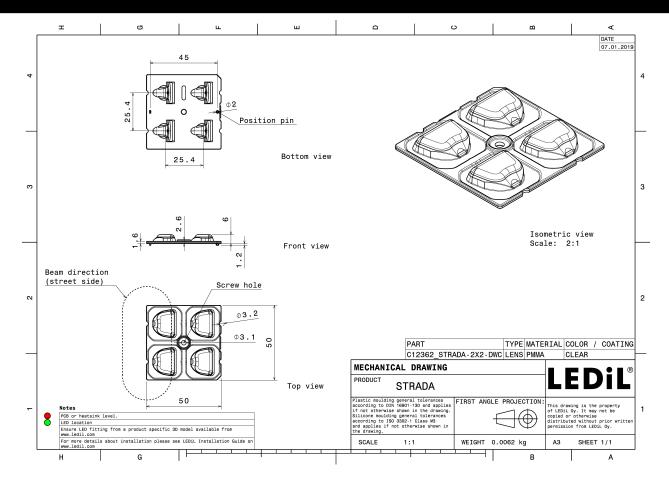

See also our general installation guide: www.ledil.com/installation_guide




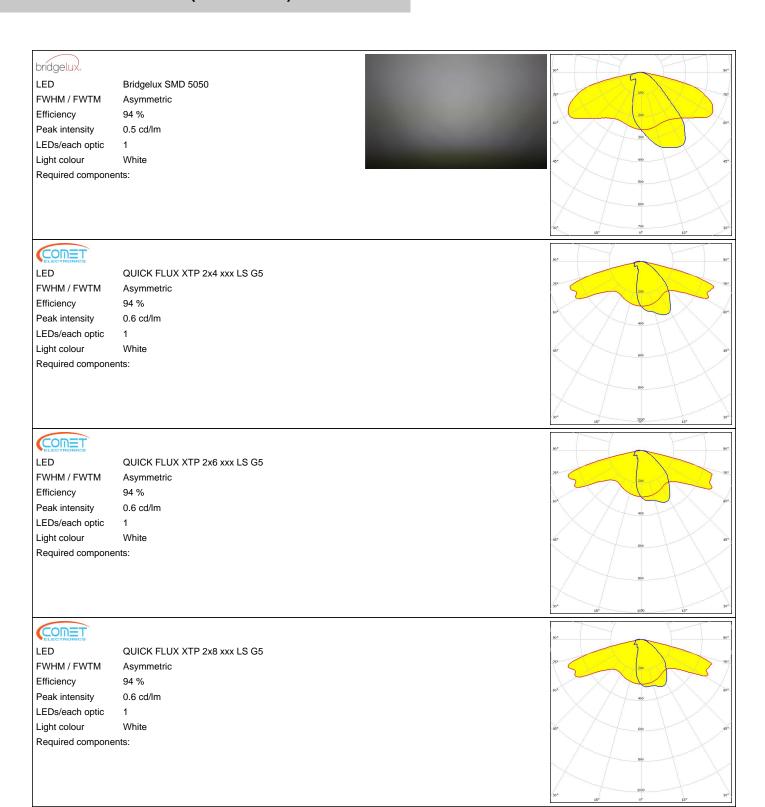




CREE \$\text{LED}

LED XD16
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 4
Light colour White
Required components:




CREE & LED

LED XD16
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CREE - LED

LED XHP35 HD
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:




CREE - LED

LED XM-L
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CREE \$\text{LED}

LED XM-L3
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

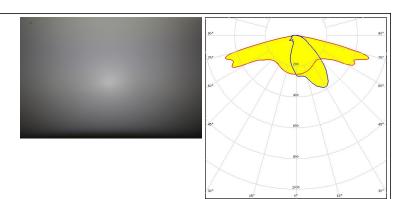


CREE & LED

LED XP-G
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

CREE - LED


LED XP-G2
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CREE - LED

LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17677_STRADA-2X2-SHD-BLK






CREE - LED

LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 91 %

Peak intensity 0.6 cd/lm LEDs/each optic 1

Light colour White Required components:


C17580_STRADA-2X2-SHD-WHT



CREE & LED

LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:




CREE - LED

LED XP-L HD FWHM / FWTM Asymmetric

Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1

Light colour White Required components:




CREE - LED

LED XP-L HI

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:





CREE \$\text{LED}


LED XP-L2

FWHM / FWTM Asymmetric Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White Required components:



CREE & LED

LED XT-

FWHM / FWTM Asymmetric

Efficiency 93 %


0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Peak intensity



CREE \$\text{LED}


LED XT-E HVW

FWHM / FWTM Asymmetric

Efficiency %

LEDs/each optic 1
Light colour White

Required components:



ELECTRIO DEN LED & HEATSING COMPANY

LEDs/each optic

LED EHP-2x8-3535


FWHM / FWTM Asymmetric

Efficiency 97 %

Peak intensity 0.5 cd/lm

Light colour White

Required components:








LED EHP-2x8-5050 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 97 % Peak intensity 0.4 cd/lm LEDs/each optic


Light colour White Required components:



LUMILEDS

LED LUXEON 5050 Round LES


FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour Required components:



LUMILEDS

LUXEON MZ LED $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic


Light colour White Required components:




MUMILEDS

LED LUXEON Q FWHM / FWTM Asymmetric 94 % Efficiency Peak intensity 0.7 cd/lm LEDs/each optic

White Light colour Required components:






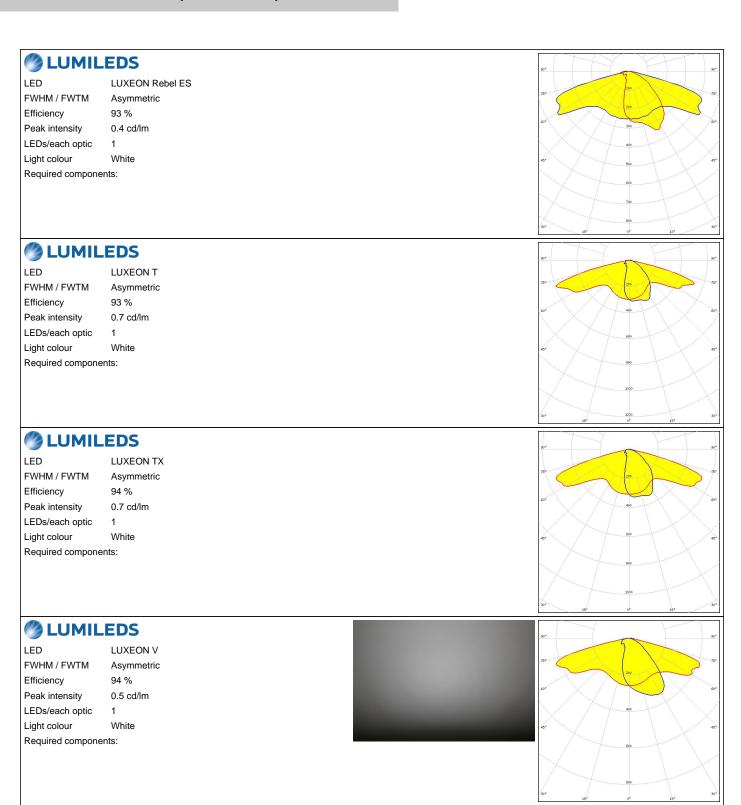





LED LUXEON V2
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White




Your solution

Required components:

LED RecLED 122x50mm 1900lm 730 2x4 Opt G1


FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



WNICHIA

LED NS9x383
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm


LEDs/each optic 1
Light colour White
Required components:



WNICHIA

LED NVSW219D
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1

Light colour White Required components:








LED NVSW219D FWHM / FWTM Asymmetric

Efficiency 86 %
Peak intensity 0.5 cd/lm


LEDs/each optic 1
Light colour White
Required components:



WNICHIA

LED NVSW319B
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm


LEDs/each optic 1
Light colour White
Required components:



WNICHIA

LED NVSW3x9A
FWHM / FWTM Asymmetric
Efficiency 94 %

Peak intensity 0.6 cd/lm LEDs/each optic 1
Light colour White Required components:




WNICHIA

LED NVSxE21A FWHM / FWTM Asymmetric

Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1

Light colour White Required components:






WNICHIA


LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



WNICHIA

LED NWSx229A
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White




OSRAM

Required components:

LED PL-BRICK HP 3800 2x8 SSG


FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



OSRAM

LED PrevaLED Brick HP 2x8

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:





OSRAM

LED Duris S8

FWHM / FWTM Asymmetric


Efficiency 88 %

Peak intensity 0.4 cd/lm

Light colour White Required components:

LEDs/each optic

Protective plate, glass



OSRAM


LED Duris S8 FWHM / FWTM Asymmetric

Efficiency 97 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

White Light colour Required components:




OSRAM Opto Semiconductors

OSLON Square CSSRM2/CSSRM3 LED

FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.7 cd/lm

LEDs/each optic Light colour White Required components:




OSRAM

LED OSLON Square PC

FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 0.6 cd/lm

LEDs/each optic White Light colour Required components:





OSRAM

LED OSLON Square PC

FWHM / FWTM Asymmetric

Efficiency 85 %


Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:


Protective plate, glass



PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+


FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:






PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4


FWHM / FWTM Asymmetric
Efficiency 94 %
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RC12 Z (LH181B)


FWHM / FWTM Asymmetric
Efficiency 99 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RH12 Z (LH351C)


FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RH16 (LH351C)

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:






SAMSUNG

HiLOM RM12 Z (LH502C)

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 96 % Peak intensity 0.4 cd/lm LEDs/each optic Light colour White


Required components:



SAMSUNG

LED HiLOM RM16 Z (LH502C)


FWHM / FWTM Asymmetric Efficiency 98 % Peak intensity 0.4 cd/lm LEDs/each optic 1 White Light colour Required components:



SAMSUNG

LED HiLOM RM8 Z (LH502C)


FWHM / FWTM Asymmetric Efficiency 97 % Peak intensity 0.4 cd/lm LEDs/each optic Light colour White Required components:



SAMSUNG

FWHM / FWTM Asymmetric Efficiency 89 % Peak intensity 0.6 cd/lm

LEDs/each optic White Light colour Required components:






SAMSUNG

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm

LEDs/each optic Light colour White


Required components:



SAMSUNG

LED LH351D FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.5 cd/lm

LEDs/each optic 1 White Light colour Required components:




SAMSUNG

LED LH351Z FWHM / FWTM Asymmetric Efficiency 94 %

Peak intensity 0.7 cd/lm LEDs/each optic

Light colour White Required components:




SAMSUNG

FWHM / FWTM Asymmetric

94 % Efficiency Peak intensity 0.5 cd/lm LEDs/each optic

White Light colour Required components:








LED LED-Pa-L15c2W11c2-xxx-C050-01


FWHM / FWTM Asymmetric Efficiency 97 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White Required components:



SEOUL SEOUL SEMICONDUCTOR

Acrich MJT 4040 LED FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic 1

White Light colour Required components:




LED **Z**5

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 93 % LEDs/each optic Light colour White Required components:




LED Z5M1/Z5M2 FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.7 cd/lm

LEDs/each optic White Light colour Required components:





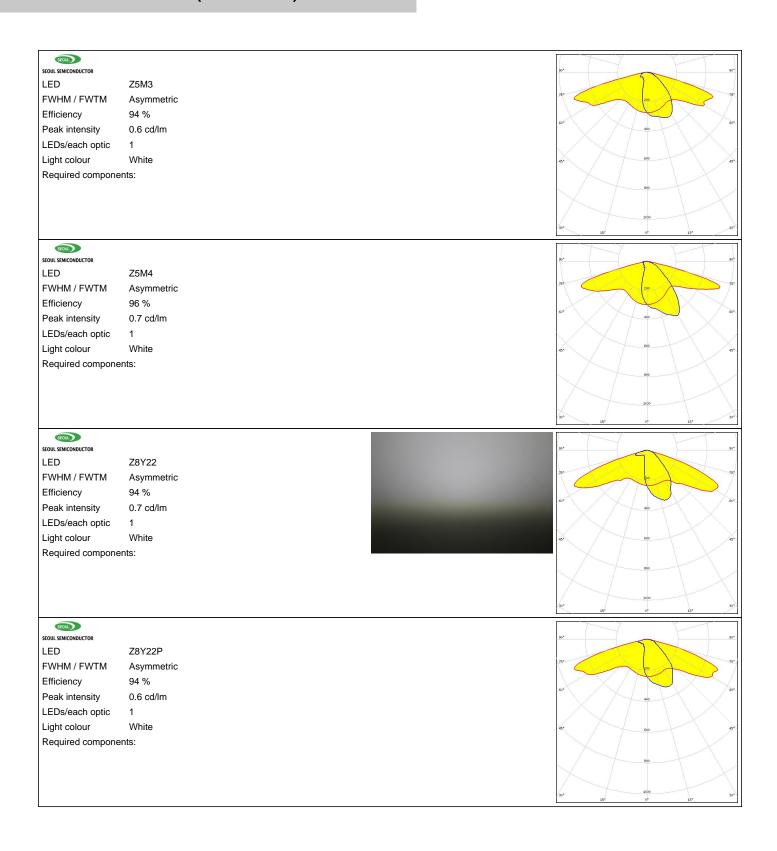




TOSHIBA

Leading Innovation

LED TL1L4
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC


LED RLE 2x4 2000lm HP EXC2 OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:






TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:





CREE - LED

LED J Series 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:


Protective plate, glass

CREE - LED

LED J Series 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:




CREE = LED

LED XHP35 HI
FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1

Light colour White

Required components:




CREE - LED

LED XM-L2 FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour White

Required components:







LED XP-G2


FWHM / FWTM Asymmetric Efficiency 84 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White Required components:

Protective plate, glass



CREE & LED

LED XP-G2

FWHM / FWTM Asymmetric


Efficiency 86 %
Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:

C17580_STRADA-2X2-SHD-WHT



CREE - LED

LED XP-G2 HE


FWHM / FWTM Asymmetric

Efficiency 92 %

Peak intensity 0.5 cd/lm LEDs/each optic 1

Light colour White

Required components:



CREE - LED

LED XP-G2 HE


FWHM / FWTM Asymmetric

Efficiency 82 %
Peak intensity 0.4 cd/lm

LEDs/each optic 1

Light colour White

Required components: C17580_STRADA-2X2-SHD-WHT





CREE - LED

LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 71 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

LEDs/each optic 1
Light colour White

Required components:

C17677_STRADA-2X2-SHD-BLK

Protective plate, glass

CREE - LED

LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass


CREE - LED

LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C17580_STRADA-2X2-SHD-WHT


Protective plate, glass



CREE & LED

LED XP-L2
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Protective plate, glass







LED XQ-E HD
FWHM / FWTM Asymmetric
Efficiency 89 %
LEDs/each optic 1
Light colour White
Required components:




MUMILEDS

LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:



Protective plate, glass


MILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C17580_STRADA-2X2-SHD-WHT




LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580_STRADA-2X2-SHD-WHT

Protective plate, glass






LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




MUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:




LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17677_STRADA-2X2-SHD-BLK




LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 72 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17677_STRADA-2X2-SHD-BLK

Protective plate, glass








LED LUXEON H50-2 FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour White


Required components:



LUMILEDS

LED LUXEON HL2X
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:




LUMILEDS

LED LUXEON HL2Z
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1

White

Light colour
Required components:




MUMILEDS

LED LUXEON HL2Z
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass







LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

57 59 59

MUMILEDS

LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)

FWHM / FWTM Asymmetric


Efficiency 78 %

Peak intensity 0.3 cd/lm

LEDs/each optic 1

Light colour White

Required components:



Protective plate, glass

Your solutions

LED RecLED 122x50mm 1900lm 730 2x4 Opt G1

FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1

Light colour White Required components:


Protective plate, glass

WNICHIA

Required components:

LED NV4WB35AM
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White



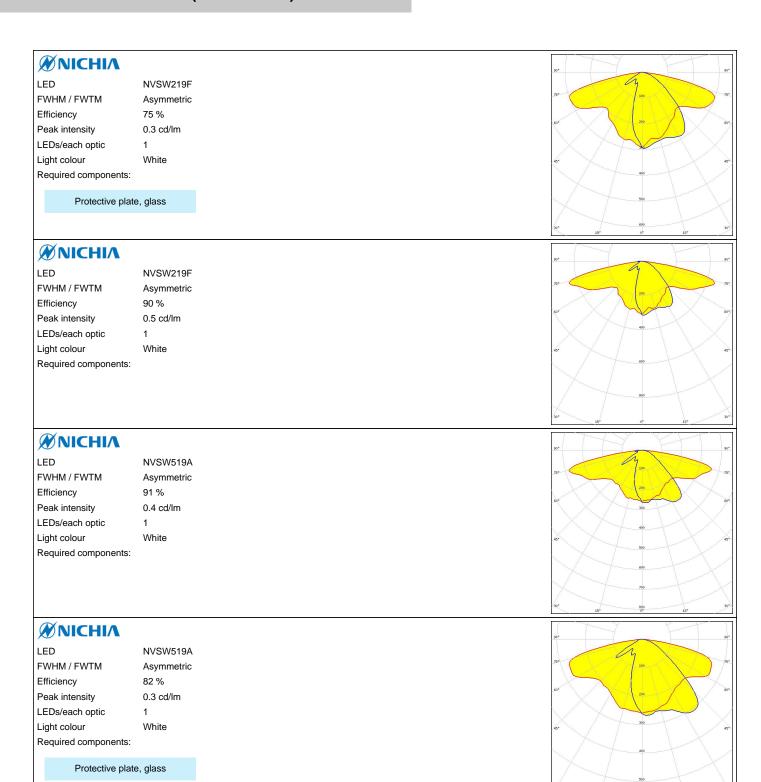






LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.5 cd/lm
LEDs/each optic 4
Light colour White


Required components:



WNICHIA

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.4 cd/lm
LEDs/each optic 4
Light colour White
Required components:

Protective plate, glass




WNICHIA

LED NVSxx19A
FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass




WNICHIA

Required components:

LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass






LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric Efficiency 78 % Peak intensity 0.4 cd/lm LEDs/each optic Light colour White Required components:

Protective plate, glass




OSRAM

LED OSCONIQ P 3737 (2W version)

FWHM / FWTM Asymmetric Efficiency 90 % Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour

Required components:




OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (2W version)

FWHM / FWTM Asymmetric Efficiency 80 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White

Protective plate, glass




OSRAM

Required components:

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 2.1 cd/lm LEDs/each optic White Light colour Required components:




OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580_STRADA-2X2-SHD-WHT



OSRAM


Opto Semiconductor

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 74 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components: C17580_STRADA-2X2-SHD-WHT

Protective plate, glass




OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass




OSRAM

Required components:

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components: C17580_STRADA-2X2-SHD-WHT




OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C17677_STRADA-2X2-SHD-BLK



OSRAM

Opto Semiconductor

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric

Efficiency 71 %

Peak intensity 0.4 cd/lm


LEDs/each optic 1

Light colour White

Required components:

C17677_STRADA-2X2-SHD-BLK

Protective plate, glass




DHIIIDS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM / FWTM Asymmetric
Efficiency 65 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C17677_STRADA-2X2-SHD-BLK




PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM / FWTM Asymmetric
Efficiency 69 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580_STRADA-2X2-SHD-WHT






PHILIPS

LED Fortimo FastFlex LED 2x8 DA HE

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass




PHILIPS

Required components:

LED Fortimo FastFlex LED 2x8 DA HE

FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:




SAMSUNG

LED HILOM RH12 Z (LH351C)

FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass




SAMSUNG

Required components:

LED HILOM RM8 Z (LH502C)

FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass






SAMSUNG

LED LH181B
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.4 cd/lm
LEDs/each optic 4
Light colour White

Required components:




SAMSUNG

LED LH351B
FWHM / FWTM Asymmetric
Efficiency 69 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17677_STRADA-2X2-SHD-BLK


Protective plate, glass



SAMSUNG

LED LH351B
FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




SAMSUNG

Required components:

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass





SAMSUNG

LM301B FWHM / FWTM Asymmetric

Efficiency 80 %

Peak intensity 0.4 cd/lm

LEDs/each optic Light colour White

Required components:

Protective plate, glass

SAMSUNG

LED LM301B

FWHM / FWTM Asymmetric Efficiency 91 %


Peak intensity

0.4 cd/lm

LEDs/each optic 4 Light colour

White

Required components:



SEOUL

LED MJT 5050

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 92 %


Peak intensity 0.4 cd/lm

LEDs/each optic 1

Required components:

Light colour

White



SEOUL SEOUL SEMICONDUCTOR


LED SEOUL DC 5050 6V

FWHM / FWTM Asymmetric


94 % Efficiency Peak intensity 0.4 cd/lm

LEDs/each optic White Light colour

Required components:





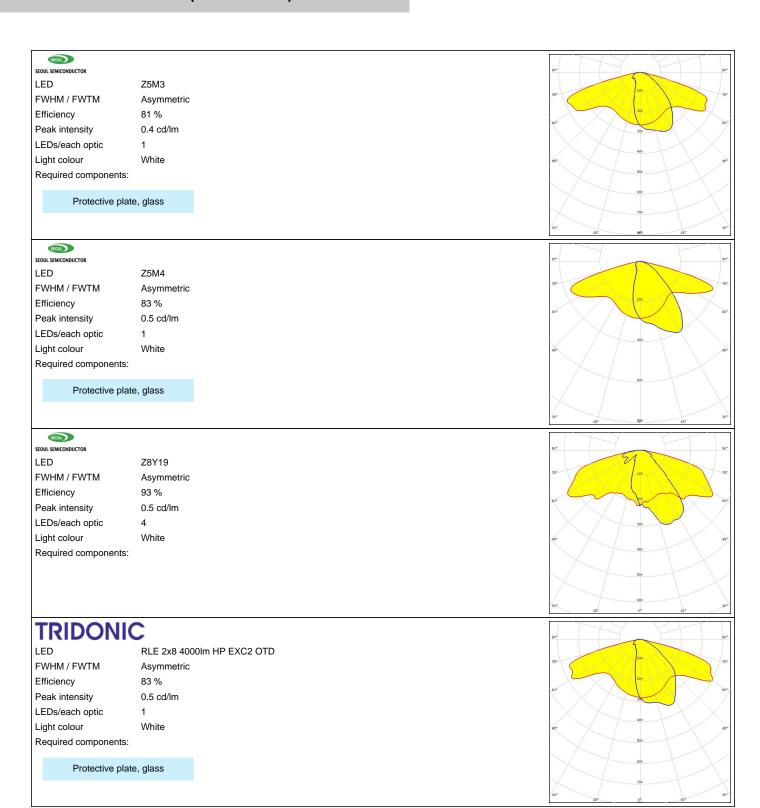



PRODUCT DATASHEET C12362 STRADA-2X2-DWC

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

38/38

www.ledil.com/ where_to_buy