


## CDBT0230-HF

**Reverse Voltage: 30 Volts**

**Forward Current: 200 mA**

**RoHS Device**

**Halogen Free**





### Features

- Small surface mounting type.
- Low  $I_{R}$ . ( $I_{R}=10\mu A$  Typ.)
- High reliability.

### Mechanical data

- Case: SOT-23, molded plastic.
- Terminals: Solderable per MIL-STD-750, method 2026.

### Circuit diagram

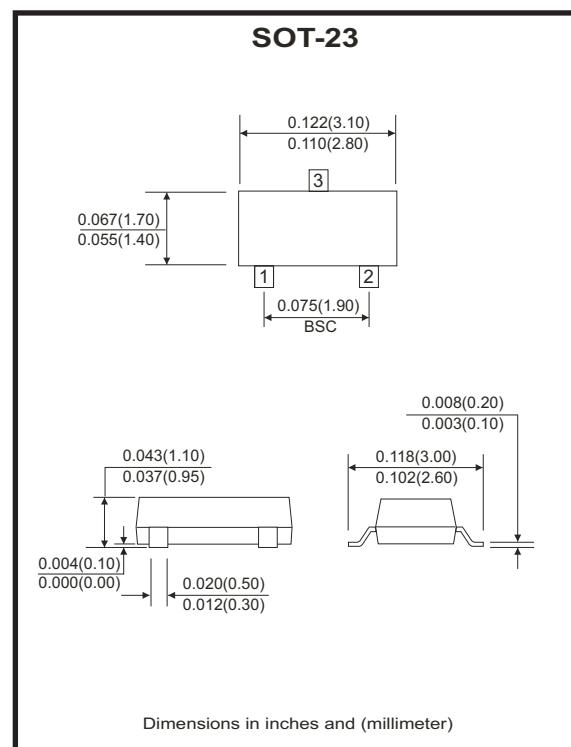

### Maximum Ratings and Electrical Characteristics

(at  $T_a=25^\circ C$  unless otherwise noted)

Parameter	Symbol	Value	Units
Maximum recurrent peak reverse voltage	$V_{RRM}$	30	V
Maximum RMS voltage	$V_{RMS}$	21	V
Maximum DC blocking voltage	$V_{DC}$	30	V
Maximum average forward rectified current	$I_o$	0.2	A
Peak forward surge current at 8.3m sec single half sine-wave	$I_{FSM}$	3.0	A
Maximum instantaneous forward voltage at $I_f=0.2A$	$V_F$	0.5	V
Maximum average reverse current at $V_R(1)=30V$	$I_{R(1)}$	5	$\mu A$
Maximum average reverse current at $V_R(2)=10V$	$I_{R(2)}$	1	$\mu A$
Typical junction capacitance between terminal (Note 1)	$C_J$	40	pF
Maximum operating temperature range	$T_J$	-55 to +125	$^\circ C$
Storage temperature range	$T_{STG}$	-55 to +125	$^\circ C$

Notes: 1. Measured at 1.0MHz and 0 reverse bias voltage.  
2. ESD sensitive product handling required.

Company reserves the right to improve product design, functions and reliability without notice.

REV: B

# Small Signal Schottky Diodes

**Comchip**  
SMD Diode Specialist

## RATING AND CHARACTERISTIC CURVES (CDBT0230-HF)

Fig.1 - Forward Characteristics

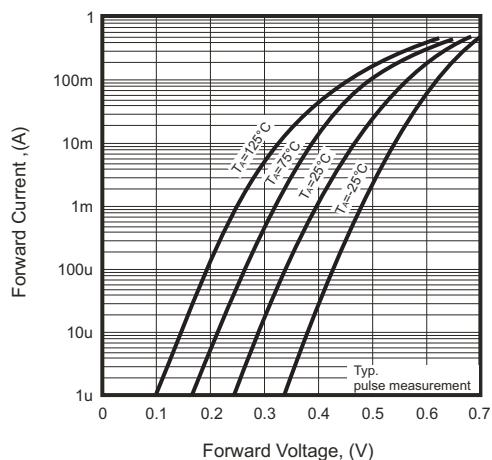


Fig.2 - Reverse Characteristics

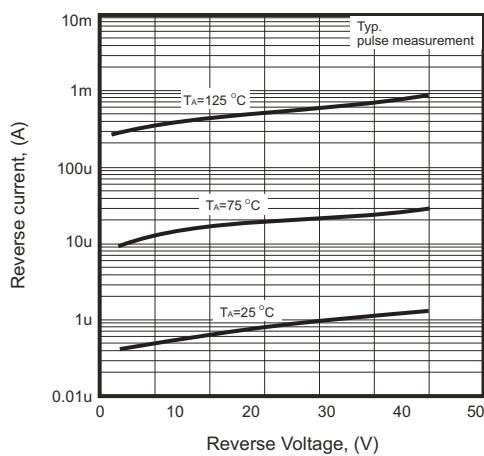


Fig.3 - Typical Junction Capacitance






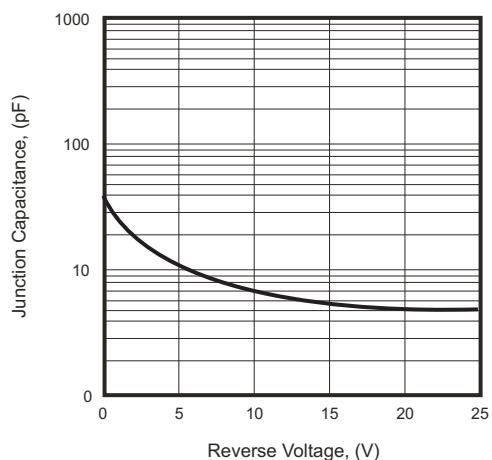


Fig.4 - Forward Power Dissipation Characteristics

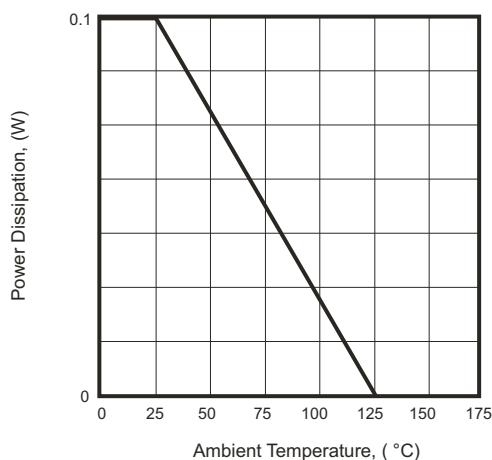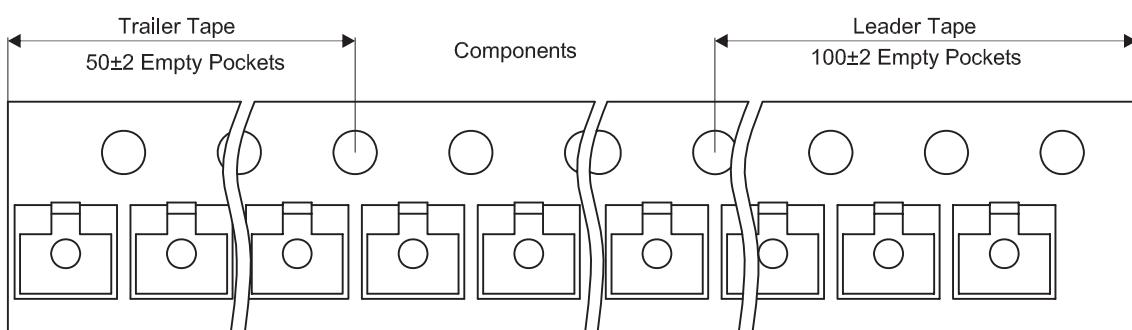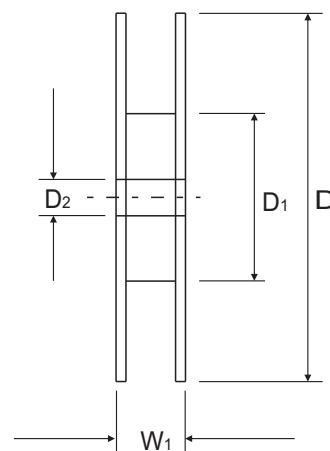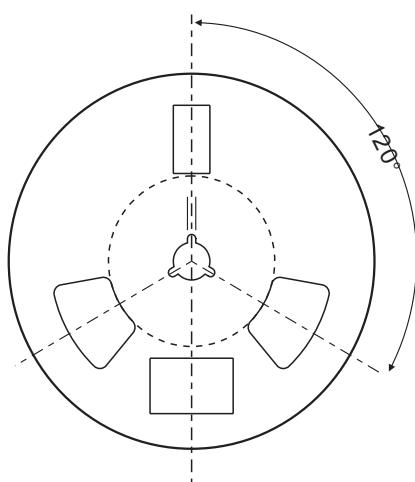

## Reel Taping Specification

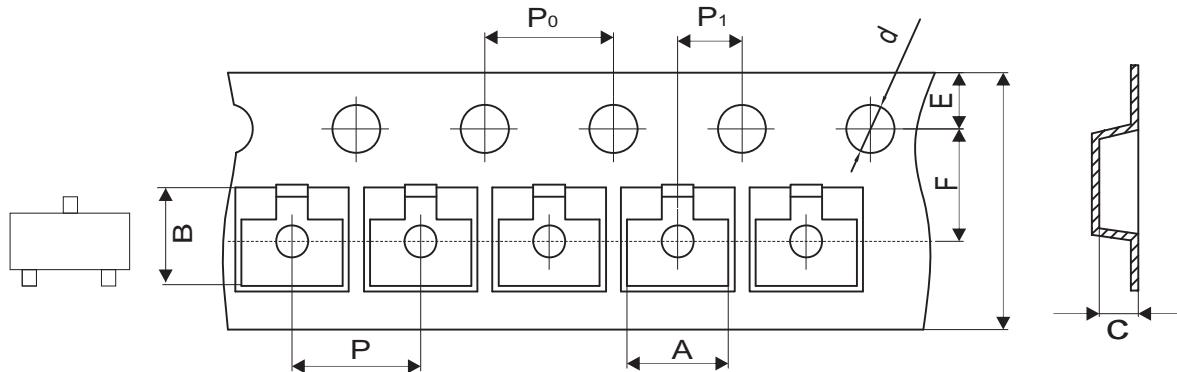

SOT-23	SYMBOL	A	B	C	d	D	D <sub>1</sub>	D <sub>2</sub>
	(mm)	$3.15 \pm 0.10$	$3.15 \pm 0.10$	$1.30 \pm 0.10$	$1.55 \pm 0.05$	$180.00 \pm 0.00$ $- 3.00$	$60.00 \pm 1.00$ $- 0.40$	$13.00 \pm 0.20$
	(inch)	$0.124 \pm 0.004$	$0.124 \pm 0.004$	$0.051 \pm 0.004$	$0.061 \pm 0.002$	$7.087 \pm 0.000$ $- 0.118$	$2.362 \pm 0.039$ $- 0.016$	$0.512 \pm 0.008$

SOT-23	SYMBOL	E	F	P	P <sub>0</sub>	P <sub>1</sub>	W	W <sub>1</sub>
	(mm)	$1.75 \pm 0.10$	$3.50 \pm 0.05$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.05$	$8.00 \pm 0.20$	$11.40 \pm 1.00$
	(inch)	$0.069 \pm 0.004$	$0.138 \pm 0.002$	$0.157 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.002$	$0.315 \pm 0.008$	$0.449 \pm 0.039$

Company reserves the right to improve product design , functions and reliability without notice.


REV: B

QW-JA003

Page 3

## Marking Code


Part Number	Marking Code
CDBT0230-HF	05H

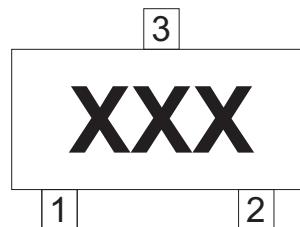

**xxx = Product type marking code**

## Suggested PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	1.90	0.075
D	2.20	0.087
E	3.10	0.122

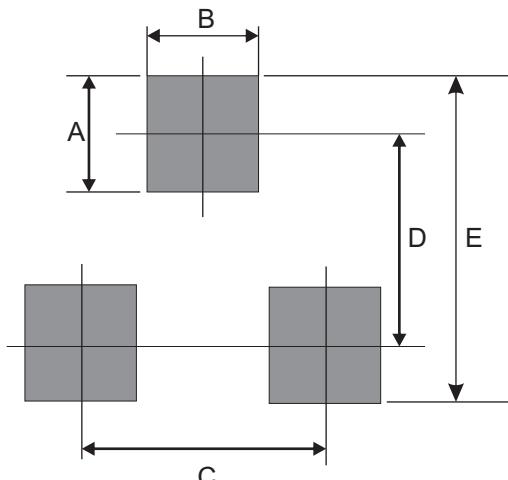

## Standard Packaging

Case Type	Qty Per Reel	Reel Size
	(Pcs)	(inch)
SOT-23	3,000	7