

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

2005, Projects Unlimited Inc.

## **SPECIFICATIONS**

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE RANGE	9 ~ 18	Vdc
TONE OUTPUT	SEE 32 TONE CHART	_
CURRENT CONSUMPTION (NOMINAL)	SEE 32 TONE CHART	mA
INGRESS PROTECTION	IP54 <u></u>	1
LENS COLOR	BLUE	-
FLASH RATE	1	PER/SECOND
CASE MATERIAL/COLOR	ABS/WHITE	_
TERMINAL	SCREW	-
OPERATING TEMPERATURE	−10 ~ +55	.c
WEIGHT	300	grams






OPTIONAL BASES DEEP BASE: AWA-DBW U BASE: AWA-UBW

120Vac BASE: AWA-DBW-120

	/- ø92
⊕	91
	<u>.t.</u> [

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
_	RELEASED FROM ENGINEERING	12/16/05	
Α	ADDED RoHS & BASE NOTES	5/21/07	R.W.
В	REVISED DETAIL "A" DIL SWITCH	3/12/09	B.R.

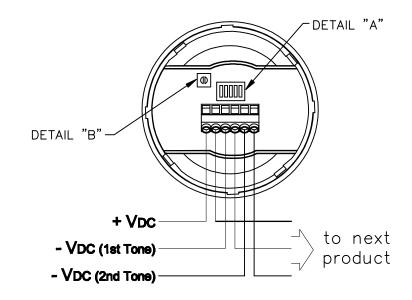

(2nd Tone overrides 1st Tone)

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
- 4. IP65 WITH USE OF AWA-DBW, AWA-DBW-120, OR AWA-UBW BASE.

FILE NAME AVW-15SBW-BL-12.DWG

