


-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.13-IPXLK-SAFGT-6IN (4 INCHES)
 CB1.13-IPXLK-SAFGT-10IN (10 INCHES)

REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		PRODUCTION RELEASE	M. LARSEN	07/18/2022

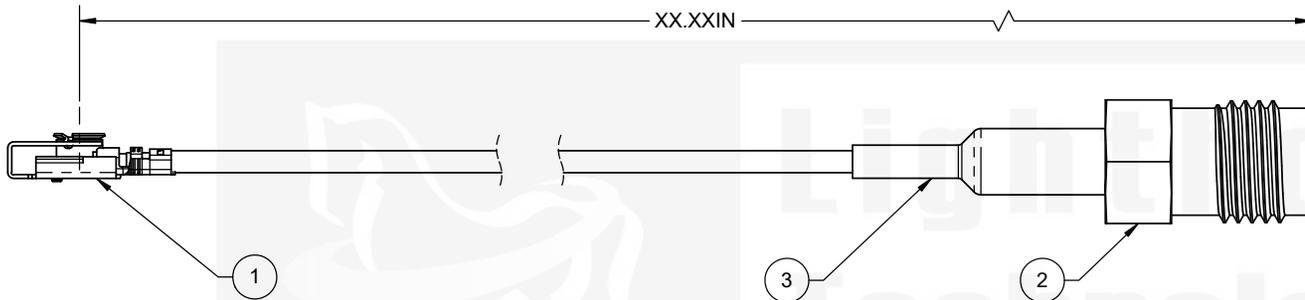

SCALE: NONE

ITEM	PART NUMBER	DESCRIPTION	QTY
1	CB1.13-2IPXLK-500MM	IPXLK (MHF1 LK) LOCKING, RHT ANGLE, JACK, CABLE CRIMP (I-PEX 20278-112R-13)	0.5
2	SASF11GT-316	SMA, STRAIGHT, JACK, CABLE CRIMP	1
3	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING			Lighthouse Technologies San Diego, CA WWW.RFCCONNECTOR.COM	
TOLERANCES UNLESS OTHERWISE SPECIFIED			TITLE: CABLE ASSEMBLY, IPXLK (MHF1 LK) LOCKING R/A JACK, CRIMP TO SMA JACK, CRIMP USING 1.13 MICRO COAX	
DIMENSIONS ARE IN MILLIMETERS		 THIRD ANGLE PROJECTION	SIZE	REV
X = ±0.5 XX = ±0.25 XXX = ±0.13 ANGLE = ±30°			B	A
CUSTOMER APPROVAL		PART/DWG. NO:		
SIGN / DATE:		CB1.13-IPXLK-SAFGT-xxIN		
ENG APPR.	P. BURDGE 07/18/2022	SCALE: 2:1	FILE NAME	SHEET 1 OF 1
CHECKED	M. HELD 07/18/2022			
DRAWN	M. LARSEN 07/18/2022			
NAME	DATE			

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHORSE TECHNOLOGIES. LIGHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.



6

5

4

3

2

1