
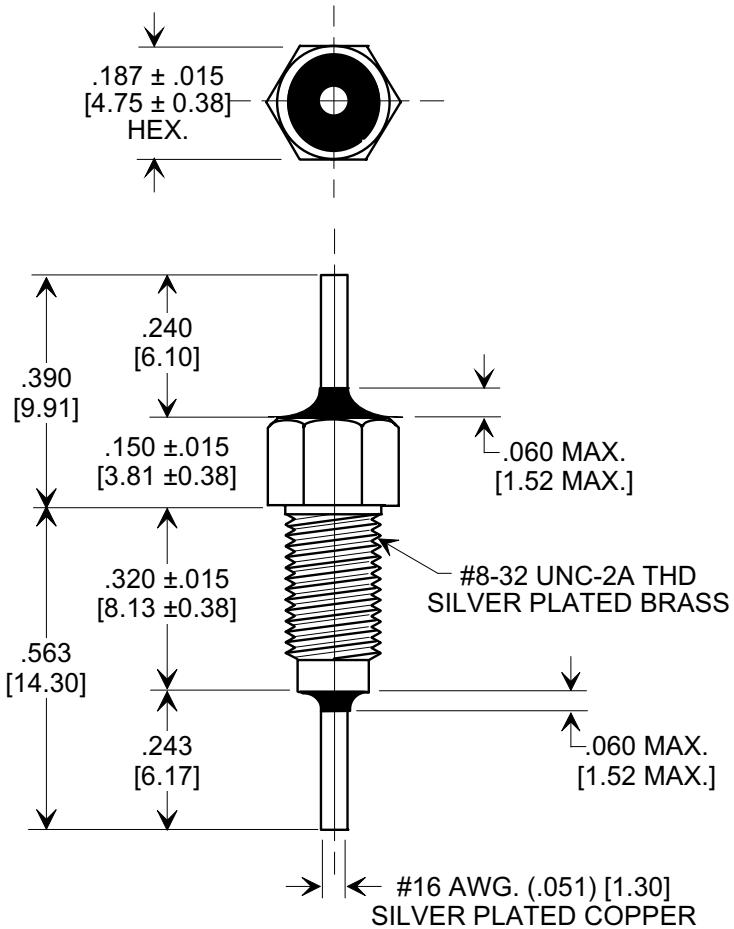



**Electrical Testing
per Tucsonix standard
test plans and Mil-Std-202
Test Methods.**

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

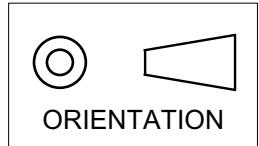

SPECIFICATIONS

Tusonix Style:	2425-601
Capacitance Value:	10,000 pF
Capacitance Tolerance:	+80 / -20%
Temp. Characteristic:	X5W
Rating:	200 VDC @ + 85°C / 100 VDC @ +125°C
Current (A):	20
Operating Range:	-55°C TO +125°C
Insulation Resistance:	10,000 megohms (min.) @ +25°C
DWV @ 2 Sec. Min:	600 VDC

NOTES:

1. SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
 2. TUSONIX STANDARD PART NUMBER:
2425-601-X5W0-103Z..
TUSONIX RoHS COMPLIANT PART NUMBER: 2425-601-X5W0-103Z LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
 3. PART MARKING: STANDARD BLACK INK FOR TRADEMARK AND CAP CODE.
RoHS PART: GREEN TRADEMARK AND CAP CODE.
 4. MOUNTING TORQUE NOT TO EXCEED 5 lb - in. MAX. [.565 N-m]

X-2015 Rev-0		REVISION RECORD	
Original Release C.O.	19991022-14-01	0	
TUSONIX STYLE, CURRENT (A), DWV COLUMNS ADDED & NOTE 2 & DIMS REVISED L.E. 05-27-04			
20040514-3-17	1		
ADDED NOTES 2 & 3. S.M. 08-26-05			
20050826-1-01	2		
		--TOLERANCES-- Unless Otherwise Specified	Title
		DECIMAL \pm .031 [0.79]	
		ANGLES \pm //	Drawn S.M. 10-22-99 Scale 3 X
			Approved B.M. 10-22-99
		TUSONIX TUCSON, ARIZONA	A 2425-601-X5W0-103Z