



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-008761	10JUN2014	DM	DM
	A1	REVISED PER PCN E-19-014642	16OCT2019	JA	IG



SCALE 1:2

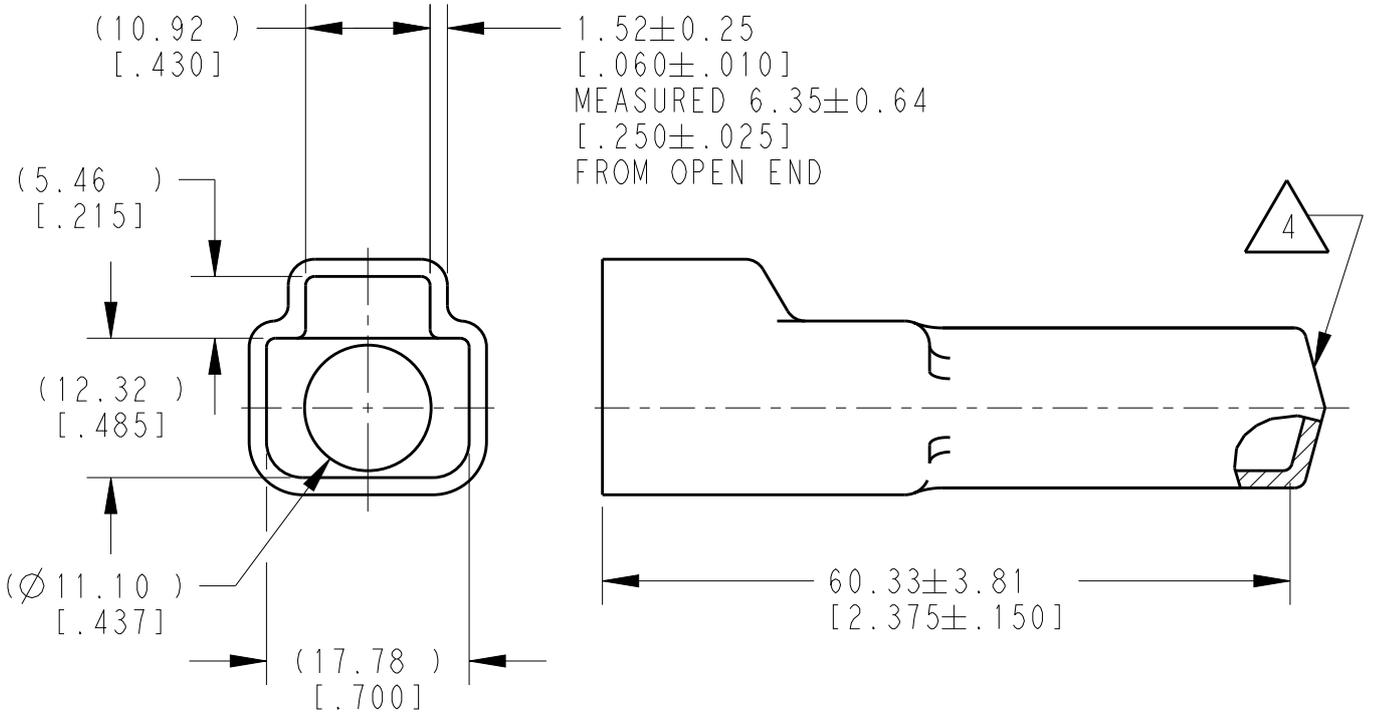

- 4 SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND.
3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.
2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F].
1. THIS PART IS USED ON DT06-4S PLUG WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

NOTES:

TE INTERNAL PN	DEUTSCH PN
DT4S-BT	DT4S-BT

2019 RELEASED FOR PUBLICATION ALL RIGHTS RESERVED. BY TE CONNECTIVITY. THIS DRAWING IS UNPUBLISHED. COPYRIGHT 2014

DIMENSIONS: MM [INCH]	DWN D. MEYER	10JUN2014	MATERIAL PVC	FINISH GRAY			
	CHK R. MESSENGER	10JUN2014	TE Connectivity				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.63 [.025] 3 PLC ± 4 PLC ± ANGLES ±5°	APVD D. MEYER	10JUN2014			NAME BOOT, PLUG, 4 PIN DT SERIES		
	PRODUCT SPEC	APPLICATION SPEC	SIZE A 4	CAGE CODE 4AFU8	DRAWING NO C-DT4S-BT	RESTRICTED TO -	
WEIGHT 5.22g		CUSTOMER DRAWING			SCALE 3:2	SHEET 1 OF 1	REV A1