

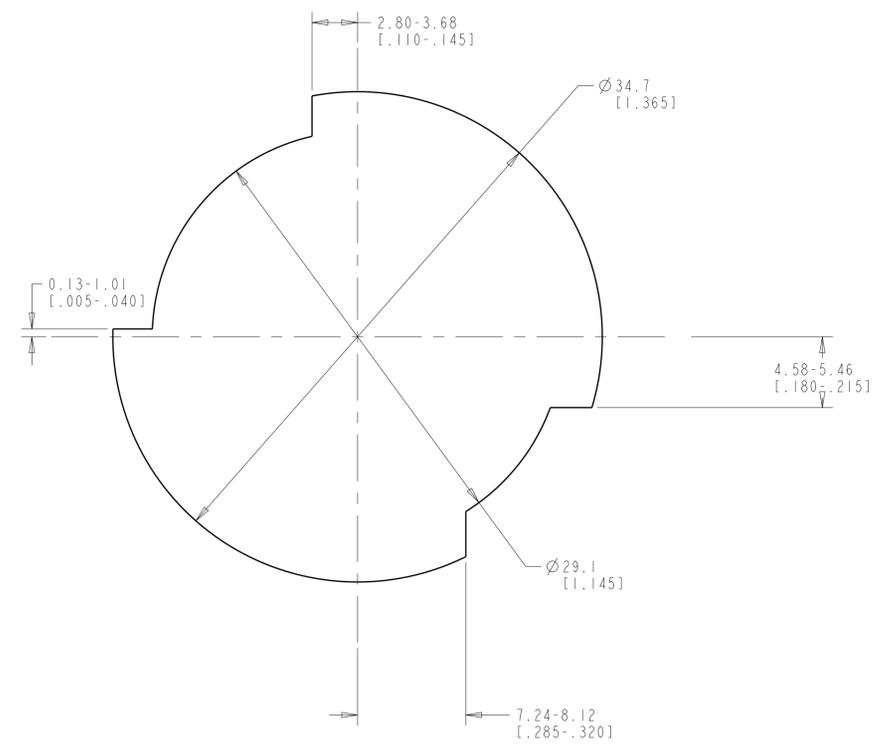
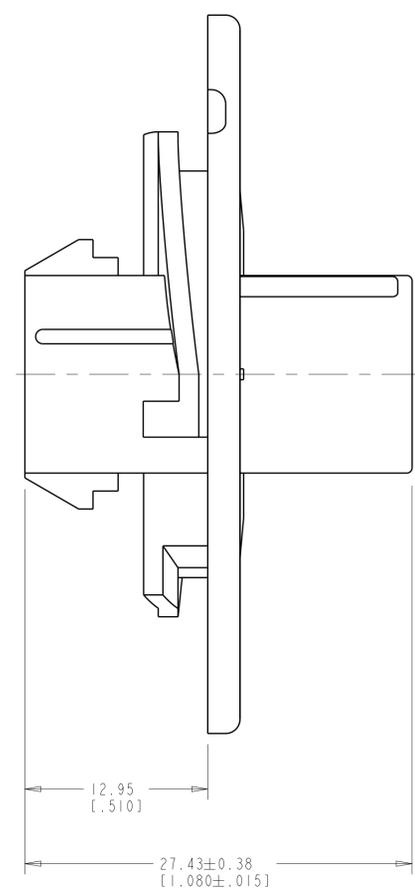



LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	DWN	APVD
CM	00	F		REVISED PER ECR-17-015775	03NOV2017	BDA	KR

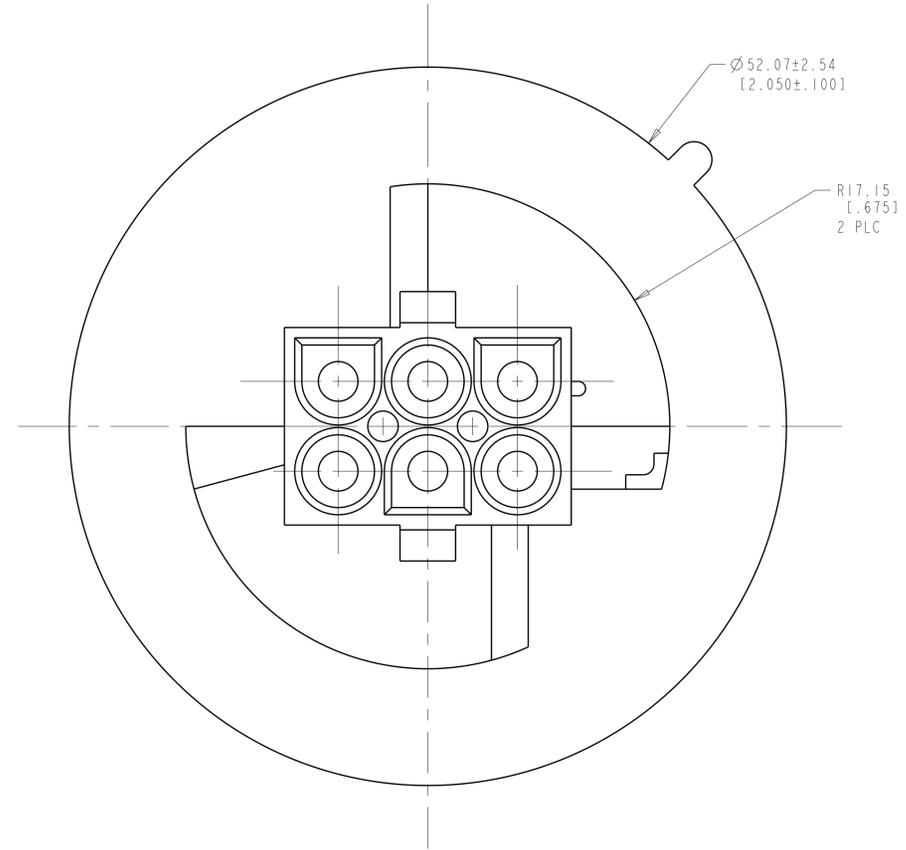


RECOMMENDED CUT OUT

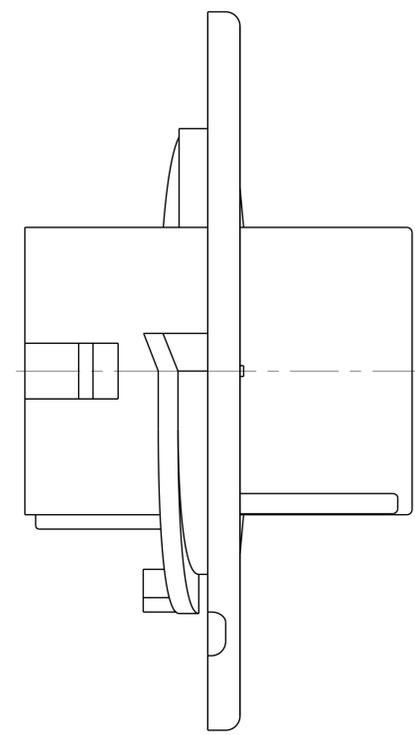

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
 - RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [.030 - .090].
 - PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- ⚠ UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN

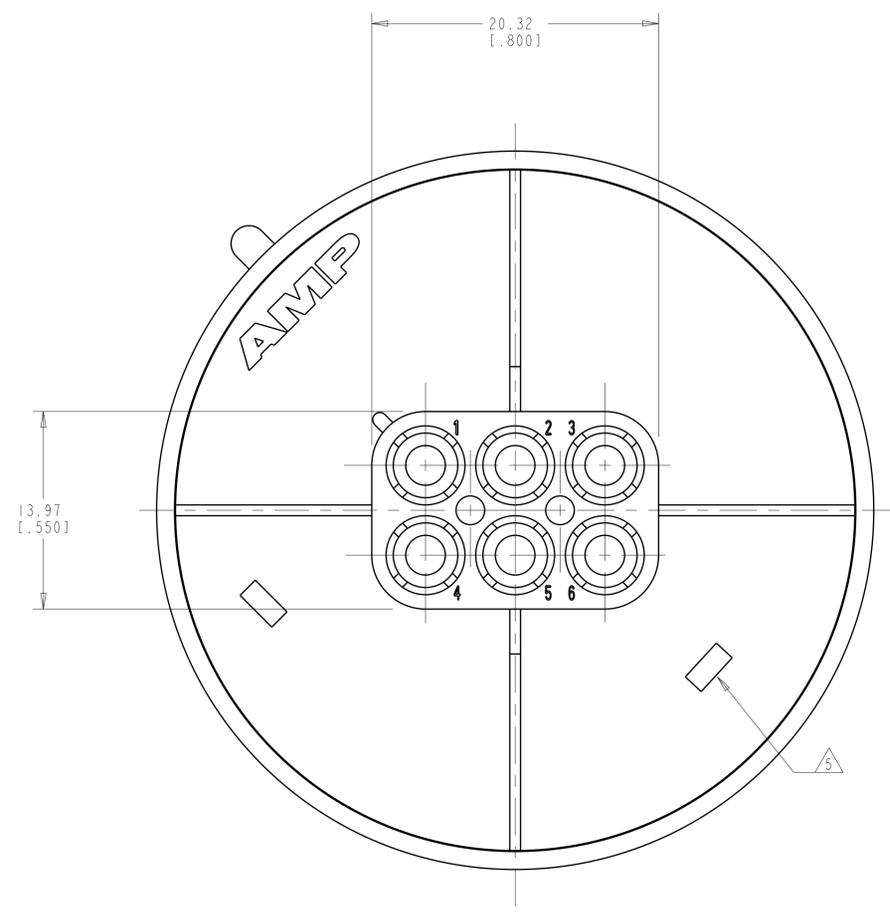

BLACK	1-794760-9
GRAY	1-794760-8
BLUE	1-794760-6
GREEN	1-794760-5
YELLOW	1-794760-4
ORANGE	1-794760-3
RED	1-794760-2
BROWN	1-794760-1
NATURAL	794760-1
COLOR	PART NUMBER

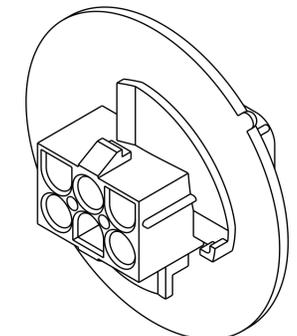

3-DIMENSIONAL MODEL
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN K. WHITAKER 20-JUNE-2000	CHK K. COBLE 20-JUNE-2000	APVD K. COBLE 20-JUNE-2000	NAME CAP. 6 CIRCUIT, UNIVERSAL MATE-N-LOK(TM), SPECIAL
0 PLC ±	1 PLC ±	2 PLC ±	3 PLC ±	4 PLC ±	ANGLES ±
±0.511(.020)	±	±	±	±	±40° 30'
MATERIAL NYLON UL 94V-0, WHITE	FINISH	WEIGHT	SCALE 4:1	SHEET 1 OF 1	REV F

CUSTOMER DRAWING