


VLF504015MT-6R8M-CA

Applications		Automotive Grade
Feature		Wire Wound
		Magnetic Shield
		Ferrite Core
		AEC-Q200
Series	VLF-M Series / VLF504015MT-CA Type	
Status	PROD	

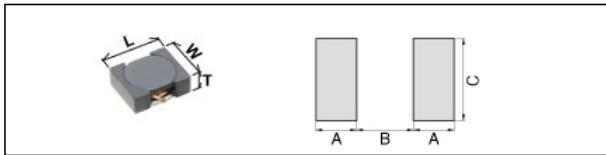

Size	
Length(L)	5.00mm +/-0.30mm
Width(W)	4.00mm +/-0.30mm
Thickness(T)	1.50mm Max.
Recommended Land Pattern (A)	1.30mm Nom.
Recommended Land Pattern (B)	1.60mm Nom.
Recommended Land Pattern (C)	2.20mm Nom.


Electrical Characteristics	
Inductance	6.8uH +/-20% at 1MHz
Rated Current (L Change) [Typ.]	1.83A (30% Down)
Rated Current (L Change) [Max.]	1.65A (30% Down)
Rated Current (Temperature Rise) [Typ.]	2A (40degC Rise)
DC Resistance [Nom.]	80mΩ
DC Resistance [Max.]	100mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow
AEC Q200	Yes
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	1000Pcs Min.
Weight	0.114g


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

VLF504015MT-6R8M-CA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

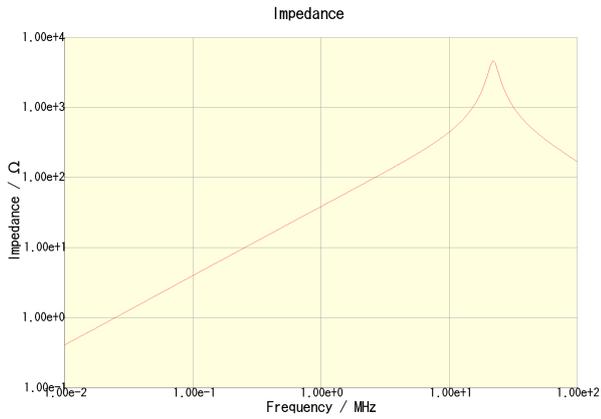


VLF504015MT-6R8M-CA

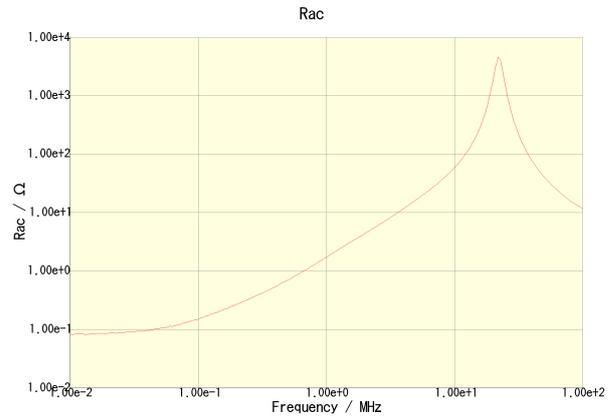

VLF504015MT-6R8M-CA

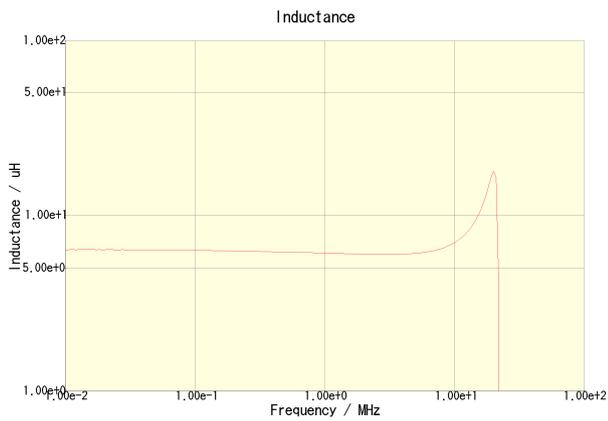

VLF504015MT-6R8M-CA

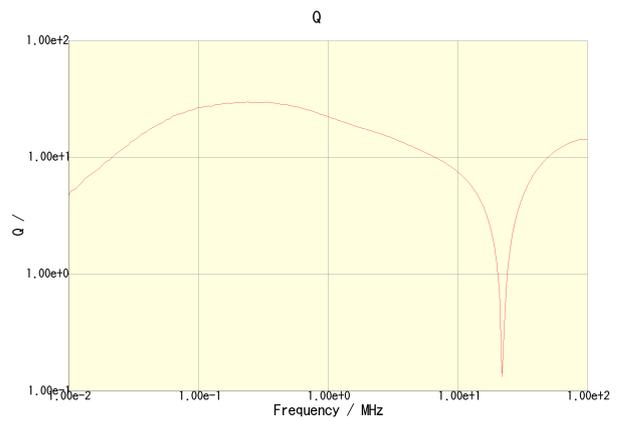


VLF504015MT-6R8M-CA

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

VLF504015MT-6R8M-CA

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

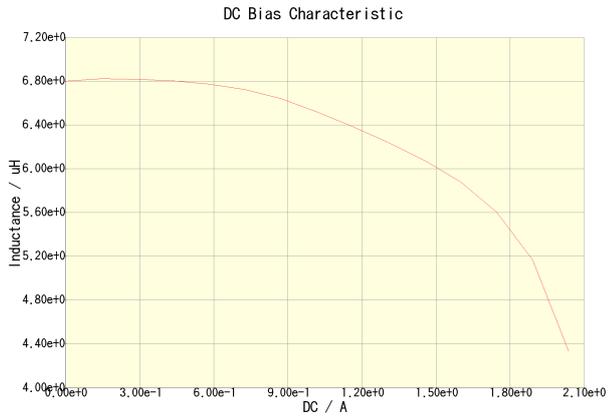

VLF504015MT-6R8M-CA(Amb. Temp. = 20degc)



VLF504015MT-6R8M-CA(DC = 0A) VLF504015MT-6R8M-CA(DC = 0.825A)

Temperature Rise by DC
no data available

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.