

## Housing - HC-B 10-TFQ-H/O2STM20G - 1412451

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON sleeve housing B10, for double locking latch, height 72 mm, with thread 2x M20, straight conductor exit

As illustrated but with two cable outlets



### Key Commercial Data

Packing unit	1 pc
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Size	B10

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Degree of protection	IP65

#### Material data

Housing material	Aluminum die-cast
------------------	-------------------

### Classifications

#### eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 8.0	27440202

# Housing - HC-B 10-TFQ-H/O2STM20G - 1412451

## Classifications

eCl@ss

eCl@ss 9.0	27440202
------------	----------

ETIM

ETIM 4.0	EC002498
ETIM 5.0	EC002498

## Approvals

Approvals

---

Approvals

EAC

---

Ex Approvals

---

Approvals submitted


---

Approval details

EAC
-----

## Drawings

Dimensional drawing

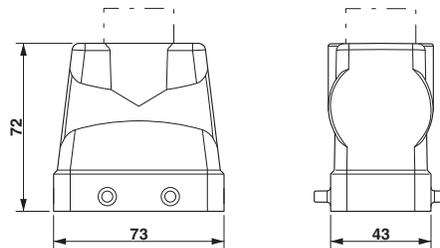

Dimensional drawing

---