Surface Mount Type



Series: SVPB




Features

- Low profile (Height 5 mm max.)
- RoHS compliance, Halogen free


	$\mathbf{n} \mathbf{o}$	CIT	102	TIA	ns
-		UII	wa	ш	лю

Size code		C5	C55		
Category temperature range		−55 °C to	+105 °C		
Rated voltage range	2.5 V.D	C to 20 V.DC	20 V.DC		
Rated capacitance range	15 µF	to 120 μF	22 µF		
Capacitance tolerance		±20 % (120 l	Hz / + 20 °C)		
Leakage current	Please see the attached characteristics list				
Dissipation factor (tan δ)	Please see the attached characteristics list				
	+105 °C, 1000 h, rated voltage applied				
Endurance	Capacitance change Within ±20 % of the initial value (±30 % for C5 size)				
Lildulatice	tan δ	≤ 150 % of the initial limit			
	DC leakage current Within the initial limit				
	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage				
Damp heat	Capacitance change	pacitance change Within ±20 % of the initial value			
(Steady State)	tan δ	≤ 150 % of the initial limit			
	DC leakage current	Within the initial limit (after voltage processing)			

Marking

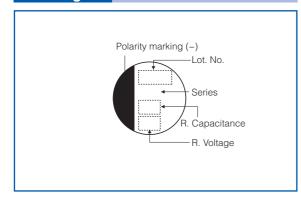

Dimensions (not to scale)

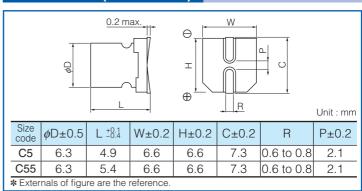

Characteristics list

Potos		Rated	Case size (mm)			Specifications			Standard (Reel size : ϕ 380)		
Series vo	Rated voltage (V.DC)	capacitance (µF)	φD	L	code	Ripple*1 current (mAr.m.s.)	ESR*2 (mΩ max.)	tan δ*3	LC*4 (µA)	Part number	Min. Packaging Q'ty (pcs)
	2.5	120	6.3	4.9	C5	1670	40	0.12	120	2R5SVPB120M	1300
	4.0	100	6.3	4.9		1670	40	0.12	160	4SVPB100M	1300
	6.3	82	6.3	4.9		1670	40	0.12	207	6SVPB82M	1300
	10	56	6.3	4.9		1670	40	0.12	224	10SVPB56M	1300
	16	33	6.3	4.9		1670	40	0.12	211	16SVPB33M	1300
	20	15	6.3	4.9		2000	45	0.12	120	20SVPB15M	1300
	20	22	6.3	5.4	C55	2000	35	0.12	88	20SVPB22M	1000

- *1 Ripple current (100 kHz/ +105 °C), *2 ESR (100 kHz to 300 kHz/+20 °C) *3 $\tan \delta$ (120 Hz/+20 °C) *4 After 2 minutes
- ◆ Please refer to each page in this catarog for "Reflow conditions" and "Taping specifications".

E	cy correction f		Annual Contract to the contract of the contrac
- Fradilan	ICV COPPORTION	PINTAL TALL	IINNIA CIIPPANT
IICUUCI		actor for it	IDDIC CUITCIII

Frequency	120 Hz ≦ f < 1 kHz	1 kHz ≦ f < 10 kHz	10 kHz ≦ f < 100 kHz	100 kHz ≤ f < 500 kHz
Coefficient	0.05	0.3	0.7	1



Guidelines and precautions regarding the technical information and use of our products described in this online catalog.

- If you want to use our products described in this online catalog for applications requiring special qualities or reliability, or for applications where the failure or malfunction of the products may directly jeopardize human life or potentially cause personal injury (e.g. aircraft and aerospace equipment, traffic and transportation equipment, combustion equipment, medical equipment, accident prevention, anti-crime equipment, and/or safety equipment), it is necessary to verify whether the specifications of our products fit to such applications. Please ensure that you will ask and check with our inquiry desk as to whether the specifications of our products fit to such applications use before you use our products.
- The quality and performance of our products as described in this online catalog only apply to our products when used in isolation. Therefore, please ensure you evaluate and verify our products under the specific circumstances in which our products are assembled in your own products and in which our products will actually be used.
- If you use our products in equipment that requires a high degree of reliability, regardless of the application, it is recommended that you set up protection circuits and redundancy circuits in order to ensure safety of your equipment.
- The products and product specifications described in this online catalog are subject to change for improvement without prior notice. Therefore, please be sure to request and confirm the latest product specifications which explain the specifications of our products in detail, before you finalize the design of your applications, purchase, or use our products.
- The technical information in this online catalog provides examples of our products' typical operations and application circuits. We do not guarantee the non-infringement of third party's intellectual property rights and we do not grant any license, right, or interest in our intellectual property.
- If any of our products, product specifications and/or technical information in this online catalog is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially with regard to security and export control, shall be observed.

<Regarding the Certificate of Compliance with the EU RoHS Directive/REACH Regulations>

- The switchover date for compliance with the RoHS Directive/REACH Regulations varies depending on the part number or series of our products.
- When you use the inventory of our products for which it is unclear whether those products are compliant with the RoHS Directive/REACH Regulation, please select "Sales Inquiry" in the website inquiry form and contact us.

We do not take any responsibility for the use of our products outside the scope of the specifications, descriptions, guidelines and precautions described in this online catalog.