




3 PIN

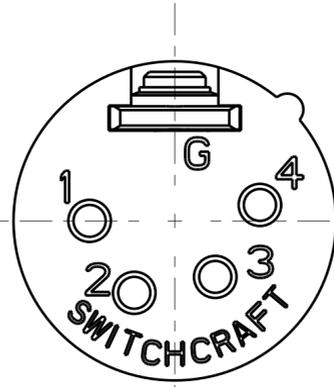


4 PIN

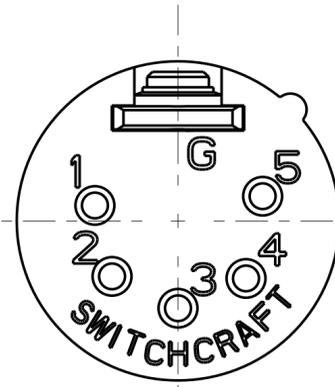

5 PIN

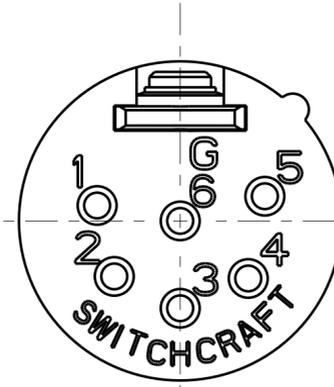


6 PIN

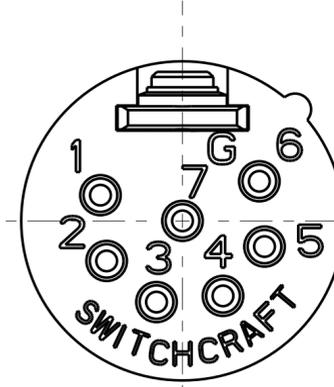

7 PIN

- NOTES:**
1. ALL DIMENSIONS REF. UNLESS OTHERWISE SPECIFIED.
 2. INSERT LOCKING HOLE MUST ACCEPT $\varnothing 0.123$ POST.
 3. KEYWAY ON 4,5,6, AND 7 PIN VERSIONS ONLY EXTENDS UP TO 0.125 FROM REAR SURFACE.

PRODUCT NO.	DIM "A"	DIM "B"
QG3M	1.01	0.27
QG4M	0.91	0.24
QG5M	0.92	0.24
QG6M	0.92	0.24
QG7M	0.82	0.24

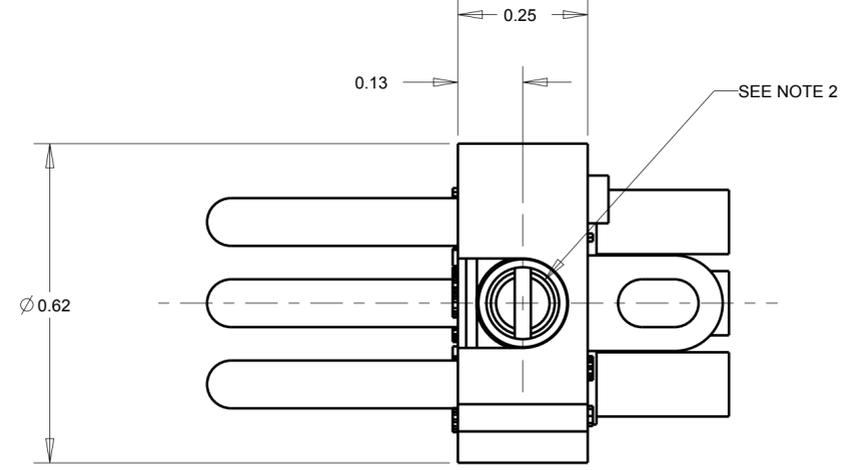

STANDARD SERIES

SCREW - STAINLESS STEEL
 SOLDER TERMINAL - BRASS, ELECTRO TIN PLATED
 INSULATOR - POLYESTER, GREEN (UL94V-0)
 CONTACT PIN - BRASS, SILVER PLATED

QG M

CONTACT PLATING
 BLANK = SILVER (STANDARD)
 AU = GOLD OVER NICKEL

HOUSING FINISH
 BLANK = NICKEL PLATE (STANDARD)
 B = BLACK



NO. OF CONTACTS:
 3 = 3 CONTACTS
 4 = 4 CONTACTS
 5 = 5 CONTACTS
 6 = 6 CONTACTS
 7 = 7 CONTACTS

PROFESSIONAL SERIES

SAME AS ABOVE EXCEPT
 CONTACT PIN - PHOSPHOR BRONZE, GOLD OVER NICKEL

QGP M

NO. OF CONTACTS:
 3 = 3 CONTACTS
 4 = 4 CONTACTS
 5 = 5 CONTACTS
 6 = 6 CONTACTS
 7 = 7 CONTACTS

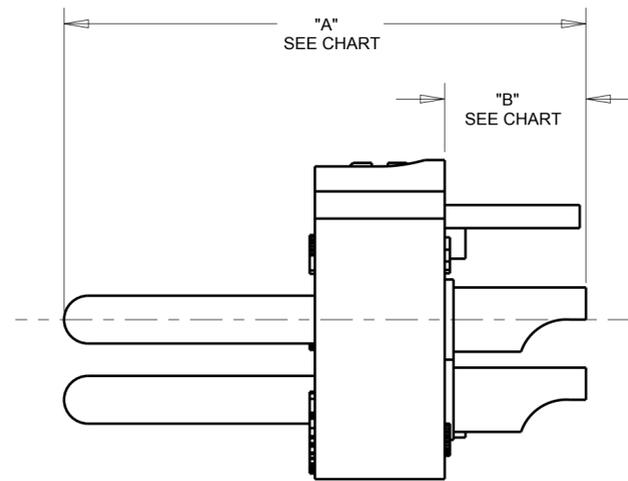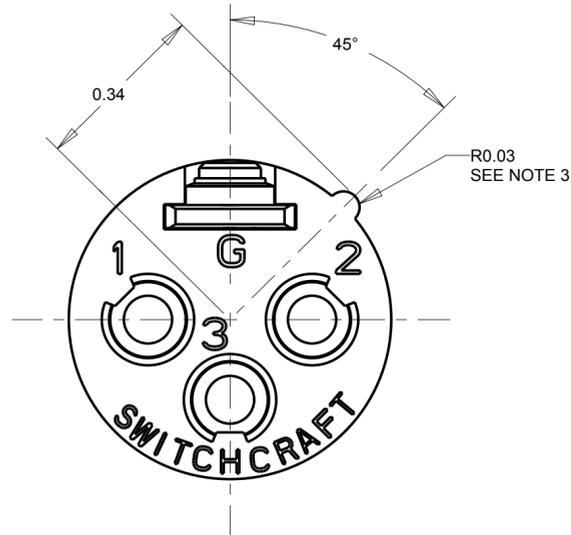

CUSTOMER DRAWING

REVISIONS					STAR SYMBOL DENOTES CRITICAL DIMENSION		THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.					
REV	ECO NUMBER	DATE	BY	APVD			SIZE	WIDTH	MULT	LBS/M	TEMPER	
N	27977	12-15-17	PC	TJK	UNLESS OTHERWISE SPECIFIED		FINISH		MATERIAL			
M	23067	1-5-00	JL	DG	1. ALL DIMENSIONS IN INCHES -TWO PLACE DECIMALS ± 0.01 -THREE PLACE DECIMALS ± 0.005 -ANGLES $\pm 1^\circ$ -ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.		SPEC No.		SPEC No.			
L	22838	10-1-99	JL	DG	2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ± 0.002		FIRST USED ON		SCALE			
K	22563	12-10-98	JL	EB	3. REMOVE ALL BURRS		DATE DRAWN		BY		CHKD	APVD
J	22610	11-23-98	DA	EB	DO NOT SCALE DRAWING		8-22-94		SG		SG	GHJ
							NAME		PART No.		REV	
							MALE QG INSERT SERIES		QG M SERIES		N	