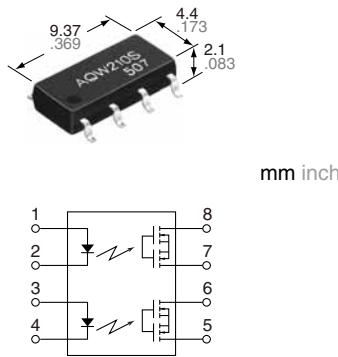


**Miniature SOP8-pin type  
of 60V/350V/400V  
load voltage**

**PhotoMOS®  
GU SOP 2 Form A  
(AQW210S)**



**RoHS compliant**

### FEATURES

**1. 2 channels in miniature SOP8-pin design**

The device comes in a super-miniature SO package measuring (W) 4.4 × (L) 9.37 × (H) 2.1 mm (W) .173× (L) .369× (H) .083 inch—approx. 38% of the volume and 66% of the footprint size of DIP8-pin type.

**2. Controls low-level analog signals**

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

**3. Low-level off state leakage current of max. 1 µA**

### TYPICAL APPLICATIONS

- Measuring instruments
- Data communications
- Computers
- Industrial robots
- High-speed inspection machines.

### TYPES

AC/DC dual use	Output rating*		Package	Part No.			Packing quantity		
	Load voltage	Load current		Tube packing style		Tape and reel packing style	Tube	Tape and reel	
				Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side				
AC/DC dual use	60V	400mA	SOP8-pin	AQW212S	AQW212SX	AQW212SZ	1 tube contains: 50 pcs. 1 batch contains: 1,000 pcs.	1,000 pcs.	
	350V	100mA		AQW210S	AQW210SX	AQW210SZ			
	400V	80mA		AQW214S	AQW214SX	AQW214SZ			

\* Indicate the peak AC and DC values.

Note: The packing style indicator "X" or "Z" are not marked on the device.

### RATING

**1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)**

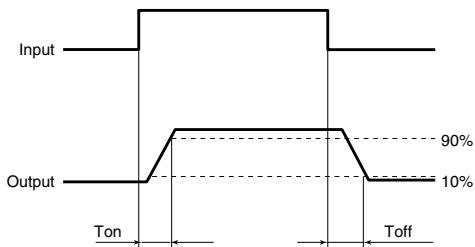
Item		Symbol	AQW212S	AQW210S	AQW214S	Remarks
Input	LED forward current	I <sub>F</sub>		50 mA		
	LED reverse voltage	V <sub>R</sub>		5 V		
	Peak forward current	I <sub>FP</sub>		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>		75 mW		
Output	Load voltage (peak AC)	V <sub>L</sub>	60 V	350 V	400 V	
	Continuous load current	I <sub>L</sub>	0.4 A (0.5 A)	0.1 A (0.13 A)	0.08 A (0.1 A)	Peak AC, DC ( ): in case of using only 1 channel
	Peak load current	I <sub>peak</sub>	1.5 A	0.3 A	0.24 A	A connection: 100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>		600 mW		
Total power dissipation		P <sub>T</sub>		650 mW		
I/O isolation voltage		V <sub>iso</sub>		1,500 V AC		
Temperature limits	Operating	T <sub>opr</sub>	−40°C to +85°C −40°F to +185°F			Non-condensing at low temperatures
	Storage	T <sub>sig</sub>	−40°C to +100°C −40°F to +212°F			

# GU SOP 2 Form A (AQW21OS)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW212S	AQW210S	AQW214S	Remarks		
Input	LED operate current	Typical	$I_{Fon}$	0.9 mA		$I_L = \text{Max.}$		
		Maximum		3 mA				
Input	LED turn off current	Minimum	$I_{Foff}$	0.4 mA		$I_L = \text{Max.}$		
		Typical		0.8 mA				
Output	LED dropout voltage	Typical	$V_F$	1.25 V (1.14 V at $I_F = 5 \text{ mA}$ )		$I_F = 50 \text{ mA}$		
		Maximum		1.5 V				
Output	On resistance	Typical	$R_{on}$	0.83 Ω	16 Ω	30 Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time	
		Maximum		2.5 Ω	35 Ω	50 Ω		
Transfer characteristics	Off state leakage current	Maximum	$I_{Leak}$	1 μA			$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$	
		Typical		0.65 ms	0.23 ms	0.21 ms		
	Turn on time*	Maximum	$T_{on}$	2 ms	0.5 ms		$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$	
		Typical		0.08 ms	0.04 ms			
	Turn off time*	Maximum	$T_{off}$	0.2 ms		$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$		
		Typical		0.8 pF			$f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$	
		Maximum		1.5 pF				
	Initial I/O isolation resistance	Minimum	$R_{iso}$	1,000 MΩ		500 V DC		

\*Turn on/ Turn off time



## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	$I_F$	5	mA

■ These products are not designed for automotive use.

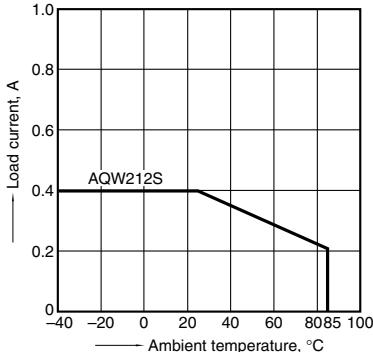
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA

### 1.-(1) Load current vs. ambient temperature characteristics

Allowable ambient temperature:  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$   
 $-40^\circ\text{F}$  to  $+185^\circ\text{F}$

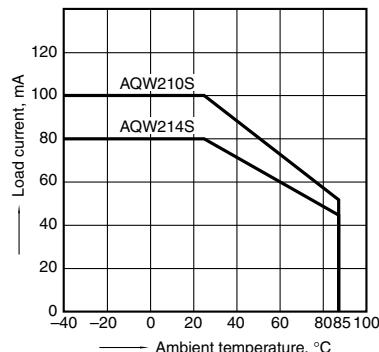
When using 2 channels



### 1.-(2) Load current vs. ambient temperature characteristics

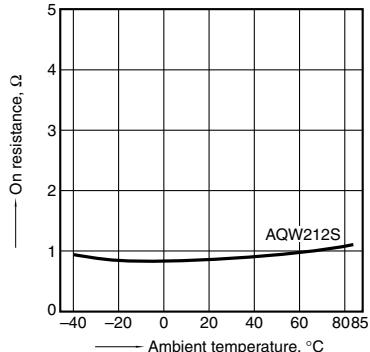
Allowable ambient temperature:  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$   
 $-40^\circ\text{F}$  to  $+185^\circ\text{F}$

When using 2 channels



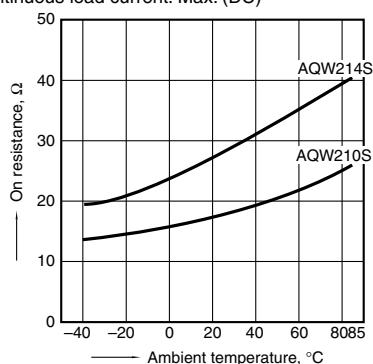
### 2.-(1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

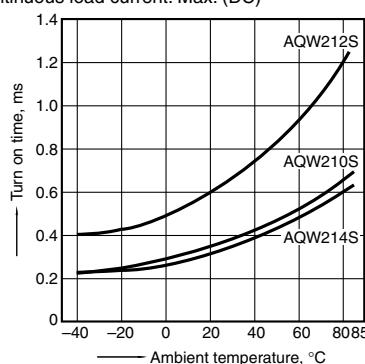


**2.-2) On resistance vs. ambient temperature characteristics**

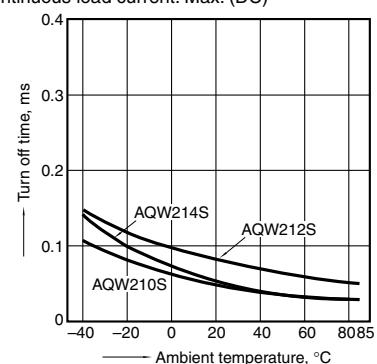
Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

**3. Turn on time vs. ambient temperature characteristics**

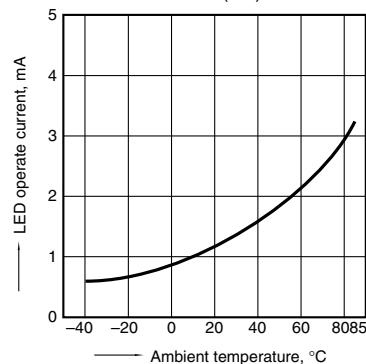
LED current: 5 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

**4. Turn off time vs. ambient temperature characteristics**

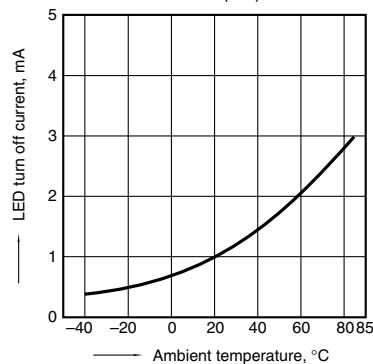
LED current: 5 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

**5. LED operate current vs. ambient temperature characteristics**

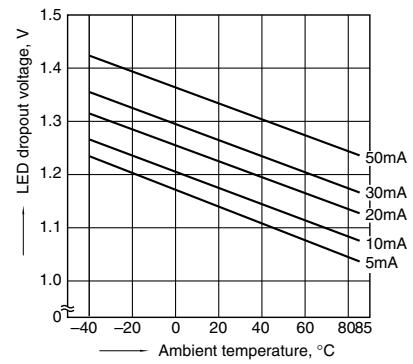
Sample: All types; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

**6. LED turn off current vs. ambient temperature characteristics**

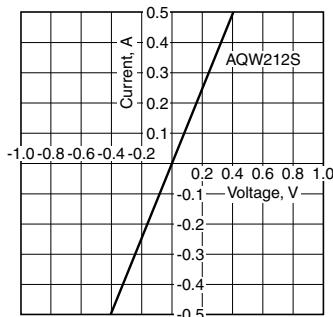
Sample: All types; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

**7. LED dropout voltage vs. ambient temperature characteristics**

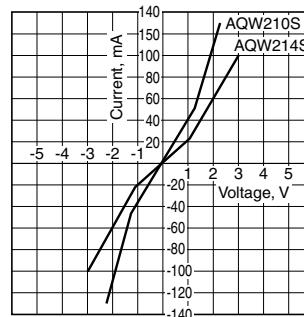
Sample: All types;  
LED current: 5 to 50 mA

**8.-1) Current vs. voltage characteristics of output at MOS portion**

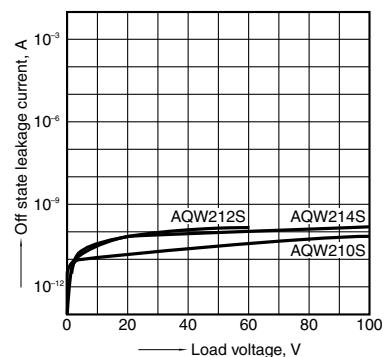
Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

**8.-2) Current vs. voltage characteristics of output at MOS portion**

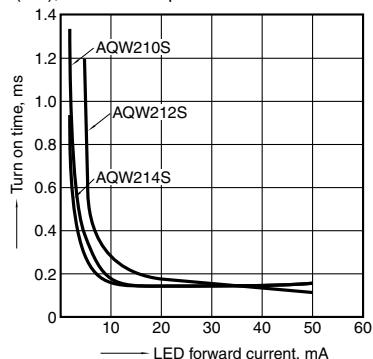
Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

**9. Off state leakage current vs. load voltage characteristics**

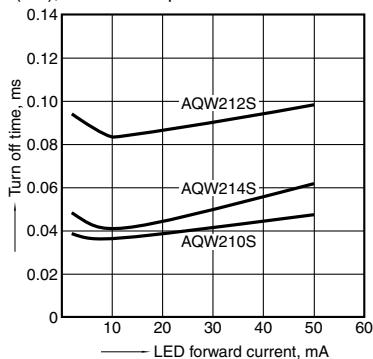
Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

**10. Turn on time vs. LED forward current characteristics**

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

**11. Turn off time vs. LED forward current characteristics**

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

**12. Output capacitance vs. applied voltage characteristics**

Measured portion: between terminals 5 and 6, 7 and 8;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

