NOTES:

I. MATERIAL AND FINISH (PLATING THICKNESS IN MICRO-INCHES):

BODY - BRASS, ALBALOY PLATING

CONTACT PIN - BRASS, SILVER PLATING

INSULATOR - PTFE, NATURAL

2. ELECTRICAL:

A. IMPEDANCE:50 OHM

B. FREQUENCY RANGE: DC-6 GHz

C. RETURN LOSS: 1.15 MAX. @ DC-4GHz

I.2 MAX.@ 4-6 GHz

D. INSERTION LOSS: 0.05+0.05*SQRT(f) dB

E. INTERMODULATION 3RD ORDER: -166 dBc MAX.(2*43 dBm)

F. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS. MIN. 60 Hz

G. INSULATION RESISTANCE: 5000 M Ω MIN.

3. MECHANICAL:

A. DURABILITY: 100 CYCLES MIN.

B. TEMPERATURE RANGE: -65°C TO +165°C




 REVISIONS


 REV
 DESCRIPTION
 DATE
 ECO
 APPR

 A
 RELEASE TO MFG.
 07-Apr-16
 00201
 KCE

 B
 NOTE 3A 100 WAS 500
 11/29/16
 02521
 KCE

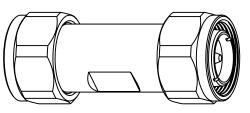

SCALE 1.000

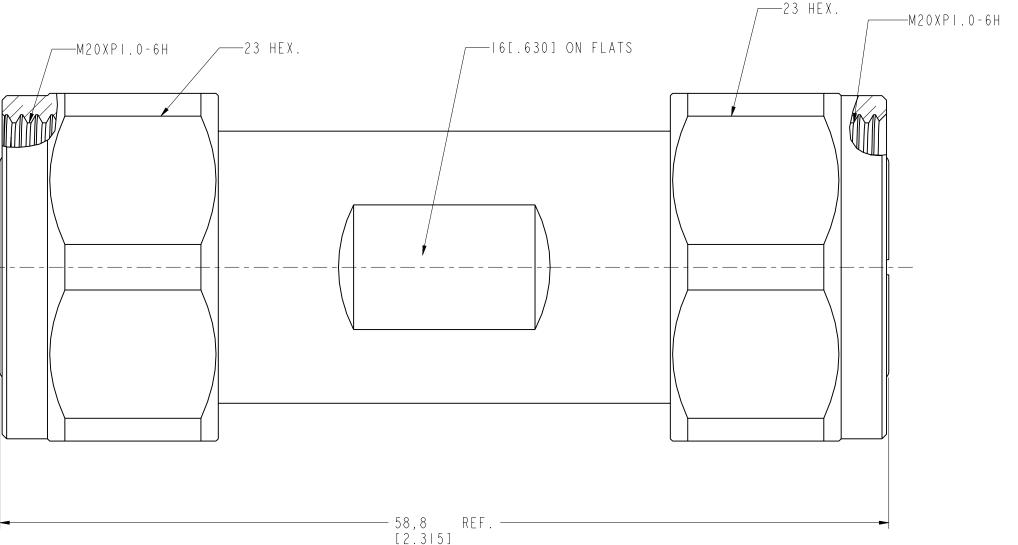

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: < 0.5 mm 0.5 - 6 mm 6 - 30 mm 30 - 120 mm ANGLES \pm 0.05 mm \pm 0.1 mm \pm 0.2 mm \pm 0.3 mm \pm 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon requiest; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the funishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting	MATERIAL -	DRAWN K.SONG ENGINEER H.HE DATE DATE DATE D7-Apr-1	4.3-10 PLUG 10 4.3-10	Amphenol RF www.amphenolrf.com
	1 E V D & 3 O &	APPROVED DATE S.HSIEH 02-Dec-	6 SCALE: 4.0:1.0 SHEET 2 OF 2	DRAWING NO. 4310M-4310MI-ATS-50
Irights to permitting such holder or any other sperson to manufacture, use or sall any	CONFIGURATION LEVEL:	CAD FILE	DWG SIZE REV	ITEM NO. 88M-88MI-AB-5-F
	FINISH		В В	PART NO. AD-4310P4310P-1