

date 08/05/2022

page 1 of 3

## MODEL: HSS-B20-NP-01 | DESCRIPTION: HEAT SINK

#### **FEATURES**

- TO-220 package
- round hole for component attachment
- · low profile design
- black anodized finish





**MODEL** thermal resistance1 power dissipation<sup>1</sup> @ 75°C ∆T, nat @ 1 W, @ 1 W, @ 1 W, @ 75°C ∆T, nat 400 LFM conv (°C/W) 200 LFM nat conv conv (°C/W)  $(^{\circ}C/W)$ (°C/W) (W) 18.29 21.92 7.05 5.56 4.10 HSS-B20-NP-01

Note:


1. See performance curves for full thermal resistance details.

## PERFORMANCE CURVES

	Heatsink Temperature Rise Above Ambient (ΔT = Ths - Ta) (°C)		
Power (W)	Natural Conv.	200 LFM	400 LFM
0	0	0	0
1	21.92	7.05	5.56
2	41.78	14.01	11.07
3	58.69	21.06	16.38
4	73.87	28.48	22.02
5	90.68	35.84	27.40

Ths: "hot spot" temperature measured on the heatsink

Ta: ambient temperature

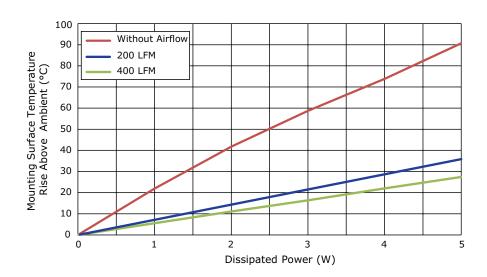



# **MECHANICAL DRAWING**


units: mm

tolerance: ±0.5 mm

MATERIAL	AL5052
FINISH	black anodized
THICKNESS	0.8 mm
WEIGHT	2.4 g

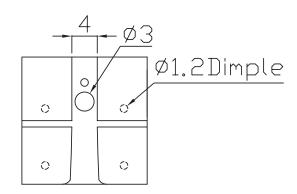



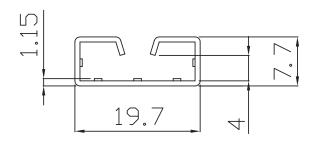

Additional Resources: Product Page | 3D Model

CUI DEVICES | MODEL: HSS-B20-NP-01 | DESCRIPTION: HEAT SINK

### **date** 08/05/2022 | **page** 3 of 3

## **REVISION HISTORY**

rev.	description	date
1.0	initial release	03/29/2017
1.01	brand update	02/13/2020
1.02	logo, datasheet style update	08/05/2022

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.