
REVISION A ADDED REFLOW PROFILE & RoHS 11/13/07 YS

REVISION B REVISED TEMP RATING 06/09/15 MP MINIATURE ENCAPSULATED TELECOMMUNICATION HIGH IMPEDANCE TRANSFORMER

- A. Electrical Specifications (@ 25°C)
 - 1. Primary Impedance; $20k\Omega$
 - 2. Secondary Impedance; $20k\Omega$
 - 3. Primary Inductance; 18H MIN @ 200Hz, 10mVrms, Lp Measured (1-3)
 - 4. Leakage Inductance; 50mH MAX @ 1kHz, 10mVrms Measured (1-3) with 6 & 4 shorted
 - 5. DC Resistance;

 $(1-3):1300\Omega \pm 15\%$ $(6-4):1300\Omega \pm 15\%$


- 6. Turns Ratio; $(1-3):(6-4)=1:1.00 \pm 2\%$
- 7. Shunt Loss; $60k\Omega$ MIN @ 200Hz, 10mVrms, Rp Measured (1-3)
- 8. Dielectric Strength; 1875Vrms 1 second @ Pri-Sec
- B. Marking; TTC-5034H, TAMURA, date code and country of origin "H" designates Safety Agency Approved family classification.
- C. Safety; Certified to UL60950, EN60950



- E. Operating Temperature: -20 to +85°C Storage Temperature: -20 to +85°C
- F. Suggested Reflow Profile (Terminal)
 Customer to determine proper profile based
 on actual conditions.




UL #E208555




NUMBER

MODEL

NOTE: Board washing is not recommended for these parts.

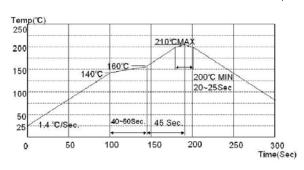

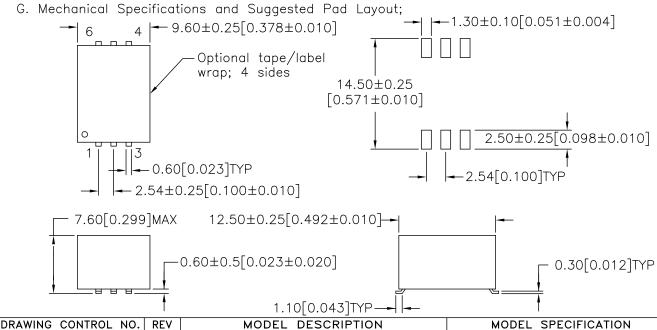

PREPARED BY:

C. POPPE ENGINEER:

MATHI P.

SAFETY ENGINEER

ENGINEER CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

P-A1-13358

В

MODEL DESCRIPTION
TELECOMMUNICATION
TRANSFORMER

TAMURA CORPORATION OF AMERICA1040 SOUTH ANDREASEN DRIVE, #100 ESCONDIDO, CA. 92029
(951) 699-1270 FAX 7607400536

TTC-5034

92029 DIM: mm[In] SCL: 2/1 SH: 1 OF

APPROVED:

M. PITCHAI

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.