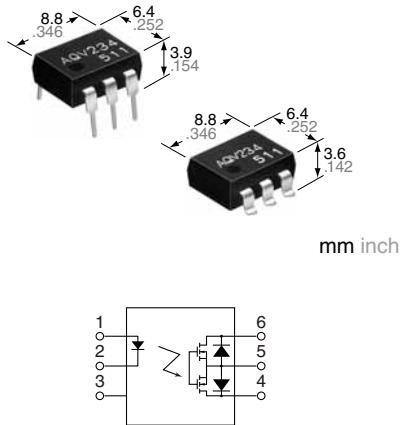




**DIP6-pin type
featuring high sensitivity**

PhotoMOS®

**HS 1 Form A
(AQV234)**



FEATURES

1. High sensitivity

LED operate current: 0.31mA (typ.)

Recommended LED input current: 2mA

2. Low-level off state leakage current of max. 1 μ A

3. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

TYPICAL APPLICATIONS

1. High-speed inspection machines

Scanner, IC checker, Board tester, etc.

2. Telephone and data communication equipment

RoHS compliant

TYPES

Output rating*	Output rating*		Package	Part No.			Packing quantity		
				Through hole terminal		Surface-mount terminal			
	Load voltage	Load current		Tube packing style		Tape and reel packing style			
						Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		
AC/DC dual use	400 V	120 mA	DIP6-pin	AQV234	AQV234A	AQV234AX	AQV234AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs. 1,000 pcs.	

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

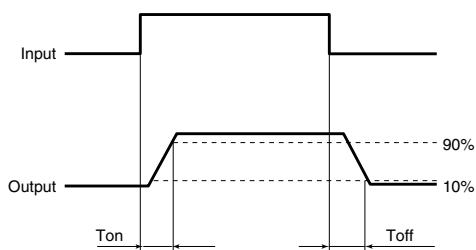
Item		Symbol	Type of connection	AQV234(A)	Remarks
Input	LED forward current	I _F	A	50 mA	
	LED reverse voltage	V _R		5 V	
	Peak forward current	I _{FP}		1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		75 mW	
Output	Load voltage (Peak AC)	V _L	B	400 V	
	Continuous load current	I _L		0.12 A	A connection: Peak AC, DC B, C connection: DC
	Peak load current	I _{peak}		0.13 A	
	Power dissipation	P _{out}	C	0.15 A	
Total power dissipation		P _T		0.3 A	A connection: 100 ms (1 shot), V _L = DC
I/O isolation voltage		V _{iso}		500 mW	
Temperature limits	Operating	T _{opr}		550 mW	
	Storage	T _{stg}		1,500 V AC	Non-condensing at low temperature
				-40°C to +85°C -40°F to +185°F	
				-40°C to +100°C -40°F to +212°F	

HS 1 Form A (AQV234)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV234(A)	Remarks
Input	LED operate current	Typical Maximum	I _{fon}	—	0.31 mA
					0.5 mA $\Delta I_f / \Delta t \geq 100 \mu A/s$ I _L = Max.
	LED turn off current	Minimum	I _{foff}	—	0.1 mA
		Typical			0.29 mA $\Delta I_f / \Delta t \geq 100 \mu A/s$ I _L = Max.
Output	LED dropout voltage	Typical Maximum	V _F	—	1.25 V (1.1 V at I _F = 2 mA)
					1.5 V I _F = 50 mA
	On resistance	Typical	R _{on}	A	30 Ω
		Maximum			50 Ω I _F = 2 mA, I _L = Max. Within 1 s on time
		Typical	R _{on}	B	22.5 Ω
		Maximum			25 Ω I _F = 2 mA, I _L = Max. Within 1 s on time
Transistor characteristics	Typical	R _{on}	C	—	11.3 Ω
					12.5 Ω I _F = 2 mA, I _L = Max. Within 1 s on time
	Off state leakage current	Maximum	I _{leak}	—	1 μA I _F = 0 mA, V _L = Max.
	Turn on time*	T _{on}	—	—	0.89 ms I _F = 2 mA
					2 ms I _L = Max.
Transistor characteristics	Turn off time*	T _{off}	—	—	0.22 ms I _F = 2 mA
					1 ms I _L = Max.
	I/O capacitance	C _{iso}	—	—	0.8 pF f = 1 MHz
					1.5 pF V _B = 0 V
Transistor characteristics	Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ
	500 V DC				

*Turn on/Turn off time



RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	2	mA

■ These products are not designed for automotive use.

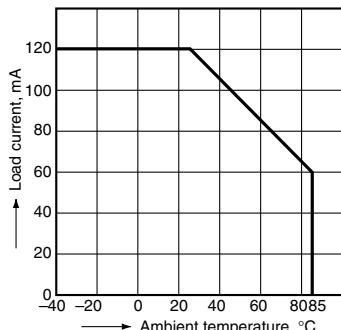
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics

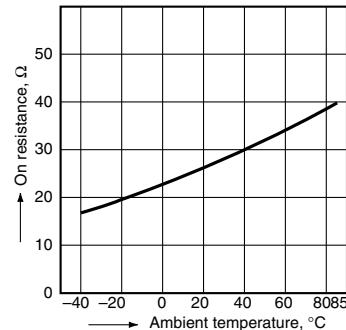
Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

Type of connection: A



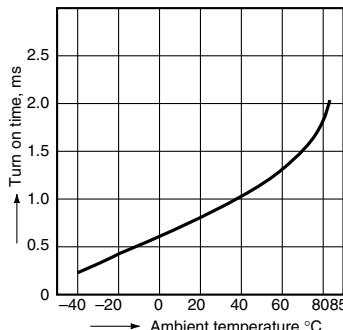
2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 2 mA; Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)



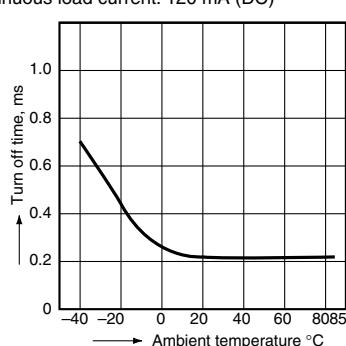
3. Turn on time vs. ambient temperature characteristics

LED current: 2 mA;
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

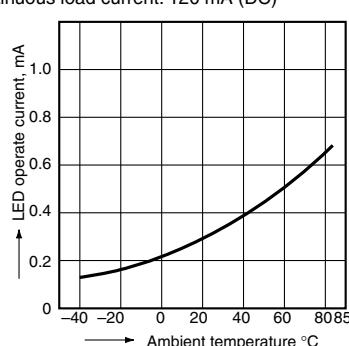


4. Turn off time vs. ambient temperature characteristics

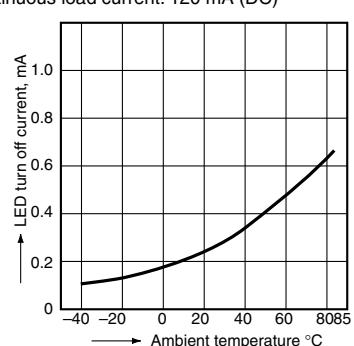
LED current: 2 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

**5. LED operate current vs. ambient temperature characteristics**

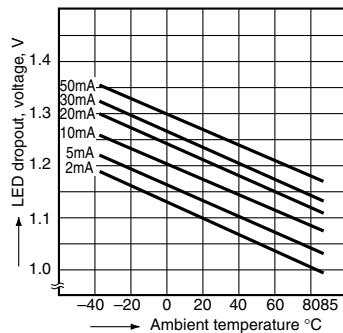
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

**6. LED turn off current vs. ambient temperature characteristics**

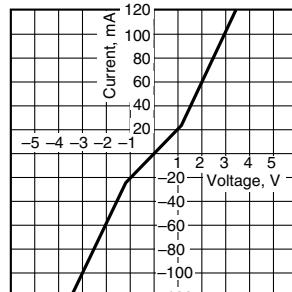
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

**7. LED dropout voltage vs. ambient temperature characteristics**

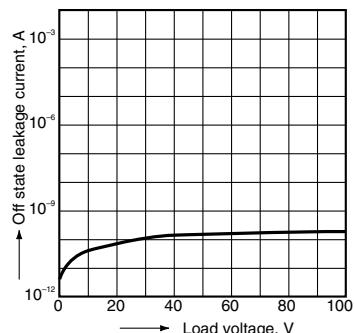
LED current: 2 to 50 mA

**8. Current vs. voltage characteristics of output at MOS portion**

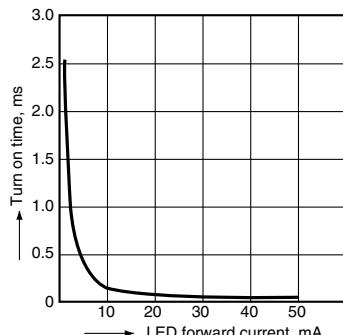
Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

**9. Off state leakage current vs. load voltage characteristics**

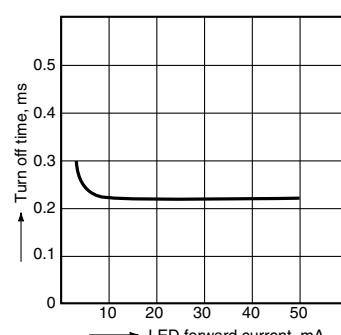
Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

**10. Turn on time vs. LED forward current characteristics**

Measured portion: between terminals 4 and 6; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

**11. Turn off time vs. LED forward current characteristics**

Measured portion: between terminals 4 and 6; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

**12. Output capacitance vs. applied voltage characteristics**

Measured portion: between terminals 4 and 6; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

