


(Product Change Notification)


·	•
Friday, April 20, 2012	PCN# 040112
To Whom It May Concern:	
Please be advised NorComp has made minor design 970-YYY-030R121. The housing screw was changed a Phillips head screw. Attached are copies of the proupdated drawings to provide all information regarding	l from a flat head screw to evious drawings and
We appreciate your understanding as we strive to of information regarding our product.	fer you the most current
Please confirm receipt & acceptance of product char- returning signed copy by fax or email) and contact u additional assistance.	
Regards,	
Matt Sigmon Product Engineer Fax: 704-424-5648	
Approved By:	
Company:	
Title:	

DESCRIPTION: 970 SERIES D-SUB BACKSHELL

BACKSHELL KIT INCLUDES: (2) BACKSHELL HALVES

- (2) 4-40 THUMBSCREWS
- (2) HOUSING SCREWS
- (1) SET OF COMPRESSION INSERTS VARIOUS SIZES
- (1) COMPRESSION SPRING

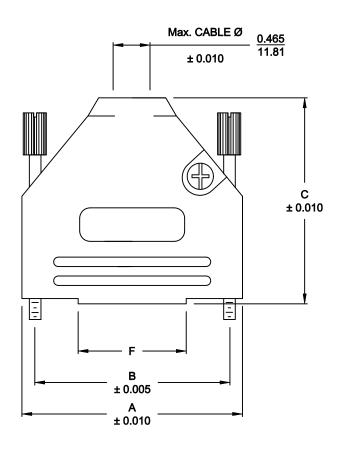



	OPERATING TEMP:			-30°C TO +90°C					
DIMENSIONS (IN.)									
	Α	В	С	D	E	F			
	1.228	0.984	1.571	0.590	0.388	0.514			
	31.19	24.99	39.90	14.99	9.86	13.06			

0.590

14.99

0.590

14.99

0.590

14.99

1.634

41.50

1.913

48.59

2.110

53.59

DIE-CAST ZINC ALLOY

0.393

9.98

0.378

9.60

0.409

10.39

0.789

20.04

1.024

26.01

1.690

42.93

STEEL

STEEL

ABS UL 94V-O

NICKEL OVER COPPER

MATERIAL:

JACKSCREWS:

M3 HOODSCREWS:

1.312

33.32

1.852

47.04

2.500

63.50

SCALE

COMPRESSION INSERT:

PLATING:

No. OF

PINS

9

15

25

37

1.555


39.50

2.102

53.39

2.744

69.70



BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. NorComp

DRAWN: DATE: PAM JENKINS 6-10-05 CHECKED: DATE:

OF

REV

9

THESE DRAWINGS AND SPECIFICATIONS ARE

THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE


> DWG NO. 970 -YYY-030R121


SHEET

DESCRIPTION: 970 SERIES D-SUB BACKSHELL

BACKSHELL KIT INCLUDES: (2) BACKSHELL HALVES

- (2) 4-40 THUMBSCREWS
- (2) HOUSING SCREWS
- (1) SET OF COMPRESSION INSERTS VARIOUS SIZES
- (1) COMPRESSION SPRING

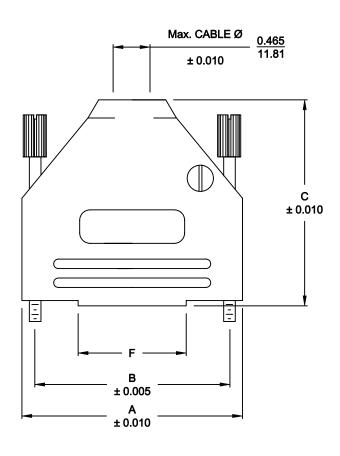



DIMENSIONS (IN.)									
No. OF PINS	Α	В	С	D	E	F			
9	1.228	0.984	1.571	0.590	0.388	0.514			
9	31.19	24.99	39.90	14.99	9.86	13.06			
15	1.555	1.312	1.634	0.590	0.393	0.789			
15	39.50	33.32	41.50	14.99	9.98	20.04			
25	2.102	1.852	1.913	0.590	0.378	1.024			
25	53.39	47.04	48.59	14.99	9.60	26.01			
27	2.744	2.500	2.110	0.590	0.409	1.690			

53.59

14.99

10.39

42.93

7

DIE-CAST ZINC ALLOY

STEEL

STEEL

ABS UL 94V-O

-30°C TO +90°C

NICKEL OVER COPPER

MATERIAL:

JACKSCREWS:

M3 HOODSCREWS:

OPERATING TEMP:

COMPRESSION INSERT:


PLATING:

37

69.70

63.50

DWG NO.





THESE DRAWINGS AND SPECIFICATIONS ARE

THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE

DRAWN: DATE: PAM JENKINS 6-10-05 CHECKED: DATE: SCALE SHEET OF REV

ROHS COMPLIANT

970 - YYY-030R121