


NOTES:

1. NOMINAL VOLTAGE IS 3.0V.
2. MAXIMUM THICKNESS OF BATTERY IS 0.028" (0.7MM).
3. MAXIMUM WEIGHT IS 2.0g.
4. ANODE AND CATHODE TERMINALS ARE MADE OF CONDUCTIVE CARBON INK ON TOP SURFACE ONLY.
INK WILL BE WITHIN THE 2 HATCH AREAS SHOWN, BUT FULL COVERAGE TO THE EDGES ARE NOT TO BE EXPECTED.
5. ALL MATERIALS ARE RoHS COMPLIANT.

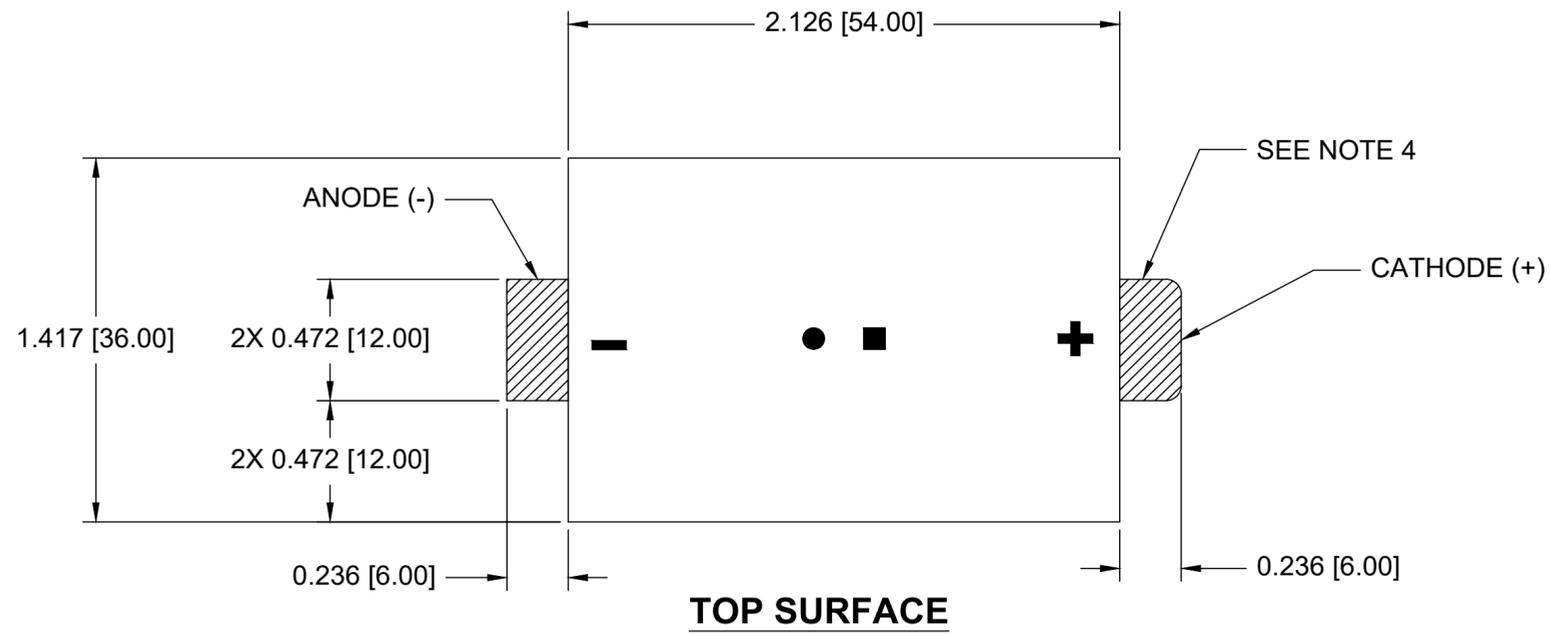

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
	DIMENSION UNITS		SCALE		CURRENT REV DESC: DIM. 0.236 [6.00] WAS 0.276 [7.00], 0.472 [12.00] WAS 0.433 [11.00] & 0.472 [12.00] WAS 0.551 [14.00].								
INCH/MM		2:1		GENERAL TOLERANCES (UNLESS SPECIFIED)									
DIVISIONAL SYMBOLS	mm		INCH		EC NO: 650769					BATTERY			
	4 PLACES ±----		±----		DRWN: MJMALONE 2020/12/04								
	3 PLACES ±----		±0.039		CHK'D: ----					3.0V			
	2 PLACES ±1.0		±----		APPR: ----								
	1 PLACE ±----		±----		INITIAL REVISION:					PRODUCT CUSTOMER DRAWING			
0 PLACES ±----		±----		DRWN: MJMALONE 2020/02/04									
ANGULAR TOL ± ---- °				APPR: JSMITH11 2020/06/01					DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				C-SIZE		13299		132990002		GENERAL MARKET		1 OF 1	

DOCUMENT STATUS	RQ	RELEASE DATE	2020/12/07	16:43:59
-----------------	----	--------------	------------	----------