
SCHEMATIC


16 AWG
OUTPUT

14 AWG
INTPUT

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

## ACTUAL SIZE:



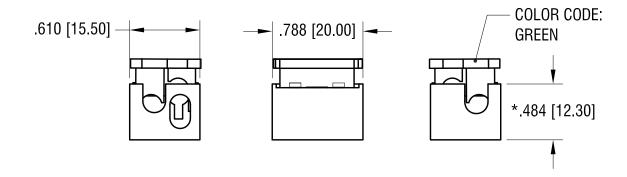

## NOTE

DATE

1. INSULATION: MAT'L- POLYCARBONATE, LEXAN UL 94V-0

2. CONTACT: MAT'L- COPPER ALLOY

FINISH- TIN PLATE, OVER NICKEL PLATE

3. FOR WIRE: SOLID WIRE

WIRE SIZE: 14 AWG, INPUT

16 AWG, OUTPUT

**DESCRIPTION** 

4. RATED VOLTAGE 300V RATED CURRENT: 15A 5. UL LISTED: E490623

## \* HEIGHT OF CLOSED CONNECTOR

## KEYSTONE ELECTRONICS CORP. www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500 PART NAME T - SERIES WIRE CONNECTOR MATERIAL AS NOTED FINISH DRN BY DATE 1.06.17 **AS NOTED** APP'D LN 1.2X TOLERANCES INCH [MM] CODE DWG NO. $\pm .010 [\pm 0.25]$ DECIMAL 8380 C ANGULAR ± 1° REV. UNLESS OTHERWISE SPECIFIED