

# MUR2060CT/MUR2060FCT

Ultrafast Recovery Rectifiers  
 Reverse Voltage 600V Forward Current 20 A

## Features

- FRED (Planar) wafer construction
- Ultrafast recovery time
- Low forward voltage drop, low power loss
- High efficiency
- Plastic package has underwriters Laboratory Flammability Classification 94V-0




**MUR2060CT**  
 Package: TO-220-AB



**MUR2060FCT**  
 Package: ITO-220-AB

## Mechanical Data

- Case: Epoxy, molded
- Weight: 1.9 grams (approximately)
- Finish: all external surfaces corrosion resistant and terminal leads readily solderable
- Lead temperature for soldering purposes: 260°C Max. for 10 sec
- 50 units per plastic tube



**Schematic Diagram**

## Maximum Ratings & Electrical Characteristics

( $T_A=25^\circ\text{C}$  unless otherwise noted)

Parameter	Test Conditions		Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage			$V_{RRM}$	600	V
Working Peak Reverse Voltage			$V_{RWM}$	600	V
Maximum DC Blocking Voltage			$V_{DC}$	600	V
Maximum Average Forward Rectified Current @ $T_c=105^\circ\text{C}$	Total Device Per Diode		$I_F(AV)$	20 10	A
Peak Forward Surge Current 8.3ms Single Half Sine-wave Superimposed on Rated Load per Diode			$I_{FSM}$	125	A
Voltage Rate of Change (rated $V_R$ )			$Dv/dt$	10000	V/ $\mu\text{s}$
Operating Junction Temperature Range			$T_J$	- 55 to +150	°C
Storage Temperature Range			$T_{STG}$	- 55 to +150	°C
Maximum Reverse Recover Time ( $I_F=0.5\text{A}$ , $I_R=1.0\text{A}$ , $I_{REC}=0.25\text{A}$ )			$T_{rr}$	50	ns
Maximum Instantaneous Forward Voltage per Leg	$I_F=10\text{A}$ $I_F=10\text{A}$	$T_c=25^\circ\text{C}$ $T_c=125^\circ\text{C}$	$V_F$	1.60 1.50	V
Maximum Reverse Current per Leg at Working Peak Reverse Voltage		$T_J=25^\circ\text{C}$ $T_J=100^\circ\text{C}$	$I_R$	10 500	$\mu\text{A}$ $\mu\text{A}$

### Thermal Characteristics $T_A=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Typ.(MUR2060CT)	Typ.(MUR2060FCT)	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case per Leg	2.0	4.0	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient per Leg	62.5	62.5	°C/W

Note: Pulse test:300us pulse width, duty cycle=2%

# MUR2060CT/MUR2060FCT

Ultrafast Recovery Rectifiers  
 Reverse Voltage 600V Forward Current 20 A

## Ratings and Characteristics Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

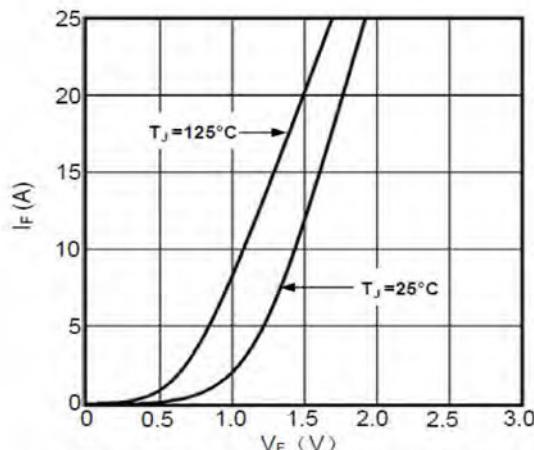


Fig1. Forward Voltage Drop vs Forward Current

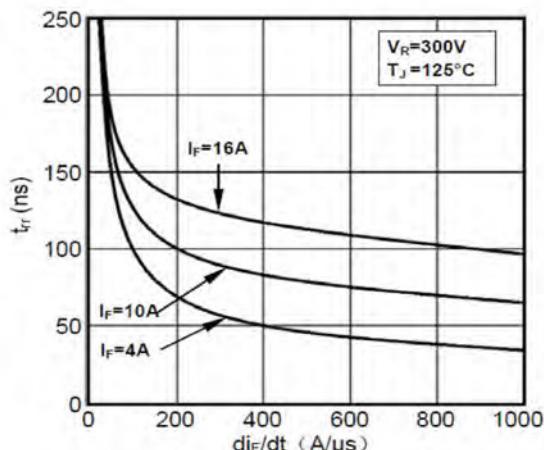


Fig2. Reverse Recovery Time vs  $di_F/dt$

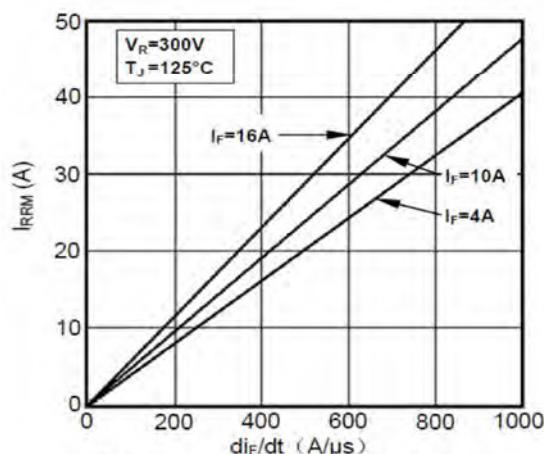


Fig3. Reverse Recovery Current vs  $di_F/dt$

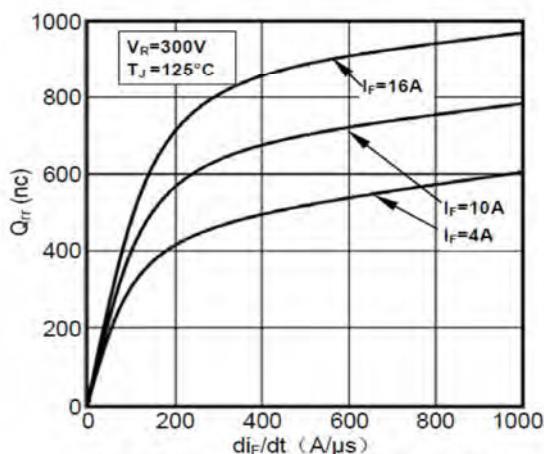


Fig4. Reverse Recovery Charge vs  $di_F/dt$

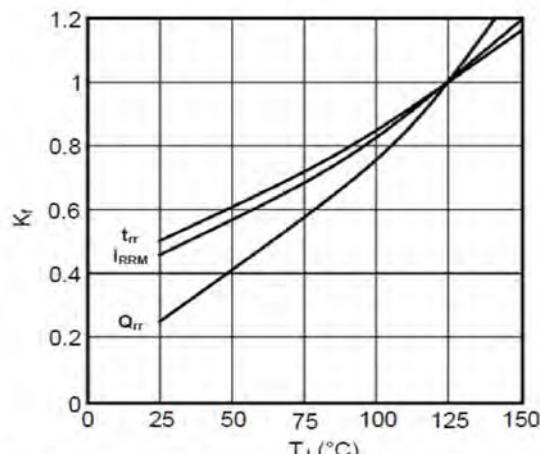


Fig5. Dynamic Parameters vs Junction Temperature


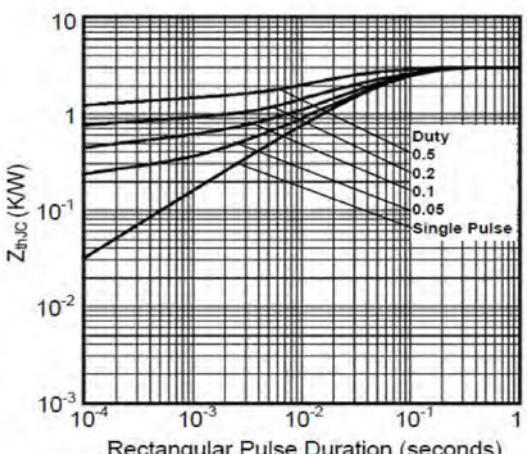


Fig6. Transient Thermal Impedance

## Package Outline Dimensions

in millimeters

TO-220-AB

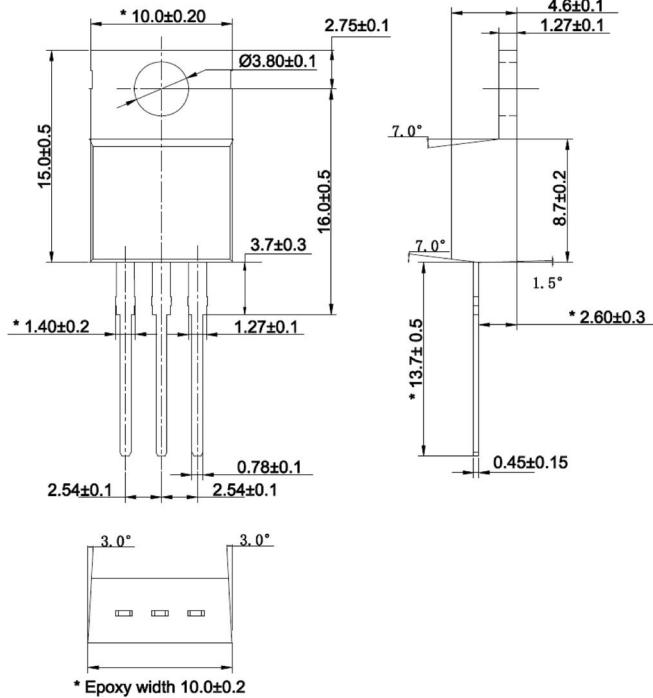

ITO-220-AB

