
OA4715 'Challenger Series'



AC Fan - 115V, 230V 120x38mm (4.7"x 1.5")



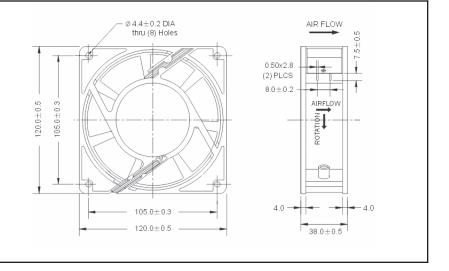

Frame	Diecast Aluminum	On a realise of Tarana a realisms		0.40
Impeller	PBT, UL94V-0 plastic	Operating Temperature Ball Bearing -10C ~ +70C	<u> </u>	0.35
Connection	Terminals	Storage Temp -20C ~ +80C	e ("H2O)	0.30
Motor	AC shaded pole, impedance protected	Life Expectancy Ball Bearing 60,000 hours (L10 at 40C)	ic Pressure	0.20
Bearing System	Dual ball	Weight: ~1.2 lbs.	Static	0.10
Insulation Resistance	>100M ohm between lead- wire and frame (500VDC)			0.05
Dielectric Strength	1 min at 1500 VAC, 50/60Hz	m4		0 20 40 60 80 100 120 Airflow (CFM)

Part Number	OA4715-12TB	OA4715-23TB
Nominal Voltage	115 VAC	230 VAC
Nominal Current	0.30 A	0.20 A
Rated Power	24 W (60Hz)	24 W (60Hz)
Rated Speed (RPM)	3000	3000
Airflow (CFM)	110	110
Noise Level (dB)	44	44
Max. Static Pressure	0.37" H ₂ O	0.37" H ₂ O



