
Customer Information Sheet

DRAWING No.: S13-503 IF IN DOUBT - ASK NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

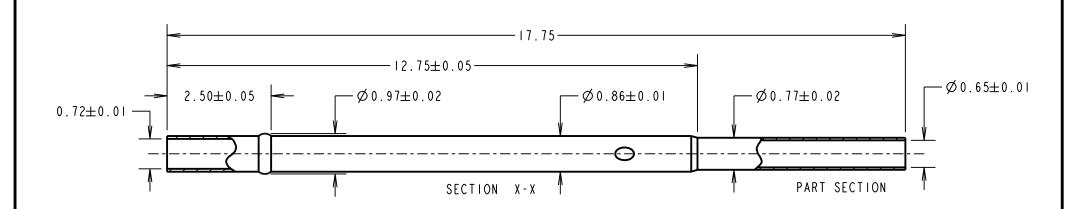

NOTES:

- I. TO BE USED WITH PROBES PI3-XX23.
- 2. SUITABLE FOR A MINIMUM DISTANCE BETWEEN CENTRES OF 1.27mm.
- 3. SPECIFICATIONS FOR PROBE PERFORMANCE ARE GIVEN ON THE PROBE DRAWING.
- 4. RECOMMENDED HOLE SIZE = \emptyset 0.95mm.
- 5. SUITABLE FOR USE WITH 30 AWG WIRE
- 6. PLATING = 0.05 \(\mu \) GOLD OVER 2.03

TRE (SOLDER).		
-3.05μ NICKEL.	ASSEMBLY	DRG:

mm²



www.harwin.com technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION

TOLERANCES X. = ± Imm $X.X = \pm 0.50 \text{mm}$ $X.XX = \pm 0.10$ mm

 $X.XXX = \pm 0.01$ mm ANGLES = $\pm 5^{\circ}$ UNLESS STATED

MATERIAL:

PHOSPHOR BRONZE

FINISH: SEE ABOVE S/AREA:

TITLE:

I.27mm MIN. CENTRE TWO-PIECE SPRING PROBE SLEEVE

DRAWING NUMBER:

\$13-503

27.01.16 13249

C/NOTE

SHT

2 OF

DATE

S.BENNETT

M. PERREN

APPROVED: M.PERREN

CUSTOMER REF.:

CHECKED:

DRAWN: