Specification for release

Customer:

Ordercode: **8231726**


Description : ESD Suppressor WE-VE femtoF





02.09.2008

A Dimensions:



	Size 0402	
А	1.0 ± 0.2	mm
В	0.5 ± 0.2	mm
С	0.6 max	mm
D	0.3 ± 0.2	mm

C Soldering spec.:

B Electrical properties:

B Electrical properties:						
Properties	Test Conditions		Value	Unit	Tol.	
DC operating voltage		V_{DC}	26	V	max	
capacitance	1 MHz	C_{typ}	0.05	pF	typ	
capacitance	1 MHz	C_{max}	0.15	pF	max	
leakage current	12 VDC	I _{L max}	0.05	μΑ	max	
trigger voltage	TLP measurement	V _{Tr}	300	V	typ	
clamping voltage	8kV Contact, 30ns	V _{Cl}	50	V	typ	
ESD withstand	8kV Contact		2000		min	

1.5 - 2.2	a [mm]
0.5	b [mm]
0.6	c [mm]
b	c

D Test equipment:	E Test conditions:				
Keithley 2410 for leakage Current		Humidity:		33%	
Agilent 4396B Analyzer for Capacitance		Temperatu	+20°C		
F Material & approvals:		G Gener	ral specifications:		
Base material: Ceramic		Storage temperature:		-20°C +60°C	
		Max. opera	iting temperature:	-40°C +85°C	
General Release:	Customer				
General Release:		<u> </u>			

General Release:	Customer	1		
General Nelease.				
Date	Signature			
	Würth Elektronik			
		SSt	Version 2	2010-06-25
		JB	Version 1	2008-09-02
Checked	Approved	Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400 http://www.we-online.com

Specification for release

Customer:


Ordercode: **8231726**


Description : ESD Suppressor WE-VE femtoF





H Typical Characteristics:

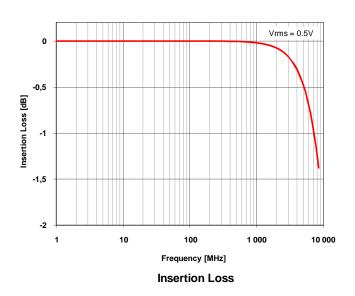



Capacitance vs. Frequency

General Release:	Customer			
General Release.				
Date	Signature			
	Würth Elektronik			
		SSt	Version 2	2010-06-25
		. JB	Version 1	2008-09-02
Checked	Approved	Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400 http://www.we-online.com

Specification for release

Customer: Ordercode:


8231726

Description: ESD Suppressor WE-VE femtoF






I Tape:

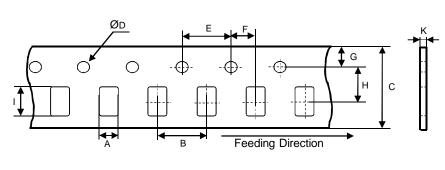


Α	0.69 typ	mm
В	2.00 ± 0.10	mm
С	8.0 +0.3/-0.1	mm
D	1.50 + 0.20	mm
Е	4.00 ± 0.10	mm
F	2.00 ± 0.10	mm
G	1.75 ± 0.10	mm
Н	3.50 ± 0.05	mm
	1.19 typ	mm
J	0.66 max	mm

J Reel:



а	178.0 ± 2.0	mm
b	13.0 ± 0.8	mm
C	7.9 min	mm
d	14.4 max	mm
е	1.5 min	mm



Quantity per Reel:	10000 pcs
--------------------	-----------

General Release:	Customer			
General Nelease.				
Date	Signature			
	Würth Elektronik			
		SSt	Version 2	2010-06-25
		. JB	Version 1	2008-09-02
Checked	Approved	Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400 http://www.we-online.com