



FEMALE -FACE VIEW

MALE-FACE VIEW




- 1 BLACK
- 2 GREEN-YELLOW
- 3 RED
- 4 WHITE

CC4030A47M020

Cable type  
12/4C AWG  
Gray PVC

Cable length  
M020----2 Meter  
M100----10 Meter

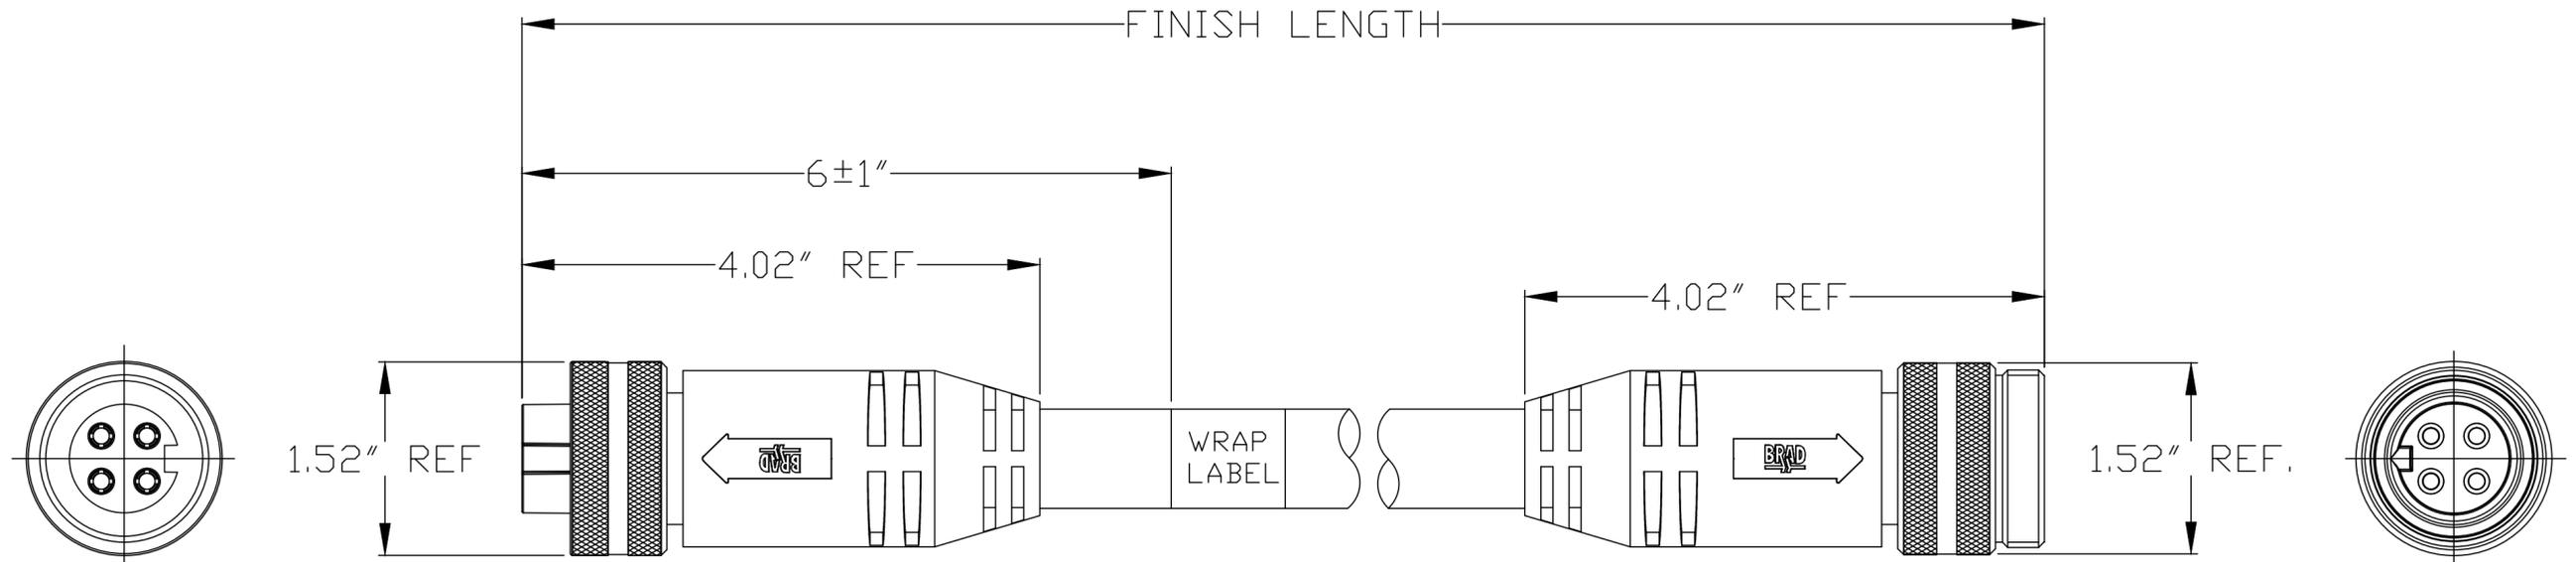

MECHANICAL  
 CONTACT : GOLD PLATED COPPER ALLOY  
 INSERT : BLACK PVC  
 COUPLING NUT: ANODIZED ALUMINUM  
 MOLDED BODY: GRAY PVC  
 CABLE: 12 AWG 4 CONDUCTORS GRAY PVC CORD WITH BLACK STRIP

ELECTRICAL  
 VOLTAGE RATING: 600V AC/DC  
 AMPERAGE: 20A

ENVIRONMENTAL  
 PROTECTION: IP67 PER  
 OPERATION TEMP: -20°C to 90°C

EC NO: IFC2016-0242 DRWN: TWOLDEGE 2015/08/12 CHKD: TWOLDEGE 2015/08/12 APPR: JFMURPHY 2015/08/12 REV A	QUALITY SYMBOL ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±--- ±.010 1 PLACE ±--- ±.020	DIMENSION STYLE INCHES DRAWN BY BH DATE 2003/04/17 CHECKED BY TWOLDEGE DATE 2015/08/12 APPROVED BY JFMURPHY DATE 2015/08/12	SCALE NTS DESIGN UNITS INCH THIRD ANGLE PROJECTION	TITLE QUICK CHANGE FEM/ MALE STR/STR 4 POLE AC EXTS
	ANGLE ±.5° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	MOLEX INCORPORATED DOCUMENT NO. SD-130064-008 SHEET NO. 1 OF 1		