


**Recommended PCB Layout**

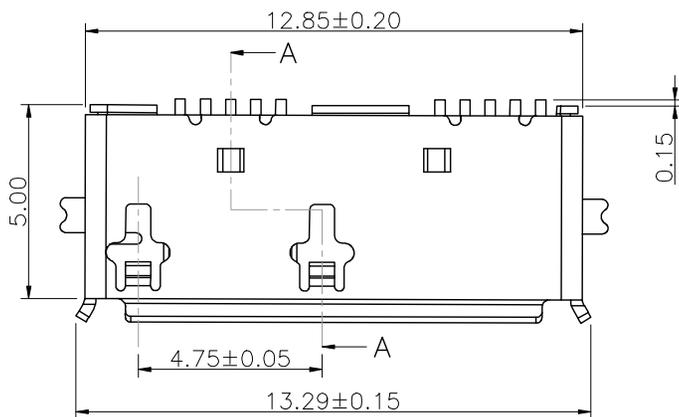

**Material:**

- Insulator: LCP color-Black
- Shell: 0.3MM Thickness, Flash
- USB Contact: Brass 0.15MM Thickness, selective gold
- Plated on contact area, gold flash plated on solder tail
- Plated on the soldering tab

Unit: MM±0.20MM



**ITEM NO.**  
**AU-Y1009/3-AB-R**  
**TITLE**  
 USB Micro Connector 3.0 - SMT, AB Female Type,  
 15µ, 10-pin for PCB Mount

**ASSMANN**  
 Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
 ©Copyright 2011 by Assmann Electronic Components  
 All International Rights Reserved