


Unit: mm

RoHS Compliant

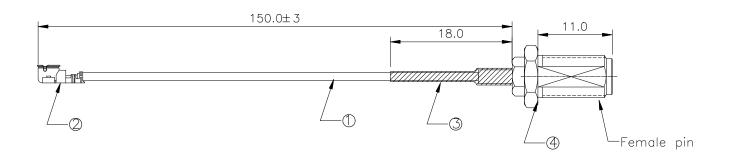

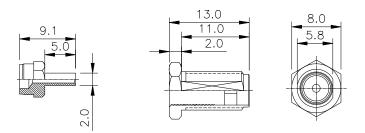

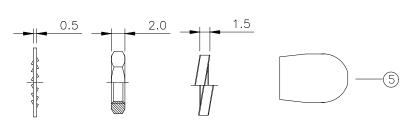

LOCK WASHER HEX NUT SPRING WASHER RED HAT

Note: parts in bulk, 100SET/bag

ELECTRICAR CHARACTERISTICS REQUIREMENTS:

1.Product must be 100% conductionr, open circuit short circuit test.

2.Conductive resistance: 20Ω

3.Rated voltage: AC 60V

4.Withstand voltage: AC 200V 5.Insulation resistance:500m Ω

6.characteristic impedance: 50Ω

7. Adopt environmental protection process and

meet ROHS requirements 8. Tensile test: 1.5kg~

9. The general tolerance shall prevail if no tolerance is noted

nd -	5	COVER		RED HAT PACKING SMA	1	_		
	4	SMA FEMALE	_	11*1.78-ZYK-OPENING WELDING GOLD PLATING	1	_		
	3	HEAT SHRINK SLEEVE	_	2.0*18MM BLACK HEAT SHEINK SLEEVE	1	_		
	2	IPEX-1.37 CONN	_	IPEX-1.37 BRASS GOLD	1	_		
	1	COAXIAL CABLE	_	RG1.37 GRAY-48-TIN-FEP JACKET L=155mm	1	155		
	ITEM	PART No.	VENDOR	DESCRIPTION	Q'TY	OVERALL		
	MATERIAL SPECIFICATION							

3			DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCR	IPTION	瀚勃	E股份有限公司	CUST. CODE
2			LuLu	Iron	Iron	Waleed	RF CABLE		CviLu	ıx Corporation	CUC
\triangle				08/21.20'	08/21.20'	08/21.20	IN CABLL	$\Psi \cup$	DRAWING No.	CviLux P/N	CUSTOMER P/N
SYM	NAME DATE	REVISIONS					SHEET:	1 OF 1	DH50628A	DH-20G50014	_