


Shielded HF Pad Antenna ID ISC.ANTS370/270 ID ISC.SPAD102



FEATURES

- More than 30 cm read range
- Modern design
- No tag reading outside of the antenna area
- Optical feedback via LED
- No detuning of the antenna when installing on metal or rather conductive material
- Available as external antenna or with integrated reader

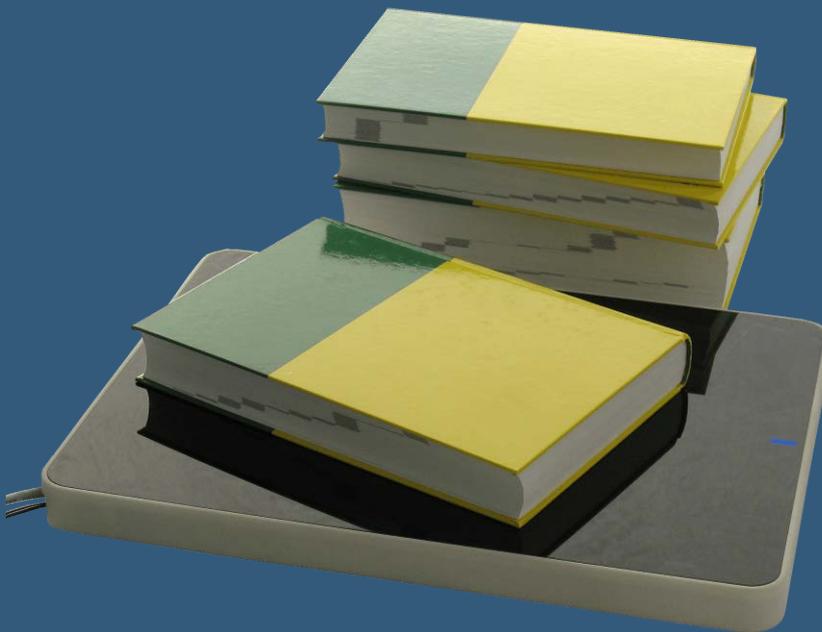

ID ISC.ANTS370/270-A

DESCRIPTION

The ID ISC.ANTS370/270-A is designed as a very flat and external antenna for contactless data exchange with common HF transponders and is attractive with its outstanding performance and the modern design.

With these features the antenna is suitable for desktop applications in offices and libraries to trace files or documents and to detect lendable items at the check out or return point. The read range with single transponders could reach more than 30 cm.

Due to its integrated shielding transponders will be detected only inside the antenna area and interferences between several antennas will be minimized. Additionally the installation on metallic or conductive surfaces has no influence on the antenna. Therefore the ID ISC.ANTS370/270-A could be used in normally unsuitable environments.

The antenna ID ISC.ANTS370/270-A has an included coaxial cable to connect it directly to a reader. To indicate different conditions the blue LED could be powered with a DC voltage on the antenna output of the reader.



ORDER DESCRIPTION

ID ISC.ANTS370/270-A Shielded, external antenna with coaxial cable

TECHNICAL DATA

Dimensions (W x H x D)	376 mm x 276 mm x 27 mm (14,8 inch x 10,9 inch x 1,1 inch)
Weight	approx. 2 kg (4,4 lbs)
Housing	
- Pad	Acrylic glass
- Upper part	Plastic SB
- Lower part	Zincd steel
Colour	
- Pad	transparent; black
- Upper part	similar RAL 9003 (white)
Protection class	IP 30
Temperature range	
- Operation	-25 °C up to 55 °C (-13 °F up to 131 °F)
- Storage	-25 °C up to 70 °C (-13 °F up to 158 °F)
Relative air humidity	5...95 % (non-condensing)
Operating frequency	13,56 MHz
Max. input power	1,5 W
Antenna connection	RG58 coaxial cable with SMA connector (50 Ω); approx. 2,3m long (90.5 inch)
Indicator, optical	1 LED (blue; switchable via DC voltage at the antenna output of the reader)

STANDARD CONFORMITY

EMC	EN 301 489
Safety	
Electrical safety	EN 60950
Human exposure	EN 50364

FEIG ELECTRONIC reserves the right to change specification without notice at any time.
Stand of information: August 2016.

ID ISC.SPAD102

DESCRIPTION

The ID ISC.SPAD102 is designed as a very flat and shielded antenna with integrated reader for contactless data exchange with ISO 15693 transponders and is attractive with its outstanding performance and the modern design.

With these features the antenna is suitable for desktop applications in offices and libraries to trace files or documents and to detect lendable items at the checkout or return point. The read range with single transponders could reach more than 30 cm.

Due to its integrated shielding transponders will be detected only inside the antenna area and interferences between several antennas will be minimized. Additionally the installation on metallic or conductive surfaces has no influence on the antenna. Therefore the ID ISC.SPAD102 could be used in normally unsuitable environments.

The antenna ID ISC.SPAD102 is available with an USB interface and can be integrated into existing background systems easily.



ORDER DESCRIPTION

ID ISC.SPAD102-USB	Shielded antenna with integrated reader; USB
ID ISC.SPAD102-E	Shielded antenna with integrated reader; LAN interface (on demand)

TECHNICAL DATA

Dimensions (W x H x D)	376 mm x 276 mm x 27 mm (14,8 inch x 10,9 inch x 1,1 inch) approx. 2 kg (4,4 lbs)
Weight	
Housing	
- Pad	Acrylic glass
- Upper part	Plastic SB
- Lower part	Zincd steel
Colour	
- Pad	transparent; black
- Upper part	similar RAL 9003 (white)
Protection class	IP 30
Temperature range	
- Operation	-25 °C up to 55 °C (-13 °F up to 131 °F)
- Storage	-25 °C up to 70 °C (-13 °F up to 158 °F)
Relative air humidity	5...95 % (non-condensing)
Operating frequency	13.56 MHz
Max. transmitting power	1,5 W ± 1 dB
Supply voltage	12...24 V DC
Power consumption	max. 6 W
Interfaces	
- Variant -USB	USB
- Variant -E	LAN
Indicator, optical	1 LED (blue)
Supported transponders	ISO 15693 (ISO 18000-3 MODE 1)*
Protocol modes	ISO Host Mode, Scan Mode**, Notification Mode
Others	Temperature monitoring

* e.g. EM HF ISO Chips, Fujitsu HF ISO Chips, IDS Sensor Chips, Infineon my-d, KSW Sensor Chips, NXP I-Code, STM ISO Chips, TI Tag-it

** ID ISC.SPAD102 operates in HID mode if the integrated USB reader is configured in Scan Mode.

STANDARD CONFORMITY

Radio license	
Europe	EN 300 330
USA	FCC 47 CFR Part 15
Canada	IC RSS-GEN, RSS-210
EMC	EN 301 489
Safety	
Electrical safety	EN 60950
Human exposure	EN 50364

FEIG ELECTRONIC reserves the right to change specification without notice at any time.
State of information: August 2016.