

MODEL NUMBER
ADT-2810-NF-SMM-02

NOTES:

1.0 MATERIALS:

1.1 HOUSING, NUT & WASHER: STAINLESS STEEL PER ASTM-A582, TYPE 303

1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.

1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.

2.0 PLATING:

2.1 HOUSING, NUT & WASHER: PASSIVATED PER MIL-F-14072 AND QQ-P-35

2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2.


3.0 ELECTRICAL SPECIFICATIONS:

3.1 FREQUENCY: DC - 18GHz

3.2 VSWZ: 1.20 MAX

3.3 IMPEDANCE: 50 OHMS

3.4 FINISH: PASSIVATED STAINLESS STEEL

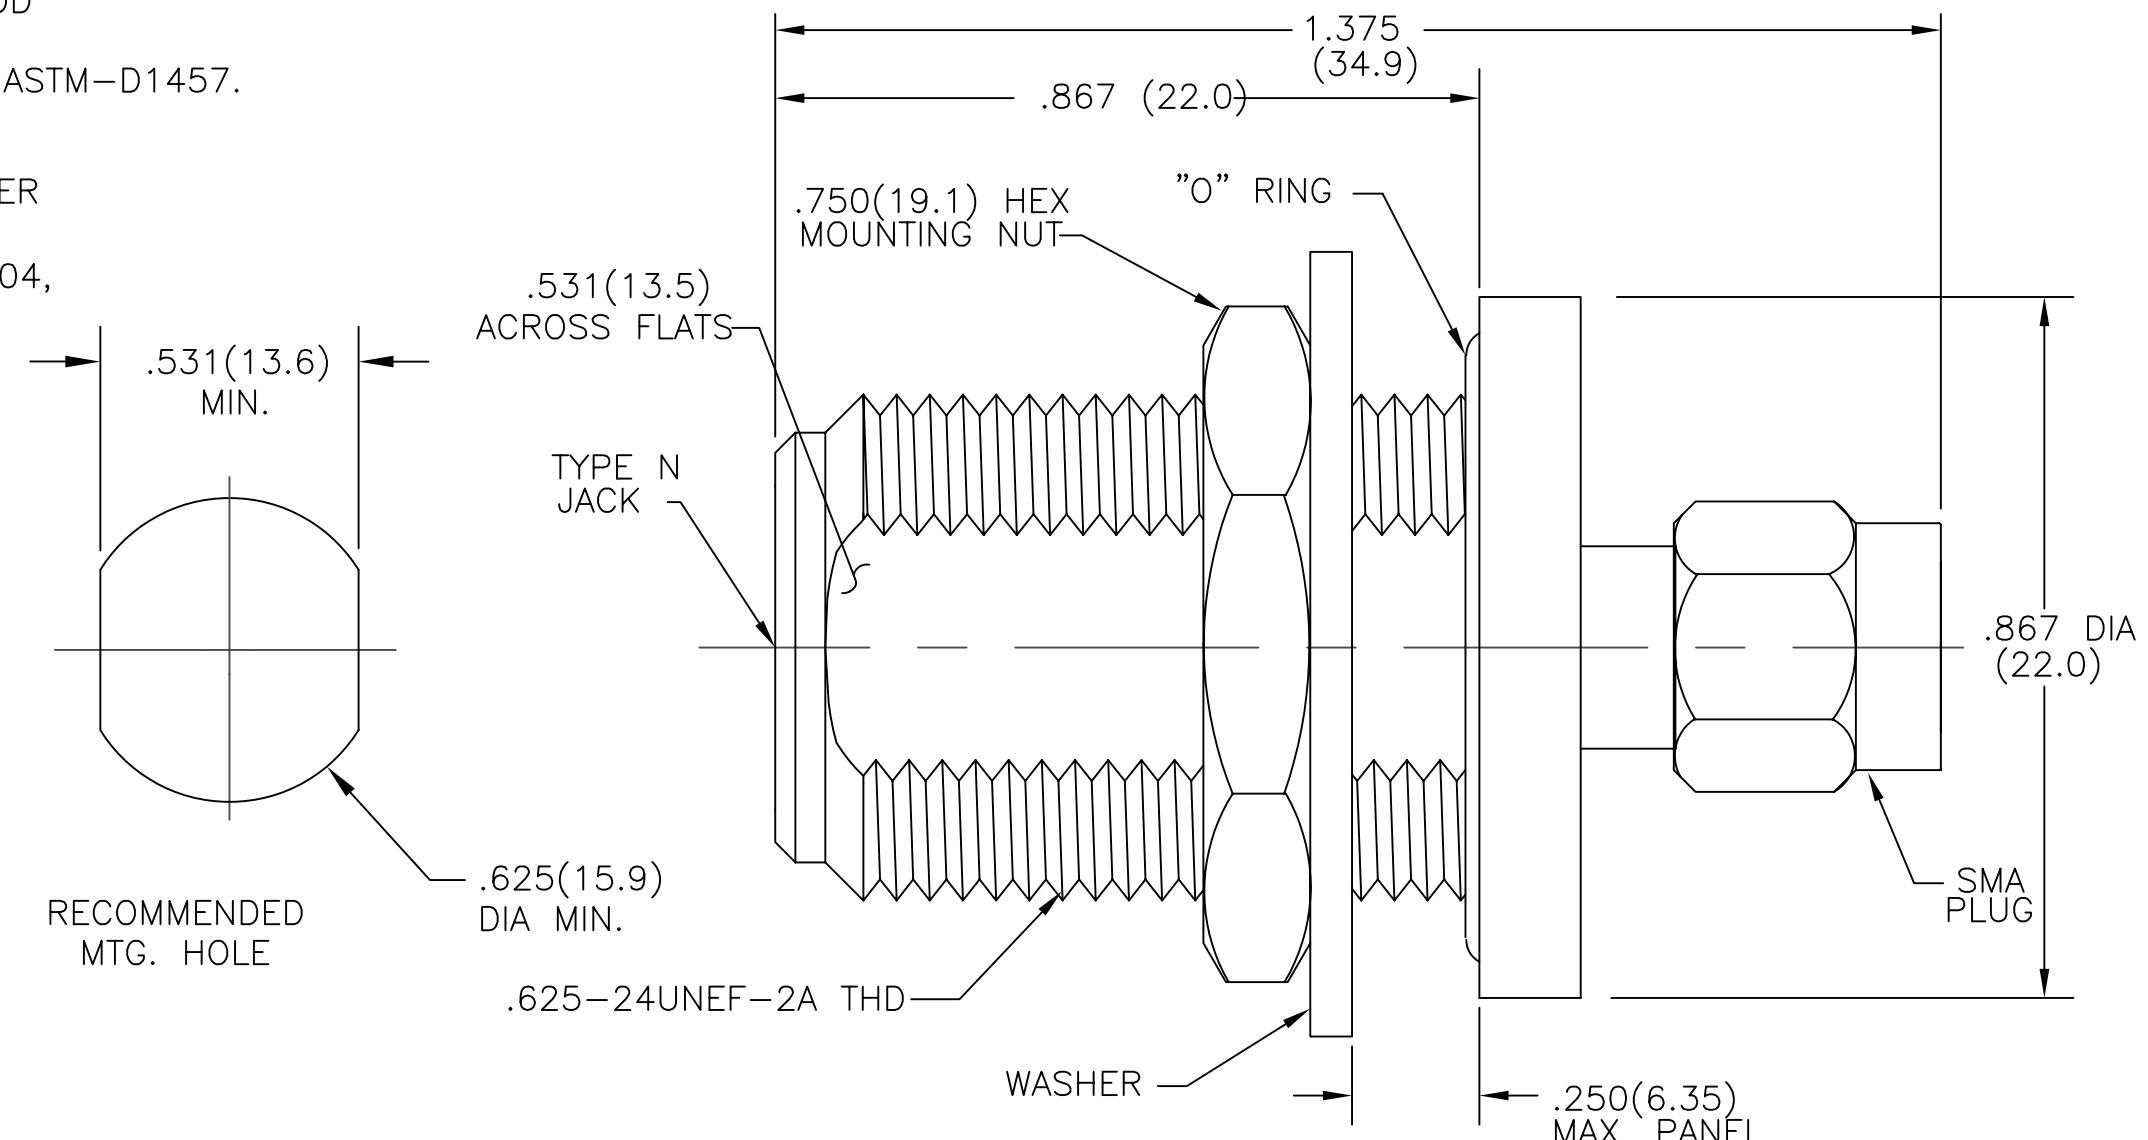

REV.	DESCRIPTION	DATE
	RELEASED	
-1	REPRINT	9/29/98
B	ECO 23152	1/22/04

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS $\pm .005$

2 PLACE DECIMALS $\pm .02$

FRACTIONS $\pm 1/64$

PARALLELITY: T.I.R. _____

FLATNESS: T.I.R. _____

CONCENTRICITY: T.I.R. _____

ANGLES AND PERPENDICULARITY: $\pm 1^\circ$

CAGE CODE
34078

MIDWEST MICROWAVE



EMERSON
Network Power
Connectivity Solutions

DRAWN/DATE
L.BROWN
9/25/98

CHECKED/DATE

ENG./DATE
G.KOZAK
9/29/98

APPROVED/DATE

TITLE

ADAPTER
OUTLINE DRAWING

DRAWING NUMBER

ADT-2810-NF-SMM-02-01

REV.

B

SCALE: 5=1

SHEET 1 of 1