


KEY POS	PART NO.
N	RTHP0121PN-H1
W	RTHP0121PW-H1
Х	RTHP0121PX-H1
Y	RTHP0121PY-H1
Z	RTHP0121PZ-H1

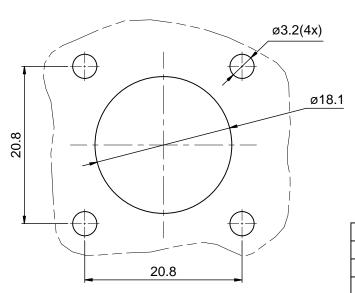


Mounting Hole

2. SPECIFICATIONS:

- 8 - 8 - 8 - 8 - 8

- 2.1 CURRENT RATING: 86 AMPS MAX.
- 2.2 VOLTAGE RATING: 630 V AC/DC
- 2.3 OPERATING TEMPERATURE: -40°C TO +125°C
- 2.4 DIELECTRIC WITHSTANDING VOLTAGE:
 - LESS THAN 2 MILLIAMPS CURRENT IEAKAGE @ 5000 VOLTS AC
- 2.5 DEGREE OF PROTECTION: IP67 (MATED CONDITION)
- 2.6 DEGREE OF POLLUTION: 3 PER UL840
- 2.7 OVERVOLTAGE CATEGORY: III PER UL840
- 2.8 MATING CYCLE DURABILITY: >100 CYCLES
- 2.9 RoHS COMPLIANT
- 3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 4. "*" DENOTE KEY POSTION OF "N", "W", "X", "Y" OR "Z".
- 5. CONTACT P/N: HPAHS

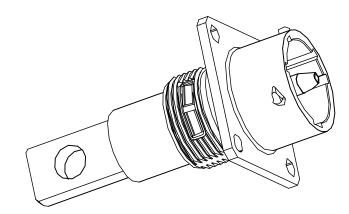

	SEE PART NUIVIBER CHART								
QUANTITY	PART NUMBER		DESCRIPTION			ITEM			
MATERIALS LIST									
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm).		SIGNATURES	S DATE	Amphonol					
2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64	Drack Drack	08/14/14	Amphenol						
2 PL DEC ±0.15 3 PL DEC ±0.08		CHECKED:		Sine Systems - www.amphenol-sine.com					
3) Note reference	= X	ENGINEER:		44724 Morley Drive		00			
MATERIAL SPECIFICATIONS:		APPROVAL:		Clinton Township, MI 48036					
		CUSTOMER:		ECO-MATE,RECEPTACLE,3.6mm SINGLE PIN CONTACT,					
THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS: SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL			FLATE HOLE TYPE,FLANGE WALL MOUNTING						
		B C-	RTHP01	21P*-H1	B1				
NEXT ASS'Y:	MANUFACTURING VARIATIONS.		SCALE: 2 · 1		SHEET 1 OF	1			

RTHP0121P*-H1

Β,