Specification for release

Customer:


Ordercode: **8231626**

Description: ESD Suppressor WE-VE femtoF





A Dimensions:



	Size 0603	
А	1.6 ± 0.2	mm
В	0.8 ± 0.2	mm
С	0.9 max	mm
D	0.3 ± 0.2	mm

C Soldering spec.:

B Electrical properties:

Checked

B Electrical properties:							
Properties	Test Conditions		Value	Unit	Tol.		
DC operating voltage		V_{DC}	26	V	max		
capacitance	1 MHz	C_{typ}	0.05	pF	typ		
capacitance	1 MHz	C_{max}	0.15	pF	max		
leakage current	12 VDC	I _{L max}	0.05	μΑ	max		
trigger voltage	TLP measurement	V _{Tr}	300	V	typ		
clamping voltage	8kV Contact, 30ns	V _{CI}	50	V	typ		
ESD withstand	8kV Contact		2000		min		

2.2 - 2.6 a [mm]
0.7 b [mm]
0.7 c [mm]

D Test equipment:	E Test conditions:	E Test conditions:		
Keithley 2410 for leakage Current	Humidity:	33%		
Agilent 4396B Analyzer for Capacitance	Temperature:	+20°C		
F Material & approvals:	G General specifications:			
Base material: Ceramic	Storage temperature:	-20°C +60°C		

	Max. oper	ating tem	perature:	-40°C +85°C	
General Release:	Customer				
General Nelease.					
Date	Signature				
	Würth Elektronik				
		SSt	Version 2	2010-06-25	
		IB	Version 1	2008-09-02	

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

Approved

Name

Modification

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400 http://www.we-online.com

Specification for release

Customer:


Ordercode: **8231626**


Description: ESD Suppressor WE-VE femtoF





H Typical Characteristics:

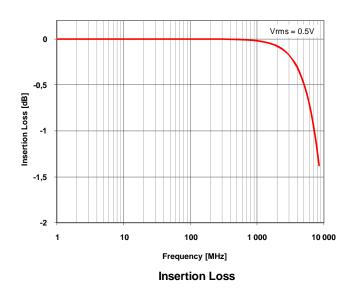



Capacitance vs. Frequency

General Release:	Customer			
General Release.				
Date	Signature			
	Würth Elektronik			
		SSt	Version 2	2010-06-25
		. JB	Version 1	2008-09-02
Checked	Approved	Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400 http://www.we-online.com

Specification for release

Customer: Ordercode:


8231626

Description: ESD Suppressor WE-VE femtoF






I Tape:

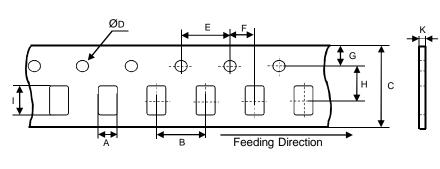


Α	1.10 typ	mm
В	4.00 ± 0.10	mm
C	8.0 +0.3/-0.1	mm
Δ	1.50 + 0.20	mm
Ш	4.00 ± 0.10	mm
F	2.00 ± 0.10	mm
G	1.75 ± 0.10	mm
Ι	3.50 ± 0.05	mm
	1.88 typ	mm
J	1.10 max	mm
	B C D E F	B 4.00 ± 0.10 C 8.0 +0.3/-0.1 D 1.50 + 0.20 E 4.00 ± 0.10 F 2.00 ± 0.10 G 1.75 ± 0.10 H 3.50 ± 0.05 I 1.88 typ

J Reel:



а	178.0 ± 2.0	mm
b	13.0 ± 0.8	mm
С	7.9 min	mm
d	14.4 max	mm
е	1.5 min	mm



General Release:	Customer			
General Nelease.				
Date	Signature			
	Würth Elektronik			
		SSt	Version 2	2010-06-25
		JB	Version 1	2008-09-02
Checked	Approved	Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400 http://www.we-online.com