

CUSTOMER PRINT


PART NUMBER: CARA16280XPXXX90

- NOTES:
 1. FINISHED CABLE ASSEMBLY TO BE COILED
 2. OVERMOLD BOOT MATERIAL: PVC, BLACK
 3. ELECTRICAL TEST: 100% CONTINUITY


ASS'Y P/N	NO. OF POSITION	"X" DIM.
CARA162802P07990	2 POS.	6 FT. 7 IN. ± 2 IN. [2M]
CARA162803P07990	3 POS.	
CARA16280XPXXX90		

CABLE LENGTH IN "INCHES"

NO OF POSITIONS

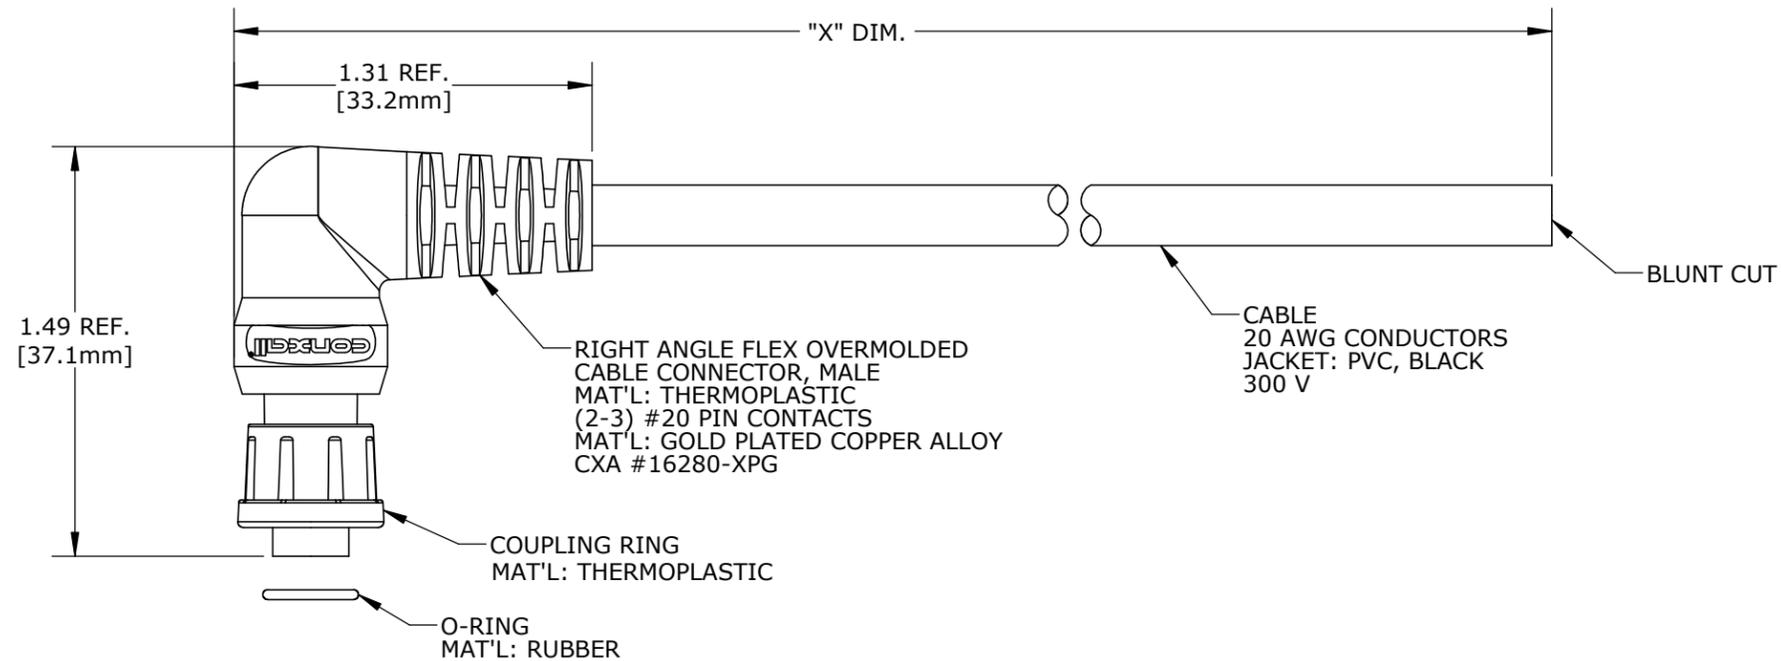


END "A"

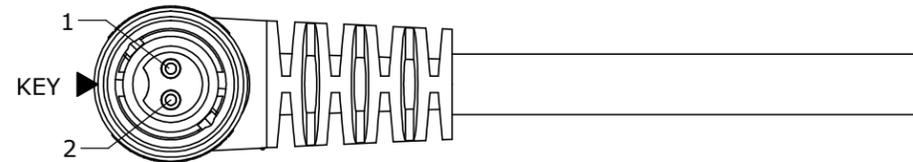

FACE VIEW

P/N: CARA162802PXXX90

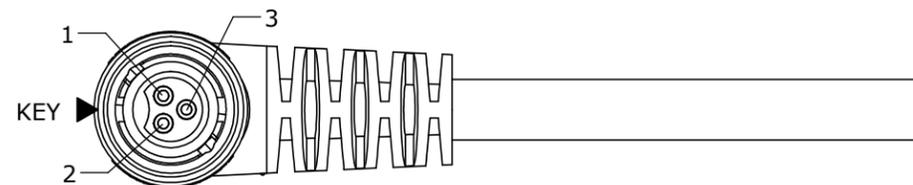

FACE VIEW

P/N: CARA162803PXXX90

DIMENSIONS IN BRACKET [] ARE METRIC.

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
 DATE: _____

RoHS COMPLIANT

ASSY P/N	CABLE	COLOR CODE END "A"		
CARA162802PXXX90	2/20 AWG O.D. 0.215 REF	COLOR CODE		
		POS. 1	POS. 2	
		BLK	WHT	
CARA162803PXXX90	3/20 AWG O.D. 0.220 REF	WIRE COLOR CODE		
		POS. 1	POS. 2	POS. 3
		BLK	WHT	GRN

B	AB	09-10-19	NEW FLEX OVERMOLD PER DOR 19-SQ104238JS
A	AN	11-08-16	DRAWING CREATED PER DOR 16-7663JP
REV.	INIT.	DATE	DESCRIPTION
	AN	11-07-16	
ORIG. DRAWN BY:		DATE:	<p>601 E. WILDWOOD VILLA PARK, IL 60181</p>
CHECKED BY:			
APPROVED BY:		TITLE:	CABLE ASSEMBLY (2-3) #20 PIN CONTACTS MICRO-CON-X, R. ANGLE STANDARD PRODUCT
SCALE	SIZE	SHEET	CUSTOMER:
NTS	B	1 OF 1	CARA16280XPXXX90
FILE:	DIRECTORY:	PART NUMBER:	REV
CARA16280XPXXX90	SLW	CARA16280XPXXX90	B

ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.

ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.

△ - CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX