


(View the NorComp [D-Sub Connector](#) Catalog here)

FRONT MOUNTED

	A	B	C	D	E	F	G	H
9 STD / 15 H.D.	0.984 [24.99]	0.815 [20.70]	0.626 [15.90]	0.492 [12.50]	0.530 [13.47]	0.460 [11.68]	0.230 [5.84]	0.271 [6.88]
15 STD / 26 H.D.	1.312 [33.32]	1.142 [29.00]	0.953 [24.20]	0.656 [16.66]	0.857 [21.77]	0.460 [11.68]	0.230 [5.84]	0.271 [6.88]
25 STD / 44 H.D.	1.852 [47.04]	1.685 [42.80]	1.496 [38.00]	0.926 [23.52]	1.400 [35.57]	0.460 [11.68]	0.230 [5.84]	0.271 [6.88]
37 STD / 62 H.D.	2.500 [63.50]	2.331 [59.20]	2.142 [54.40]	1.250 [31.75]	2.046 [51.97]	0.460 [11.68]	0.230 [5.84]	0.271 [6.88]
50 STD / 78 H.D.	2.406 [61.11]	2.236 [56.80]	2.047 [52.00]	1.203 [30.54]	1.916 [48.66]	0.562 [14.28]	0.281 [7.14]	0.373 [9.48]


TOLERANCE = +0.010/-0.000 inch

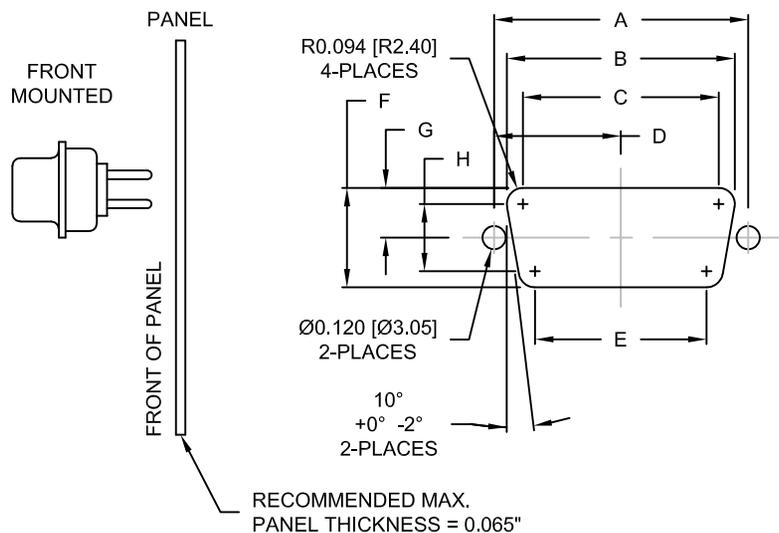

BACK MOUNTED

	A	B	C	D	E	F	G	H
9 STD / 15 H.D.	0.984 [24.99]	0.806 [20.47]	0.609 [15.46]	0.492 [12.50]	0.530 [13.46]	0.420 [10.67]	0.210 [5.33]	0.223 [5.66]
15 STD / 26 H.D.	1.312 [33.32]	1.134 [28.80]	0.937 [23.79]	0.656 [16.66]	0.858 [21.79]	0.420 [10.67]	0.210 [5.33]	0.223 [5.66]
25 STD / 44 H.D.	1.852 [47.04]	1.674 [42.52]	1.477 [37.51]	0.926 [23.52]	1.398 [35.51]	0.420 [10.67]	0.210 [5.33]	0.223 [5.66]
37 STD / 62 H.D.	2.500 [63.50]	2.326 [59.08]	2.129 [54.07]	1.250 [31.75]	2.050 [52.07]	0.420 [10.67]	0.210 [5.33]	0.223 [5.66]
50 STD / 78 H.D.	2.406 [61.11]	2.218 [56.34]	2.021 [51.32]	1.203 [30.54]	1.895 [48.12]	0.555 [14.10]	0.278 [7.05]	0.358 [9.08]

TOLERANCE = ±0.005 inch

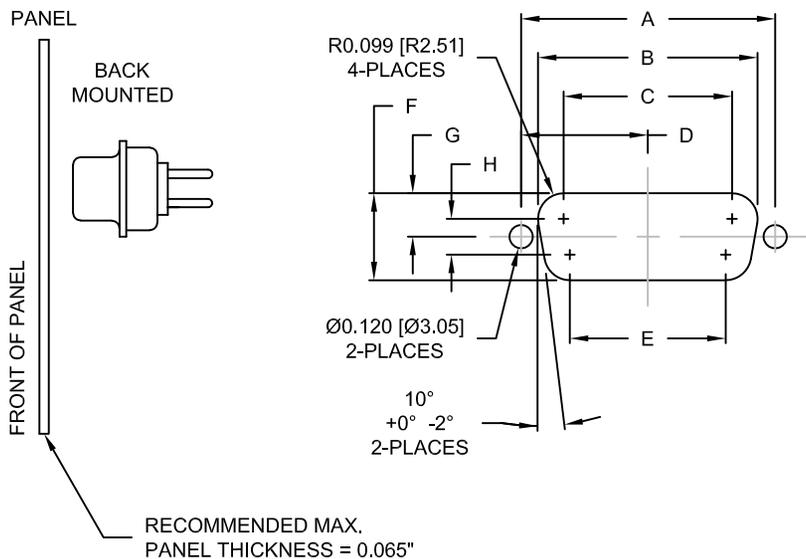

RoHS COMPLIANT

UNITS = inch[mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
J. KADEL
DATE:
01/24/2019

NorComp

SCALE: NTS SHEET 1 OF 1 REV 12
DWG NO. PANEL CUTOUTS D-SUB - SINGLE