


NOTES:

1. MATERIALS AND FINISHES:
 BODY & NUT HEX - BRASS, SILVER PLATING
 CONTACT -BeCu, GOLD PLATING
 INSULATOR - PTFEE, NATURAL
 LOCK WASHER - PHOSPHOR BRONZE, SILVER PLATING
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. FREQUENCY RANGE: DC - 4 GHz
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65°C TO +165°C
4. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOL RF, 31-3376 AND DATE CODE"


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	--	--	--
V	CORRECT PLACEMENT OF STAMP	10-Apr-13	49499	CPM
W	METRIC UNITS ADDED	18-Oct-18	09423	BEW

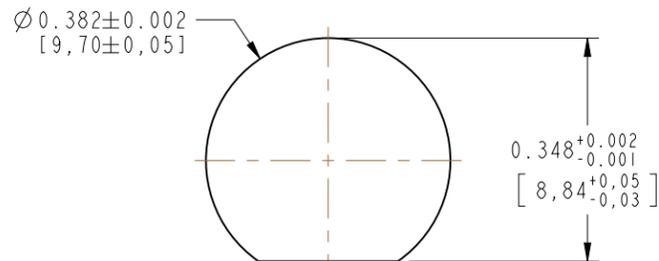

RECOMMENDED MOUNTING HOLE DIMENSIONS

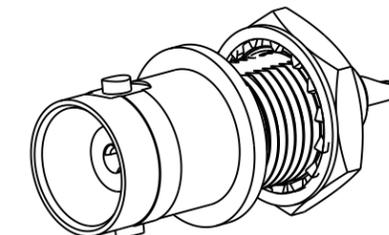

SCALE 2.000

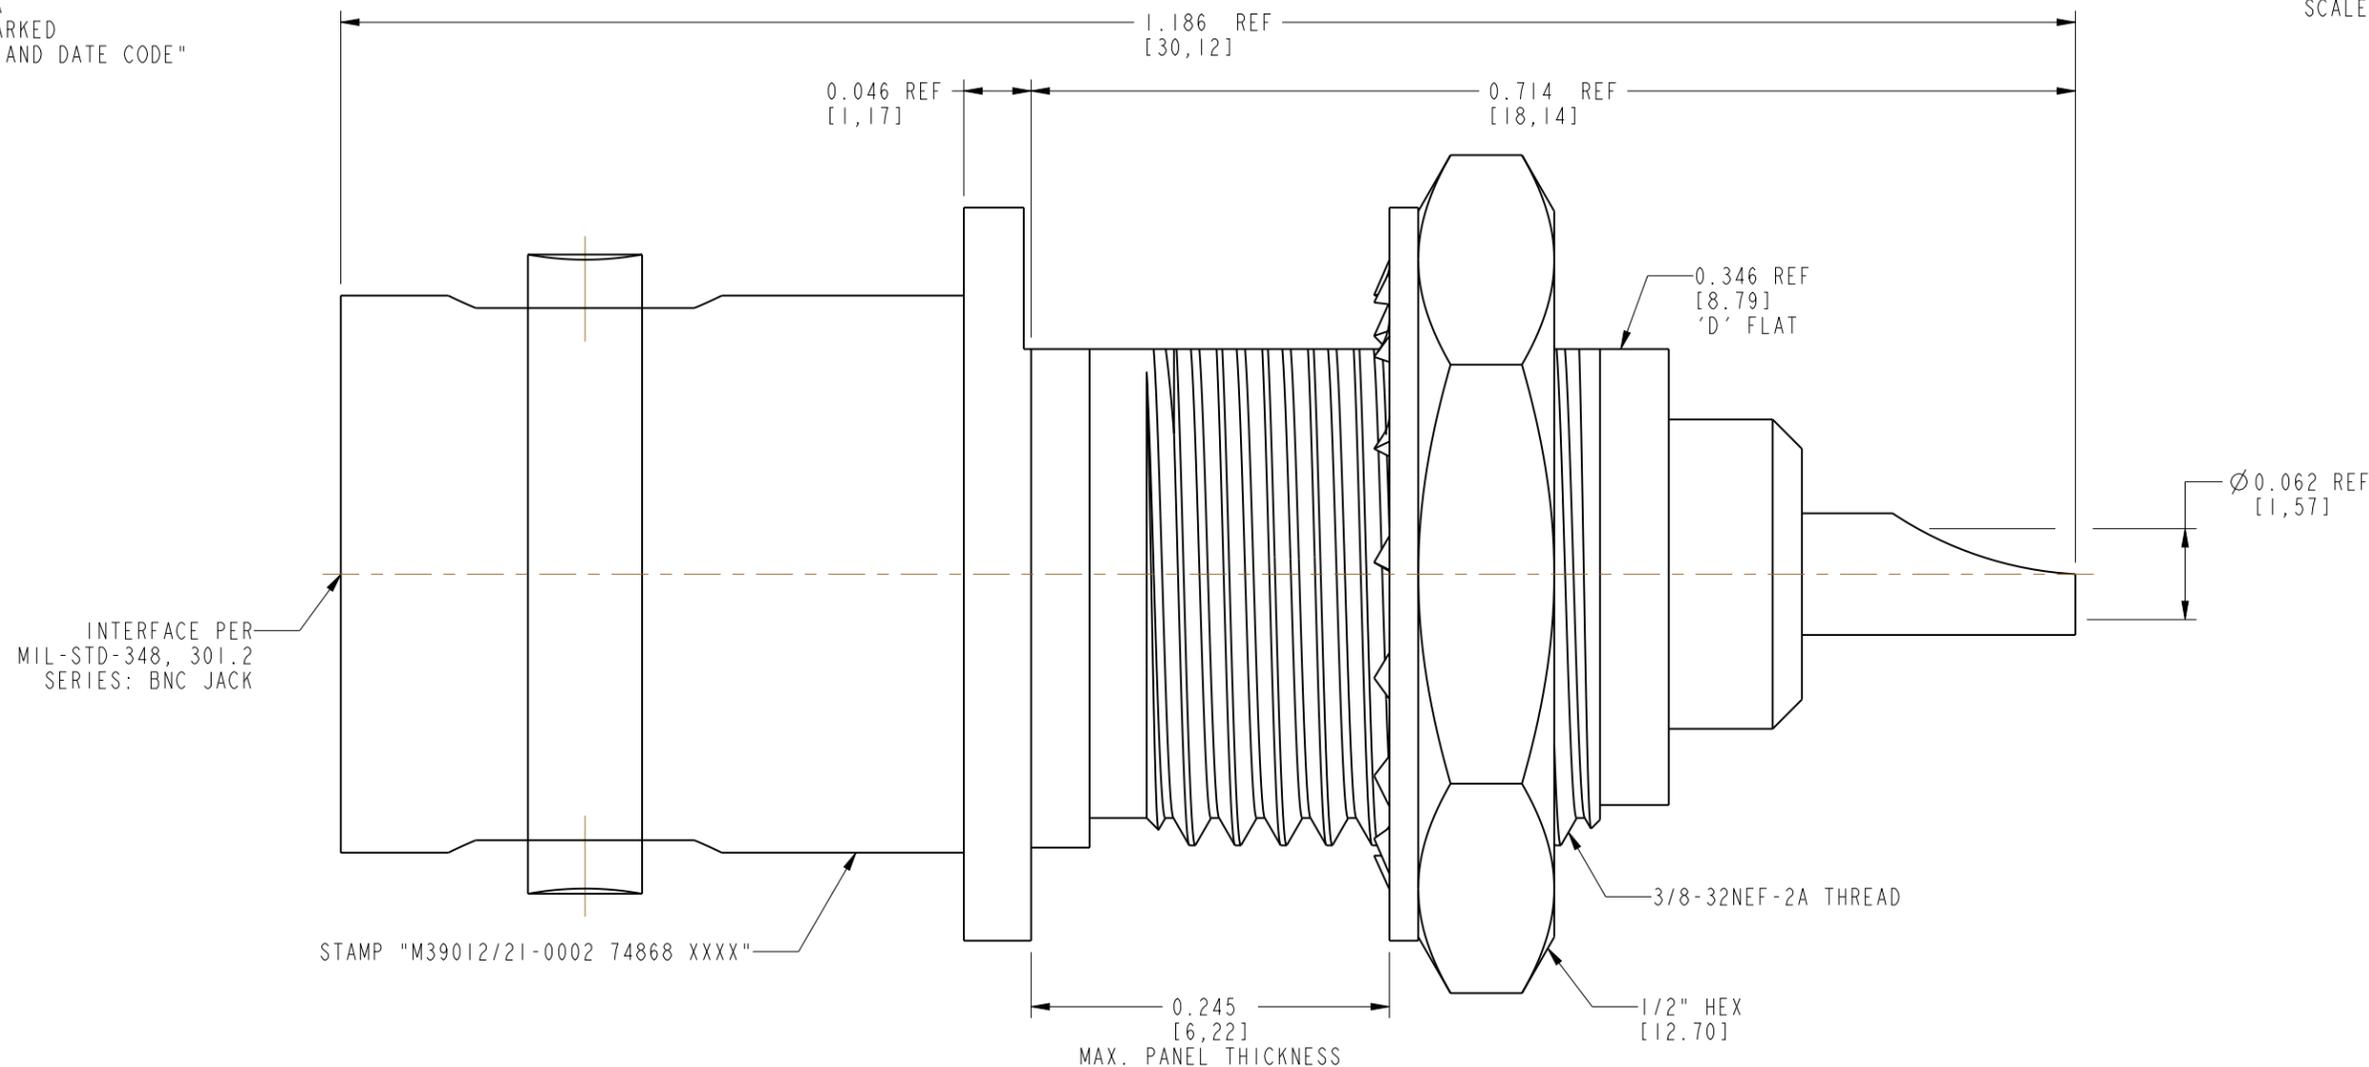

MIL-C-39012 INSPECTION

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ± 0.015 (0,381 mm) ± 0.005 (0,127 mm) $\pm 1^\circ$	MATERIAL	DRAWN	DATE	TITLE		Amphenol RF	
	SEE BOM TABLE	CLEMENT	17-Dec-09				
	REFERENCE	ENGINEER	DATE	SCALE: 8.0:1.0 SHEET 2 OF 2		DRAWING NO. 31-3376	
	MIL-C-39012/21-0002, GE SPEC 19A115938	H. HUTTER	09-Jun-70				
CONFIGURATION LEVEL: In Work	APPROVED	DATE	PART NO. 31-3376				
FINISH	CAD FILE						

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.